


Ⓐ piston rod processing per STAB-Spec. 10028959, table 1


The print-out is not subject to the modification service.

Intended for internal and supplier use

EN

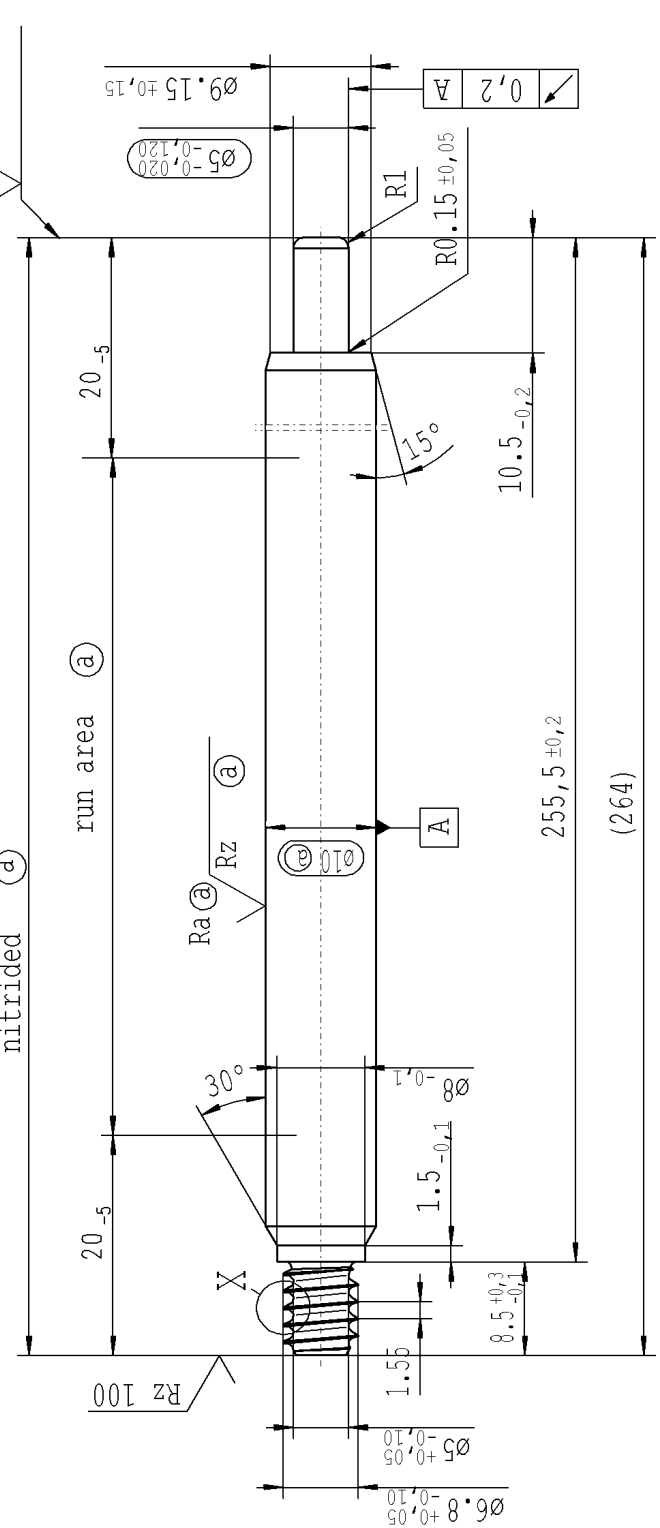

pre-worked:

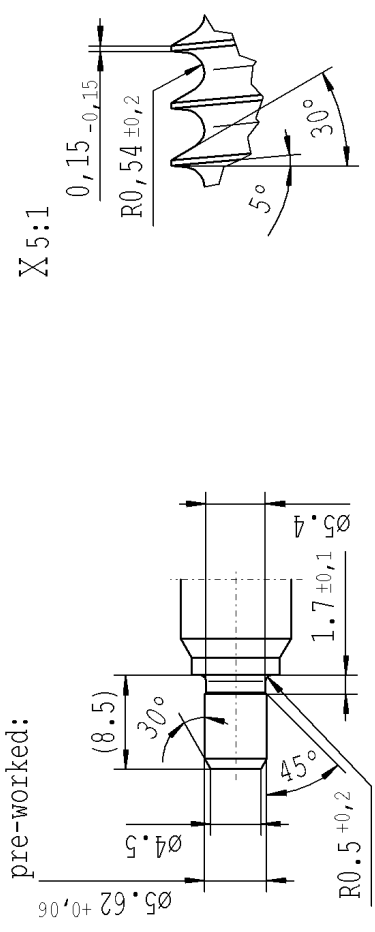

$\sqrt{\text{Rz 25}}$ ($\sqrt{\text{Rz 100}}$) $\sqrt{\text{Ra} \oplus}$ $\sqrt{\text{Rz} \oplus}$ $\sqrt{\text{Ra} \oplus}$ $\sqrt{\text{Rz} \oplus}$ $\sqrt{+0.2 -0.2}$

DE: X	EN: X	ES: X	IT: X	PR: X	FR: X	RO: X	Material: 1.1193 S45C JISG 4051	Material: 10005649
new	INITIAL RELEASE	-	-	-	-	-	Edge tolerances acc. to DIN ISO 13715	Environmental protection acc. to STAB-Spec. 10005649
old	-	-	-	-	-	-	Surface finish DIN EN ISO 1302	All dimensions are in mm
Field	-	-	-	-	-	-	Replaces:	Scale: (Original DIN A3) 2:1
Date/Name	09.05.2016	Höfer	-	-	-	-	company Zhan Shi	Dimensions without tolerances DIN ISO 2768 mK
Chg. No.	637788	0	-	-	-	-	Replaces:	We reserve all rights to this document, to any patents or patent registrations related hereto, and to the duplication, retransmission by third parties and misc. use. Any use of this document is not permitted without the written consent of STABILUS.
Rev.							Dat. 09.05.2016 Schilz A. (date / signature)	Document No.: 10151520
								Material No.: 097061

Ident. Doc.:

***** Druckdatum: 5/10/2016 / 2:48:41 PM ***** Ausdruck nicht massgeben *****

STABILUS

PISTON ROD