


All rights are reserved in accordance with ISO 16016.
Copying of this document and the use only with authorization.
Contravention commits to damage compensation.

Tolerances for dimensions without individual tolerance indications according to DIN ISO 2768-mH


above /	above /	above /	above /	above /
0.5	6	30	120	400
±0.1	±0.2	±0.3	±0.5	±0.8

ISO 1302	ISO 1302	ISO 1302	ISO 1302	ISO 1302
√	√	√	√	√
Rz 100	Rz 25	Rz 6.3	Rz 1	



A-A

比例 3 : 1

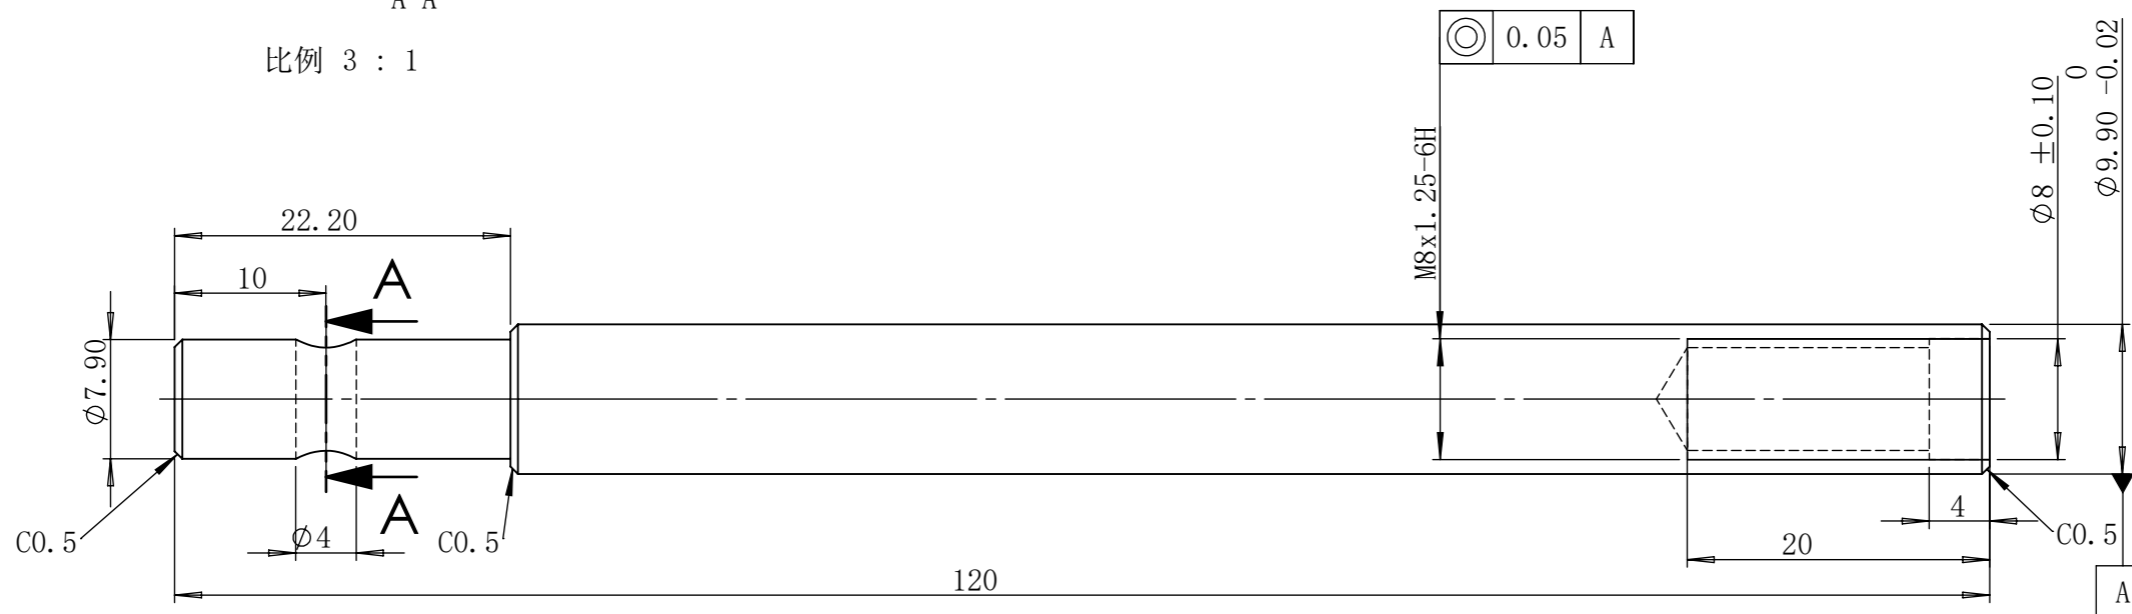

- 技术要求:
1. 未标注倒角C0.5
 2. 严格按照图纸公差加工, 否则一律退货
 3. 表面粗糙度严格按照图纸要求, 否则一律退货



更换:		材料: 40Cr		日期: 16 05 09	设计: 李龙凡	零件名称: 活塞杆拉杆 (16-4) M8	比例: 2: 1	执行标准(e)E ISO 128-30	页数: 共1页	零件号:	版本:	注释:
替换:		表面处理:		热处理: HRC 28		ISO 128-30		ISO 128-30		ISO 128-30		仅修改用CAD