

The print-out is not subject to the modification service.

Intended for internal and supplier use


EN

B


A

Ident. Doc.: L112


ⓐ piston rod processing per STAB-Spec. 10028959, table 1

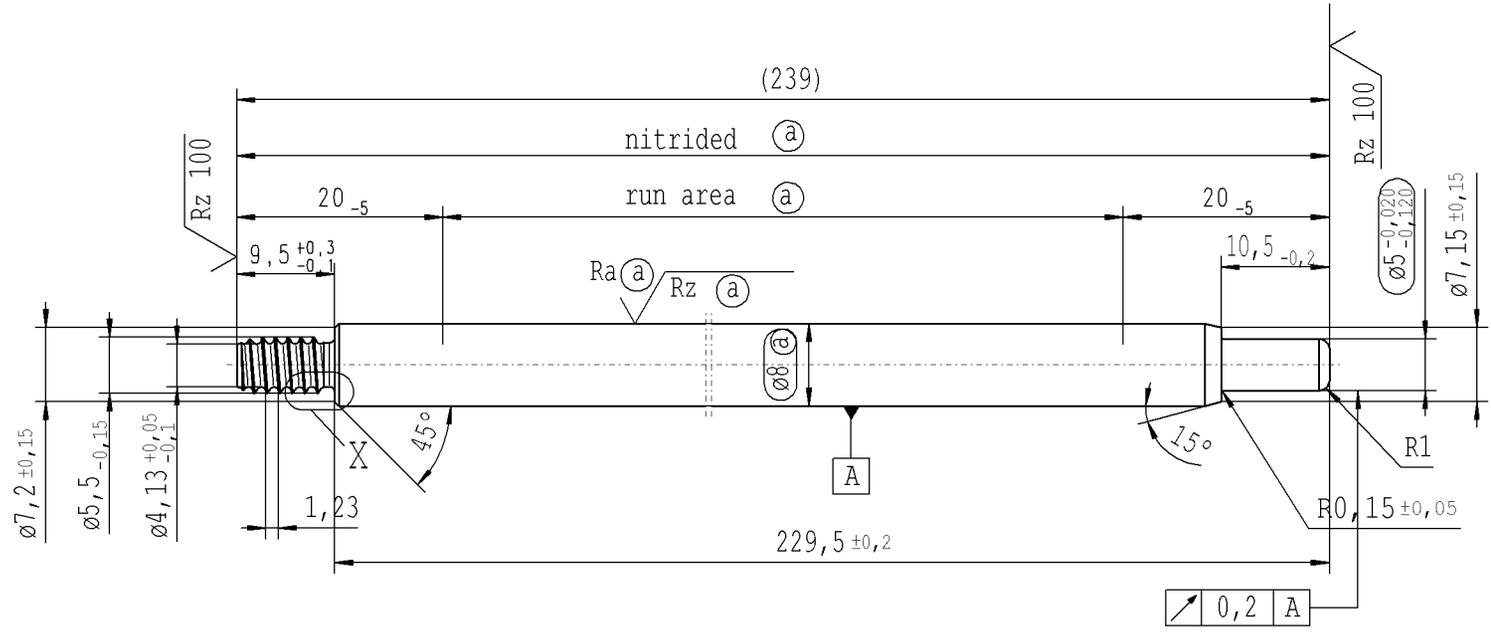

pre-worked:

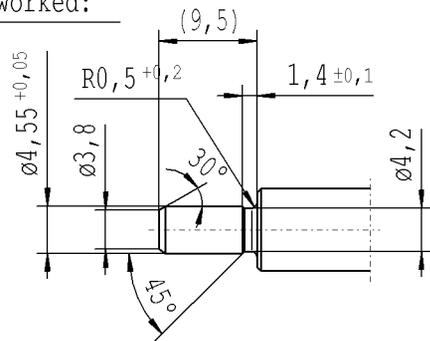

X 5:1

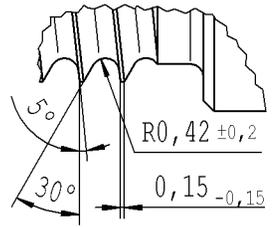

$\sqrt{Rz\ 25}$  (  $\sqrt{Rz\ 100}$   $Ra\ \textcircled{a}$   $Rz\ \textcircled{a}$  )  $\sqrt{+0,2}$   $\sqrt{-0,2}$

AIAG CQI-standards acc. to STAB-Spec. 10027692

Environmental protection acc. to STAB-Spec. 10005649

DE: X	EN: X	ES:	IT:	PR:	FR:	RO:
new	INITIAL RELEASE					
old	-					
Field	-					
Date/Name	29.03.2017 Jablonski					
Chg. No.	654824					
Rev.	0					

CRD created document; handwritten changes not permitted

**RELEASE**  
for supplier

company Zhang Shi

Dat. 29.03.2017 Schilz A.  
(date / signature)

Material:	1.1193 S45C JISG 4051
Edge tolerances acc. to DIN ISO 13715	
Surface finish	DIN EN ISO 1302
Replaces:	

All dimensions are in mm	Identification of important characteristics
Scale: (Original DIN A3) 2:1	Dimensions without tolerances DIN ISO 2768-mK
We reserve all rights to this document, to any patents or patent registrations related hereto, and to the duplication, retransmission by third parties and misc. use. Any use of this document is not permitted without the written consent of STABILUS.	
<b>STABILUS</b>	

Drawn by	Date	Name
Checked	29.03.2017	Jablonski
Document No.:	10151066	
Material No.:	368330	