


K77015-01-A

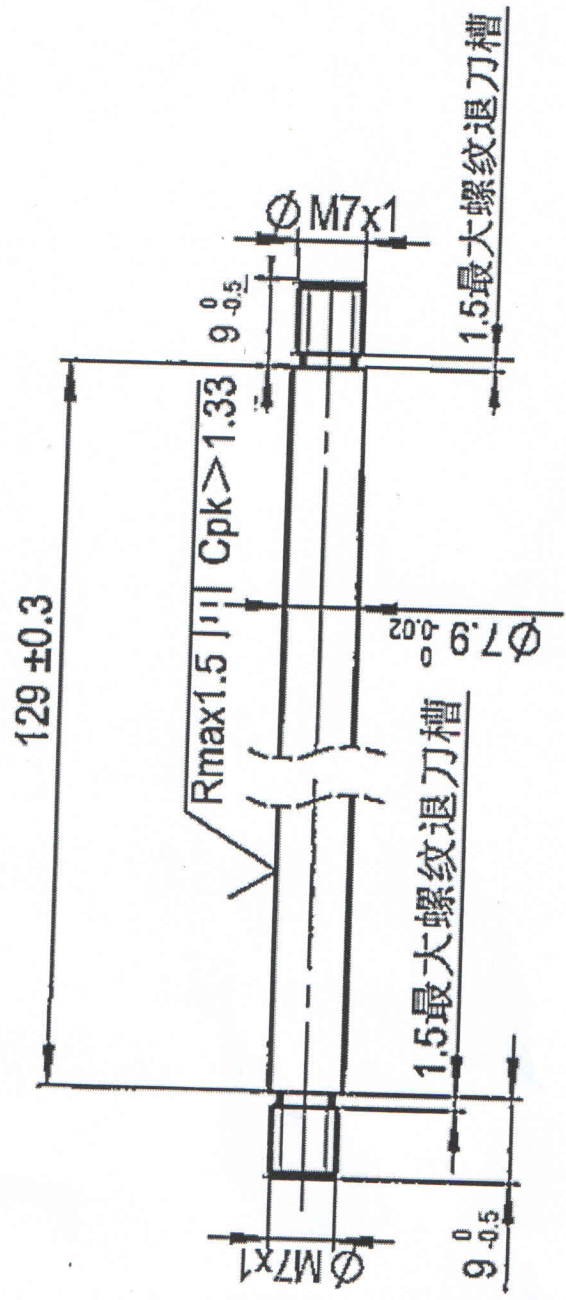

编制 4.8.20 9.8.1
审核 202.8.8.1
批准 202.8.8.1

技术要求:

1. 活塞杆表面黑色渗氮处理, 渗氮层厚度最小 12um, 硬度 HV0.05 >= 500, 要求满足 DIN 50021 SS 144 小时无锈蚀。
2. 未注尺寸公差按照 GB/T 1804-m 执行。

SUŠPA		Drawing Date: 18.07.2018		Drawing Date: 18.07.2018	
Drawing Name: 活塞杆		Drawing Name: 活塞杆		Drawing Name: 活塞杆	
Drawing Scale: 1:1		Drawing Scale: 1:1		Drawing Scale: 1:1	
Drawing Code: K77015-06		Drawing Code: K77015-06		Drawing Code: K77015-06	
Drawing Index: 00		Drawing Index: 00		Drawing Index: 00	