
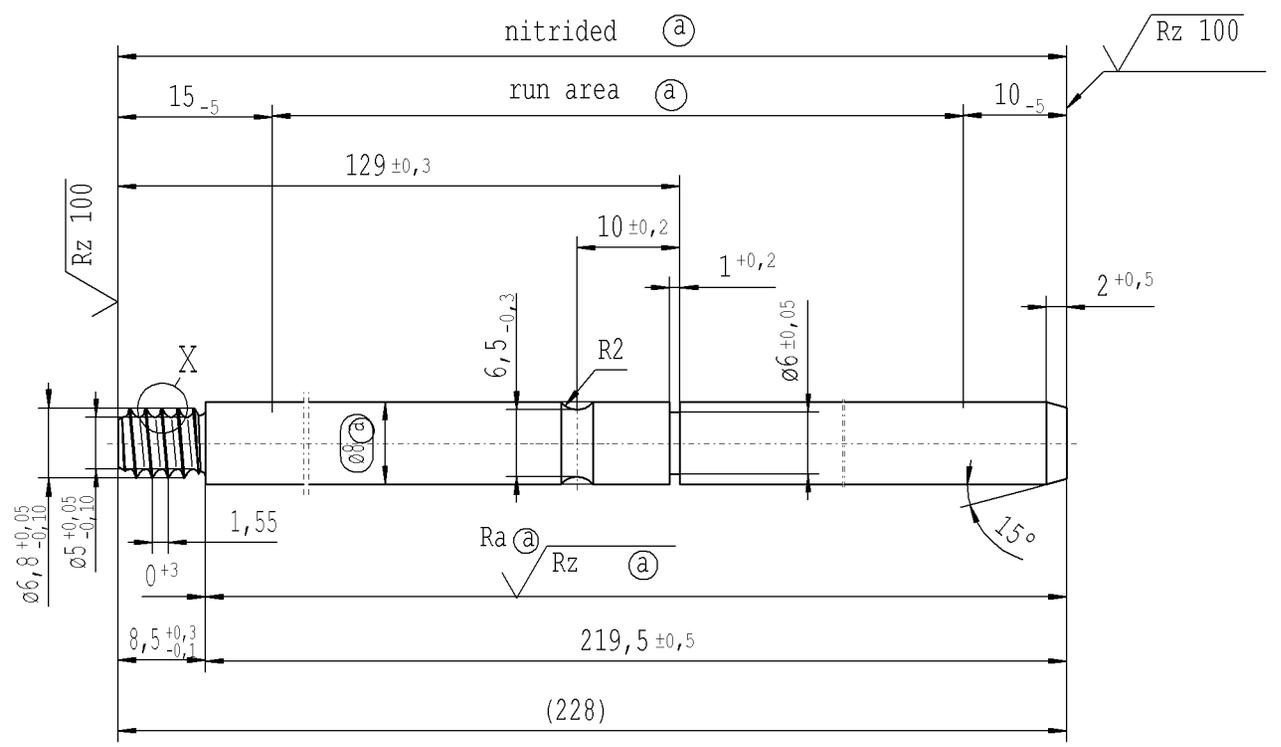
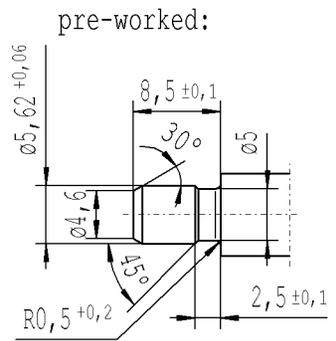


The print-out is not subject to the modification service.

Intended for internal and supplier use

Ident. Doc.: L02

ⓐ piston rod processing per STAB-Spec. 10028959, table 1

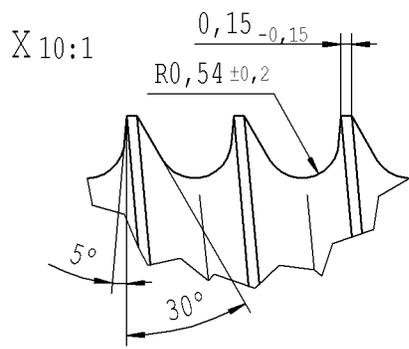

$\sqrt{Rz\ 25}$ ($\sqrt{Rz\ 100}$ $Ra\ \textcircled{a}$ $Rz\ \textcircled{a}$) $\begin{matrix} \swarrow +0,2 \\ \searrow -0,2 \end{matrix}$

AIAG CQI-standards acc. to STAB-Spec. 10027692

Environmental protection acc. to STAB-Spec. 10005649

DE: X	EN: X	ES:	IT:	PR:	FR:	RO:	CRD created document; handwritten changes not permitted
new	INITIAL RELEASE						
old	-						
Field	-						
Date/Name	12.06.2020 Höfer						
Chg. No.	689162						
Rev.	0						

RELEASE
for supplier

company Zhang Shi

Dat. 12.06.2020 Pomin H.
(date / signature)

Material: 1.1193
S45C JISG 4051

Edge tolerances acc. to DIN ISO 13715

Surface finish DIN EN ISO 1302

Replaces:

STABILUS

All dimensions are in mm

Scale: (Original DIN A3) **2:1**

Dimensions without tolerances DIN ISO 2768-mK

We reserve all rights to this document, to any patents or patent registrations related hereto, and to the duplication, retransmission by third parties and misc. use. Any use of this document is not permitted without the written consent of STABILUS.

PISTON ROD

Marking of special characteristics according to STAB-Spec. 10270932	Date	Name
Drawn by	12.06.2020	Höfer
Checked	12.06.2020	Milles
Document No.:	10249121	
Material No.:	557393	