


Intended for internal and supplier use. The print-out is not subject to the modification service.

A B C D E F

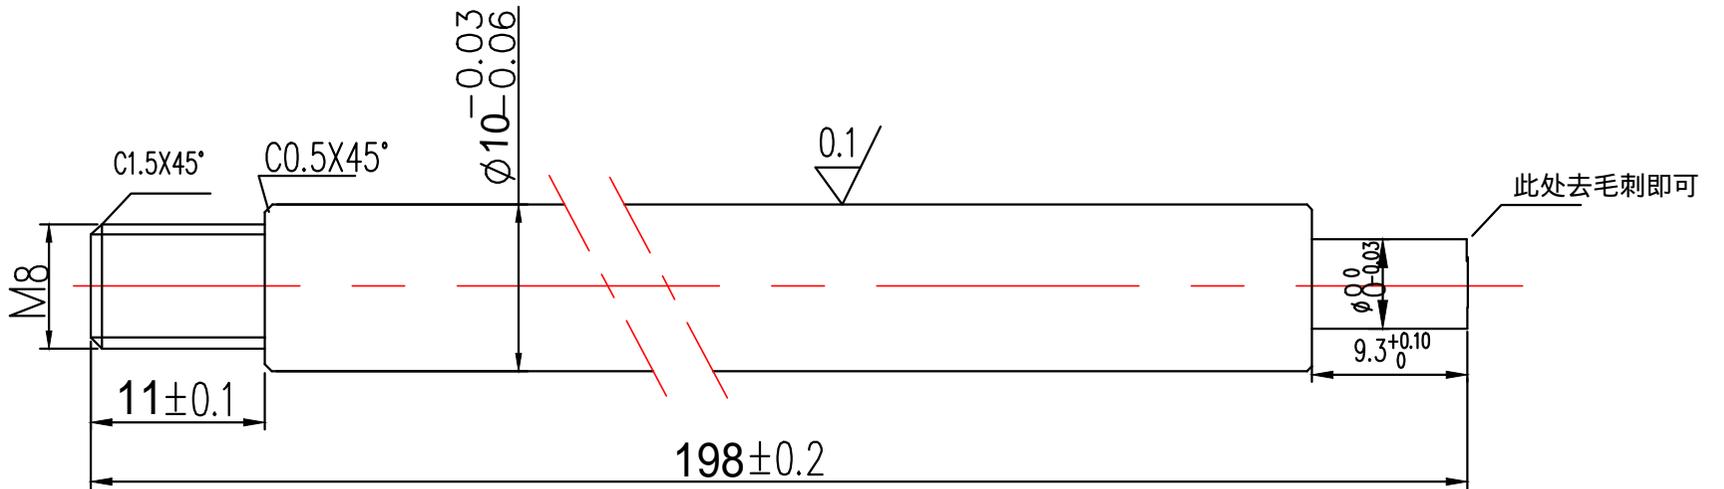


技术要求

1. 未注倒角处均为C0.3x45°;
2. 活塞杆表面QPQ处理; 表面光洁, 无划伤, 色泽均匀, 无明显的花斑, 附着沉淀物;
3. 盐雾试验不低于144h, 粗糙度Ra<0.1;
4. 硬度430HV-0.1min

EN

|           |           |     |     |     |     |     |                                       |                                 |   |  |            |      |
|-----------|-----------|-----|-----|-----|-----|-----|---------------------------------------|---------------------------------|---|--|------------|------|
| DE:       | EN: ✓     | ES: | IT: | PT: | FR: | RO: | Material:<br>material No. S45C        | All dimensions are in mm        | Identification of<br>important characteristics  | Drawn by   | Date       | Name |
| New       | shang hai |     |     |     |     |     | Edge tolerances acc. to DIN ISO 13715 | Scale:<br>(Original DIN A4) 1:1 | Dimensions without tolerance<br>DIN ISO 2768-mk | Checked  | 2014.08.26 | Amy  |
| Old       | --        |     |     |     |     |     | Surface finish acc. to DIN ISO 1302   |                                 |   | 2013.4.08.26   | wancheng   |      |
| Field     | ----      |     |     |     |     |     | Replaces:                             |                                 |   | <b>江苏精达</b><br><b>伸杆10-198</b><br>Material No.:<br>--- |            |      |
| Date/Name |           |     |     |     |     |     | Change No. --                         |                                 |   |  |            |      |
| Change No | ----      |     |     |     |     |     |                                       |                                 |   |  |            |      |
| Revision  |           |     |     |     |     |     |                                       |                                 |   |  |            |      |



PISTON ROD