


Intended for internal and supplier use. The print-out is not subject to the modification service.

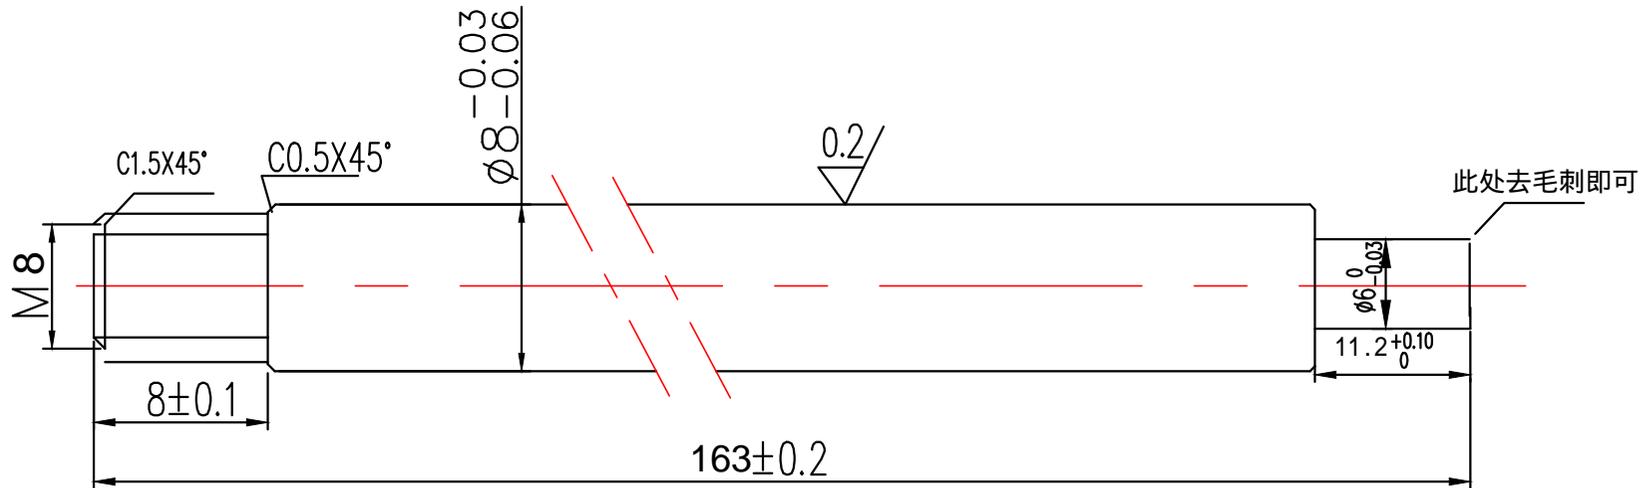

### 技术要求

1. 未注倒角处均为  $C0.3 \times 45^\circ$  ;
2. 活塞杆表面QPQ处理; 表面光洁, 无划伤, 色泽均匀, 无明显的花斑, 附着沉淀物;
3. 盐雾试验不低于144h, 粗糙度  $Ra < 0.1$  ;
4. 硬度  $430HV-0.1min$

DE:

N

C

F

Da

Char

Re

活塞杆8-163

江苏精达

Material No.:

---