


The print-out is not subject to the modification service.

Intended for internal and supplier use

Ident. Doc.: 5/18/2020 - 12:13

supp	material no.			A	B	E
No.	processing and surface treatment acc. to STAB-Spec. 10006248 Tab. IV 10006248 Tab. X 10028959 Tab. I			overall length	thread length	length without end-fitting stud
	(a) version 1	(a) version 1	(b) version 2	378.0	9	369

4	3	2	1
---	---	---	---

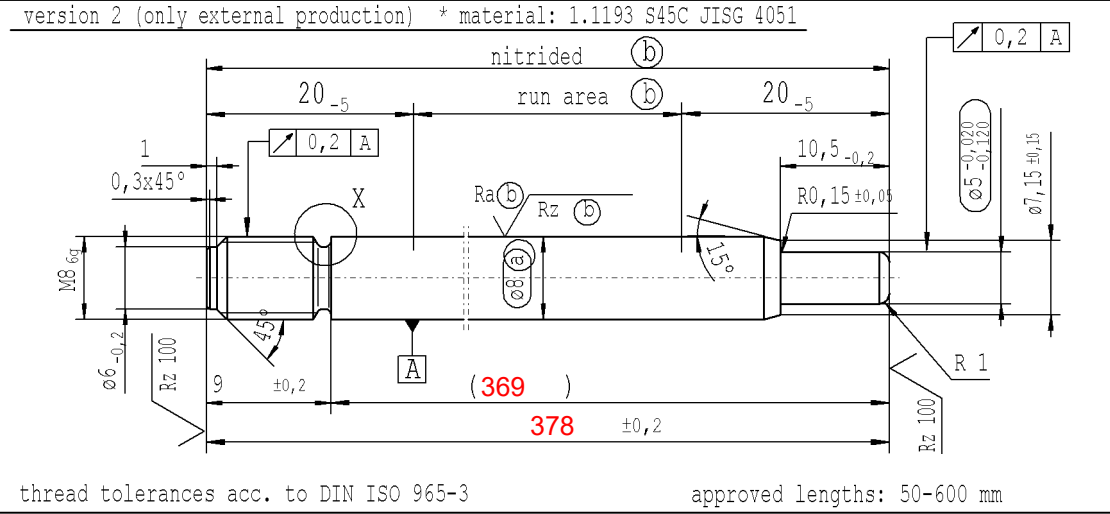

thread tolerances acc. to DIN ISO 965-3 approved lengths: 50-600 mm

sheet 1 of 2

AIAG CQI-standards acc. to STAB-Spec. 10027692							Environmental protection acc. to STAB-Spec. 10005649				
DE: X	EN: X	ES:	IT:	PR:	FR:	RO: X	Material:	All dimensions are in mm	Marking of special characteristics according to STAB-Spec. 10270932	Date	Name
new	approved lengths: 90-600 mm	⊙ = acc. STAB-Spec. 10258370	new format Internal/Supplier	*				Scale: (Original DIN A3) 2:1	Dimensions without tolerances DIN ISO 2768-mK	17.01.2008	Höfer
old	approved lengths: 90-400 mm	⊙ = RHT 0,4 0,7 mm	Supplier drawing separately				Edge tolerances acc. to DIN ISO 13715			15.07.2020	Klinkner
Field	D/4-5	B 4-5					Surface finish DIN EN ISO 1302	We reserve all rights to this document, to any patents or patent registrations related hereto, and to the duplication, retransmission by third parties and misc. use. Any use of this document is not permitted without the written consent of STABILUS.			Document No.: 10152007
Date/Name	24.11.2015 Hein	15.05.2019 Donat	14.07.2020 Höfer				Replaces:	Material No.:			
Chg. No.	630576	678703	690131				STABILUS	PISTON ROD			
Rev.	6	6	7								