



The print-out is not subject to the modification service.

Intended for internal and supplier use

Ident. Doc.: 5/18/2020 - 12:13

supp	material no.			A	B	E
No.	processing and surface treatment acc. to STAB-Spec. 10006248 Tab. IV 10006248 Tab. X 10028959 Tab. I			overall length	thread length	length without end-fitting stud
	(a) version 1	(a) version 1	(b) version 2	372.0	9	363

version 2 (only external production) * material: 1.1193 S45C JISG 4051

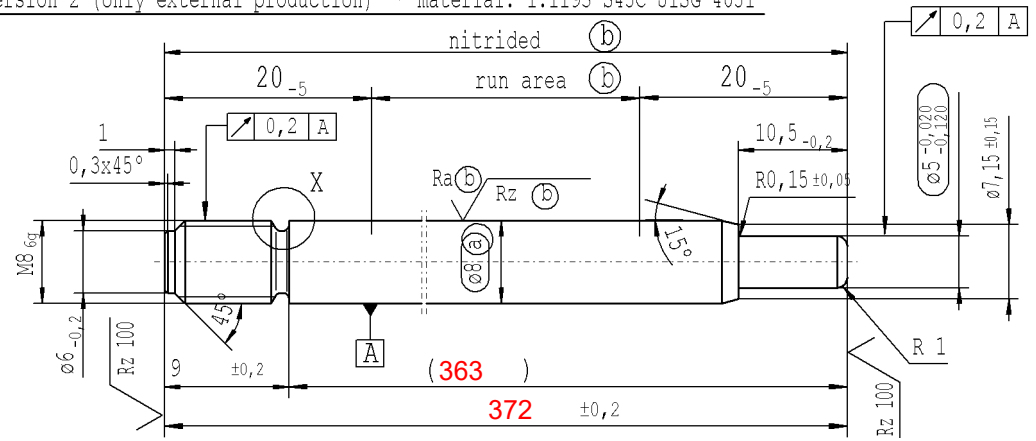

thread tolerances acc. to DIN ISO 965-3 approved lengths: 50-600 mm

$\sqrt{Rz\ 25}$ ($\sqrt{Rz\ 100}$ $\sqrt{R_{max}}$ (a) \sqrt{Ra} (b) \sqrt{Rz} (b)) $\begin{matrix} +0,2 \\ -0,2 \end{matrix}$

sheet 1
of 2

AIAG CQI-standards acc. to STAB-Spec. 10027692							Environmental protection acc. to STAB-Spec. 10005649					
DE: X	EN: X	ES:	IT:	PR:	FR:	RO: X	Material: *	All dimensions are in mm	<input type="checkbox"/> Marking of special characteristics according to STAB-Spec. 10270932 <input type="checkbox"/> Dimensions without tolerances DIN ISO 2768-mK	Drawn by	Date	Name
new	approved lengths: 90-600 mm	© = acc. STAB-Spec. 10258370		new format Internal/Supplier						17.01.2008	Höfer	
old	approved lengths: 90-400 mm	© = RHT 0,4 0,7 mm		Supplier drawing separately			15.07.2020	Klinkner				
Field	D/4-5		B 4-5		-			We reserve all rights to this document, to any patents or patent registrations related hereto, and to the duplication, retransmission by third parties and misc. use. Any use of this document is not permitted without the written consent of STABILUS.		Document No.: 10152007		
Date/Name	24.11.2015 Hein		15.05.2019 Donat		14.07.2020 Höfer			Material No.:				
Chg. No.	630576		678703		690131			STABILUS		PISTON ROD		
Rev.	6		6		7							