


Intended for internal and supplier use. The print-out is not subject to the modification service.

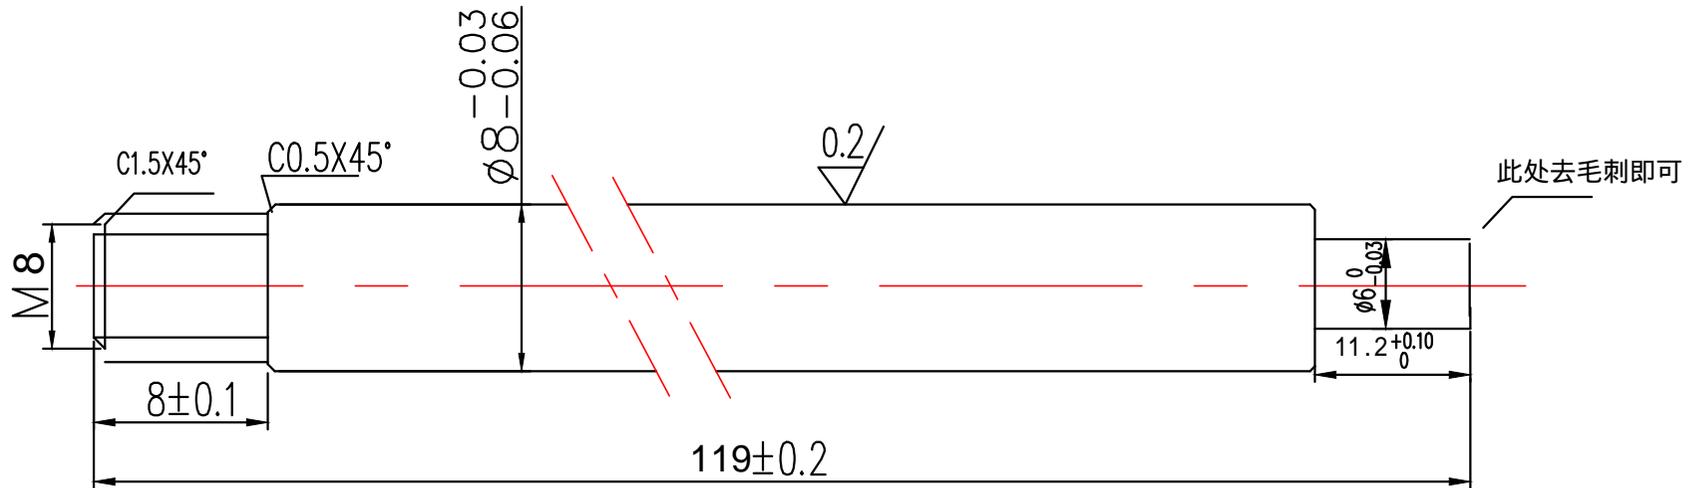

### 技术要求

1. 未注倒角处均为C0.3x45°;
2. 活塞杆表面QPQ处理; 表面光洁, 无划伤, 色泽均匀, 无明显的花斑, 附着沉淀物;
3. 盐雾试验不低于144h, 粗糙度Ra<0.1;
4. 硬度430HV-0.1min

DE:			
N			
C			
F			
Da			
Char			
Re			
		<b>活塞杆8-119</b>	<b>江苏精达</b>
			Material No.: ---