




The print-out is not subject to the modification service.

Intended for internal and supplier use

EN

Ident. Doc.: ERP011.dwg; 26/10/2020 - 8:26

supp. No.	material no.			A overall length	B thread length	E length without end-fitting stud
	processing and surface treatment acc. to STAB-Spec.					
	10006248 Tab. IV (a) version 1	10006248 Tab. X (a) version 1	10028959 Tab. I (b) version 2			
21	255054	255054	255054	303.0	9	294.0
22	183594	183594	183594	237.0	10	227.0
23	235457	235457	235457	234.0	9	225.0
24	436695	436695	436695	234.0	10	224.0
25	977076	977076	977076	294.0	9	285.0
26	899641	899641	899641	339.0	9	330.0
27	036613	036613	036613	333.0	9	324.0
28	261512	261512	261512	270.0	9	261.0
29	417101	417101	417101	270.0	11	259.0
30	559306	559306	559306	246.0	9	237.0
31	649887	649887	649887	240.0	9	231.0

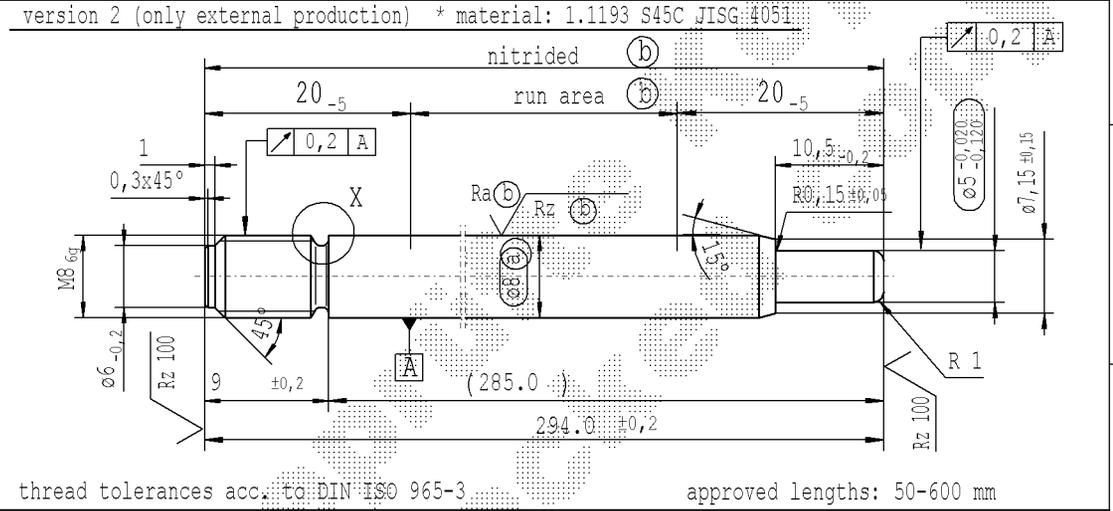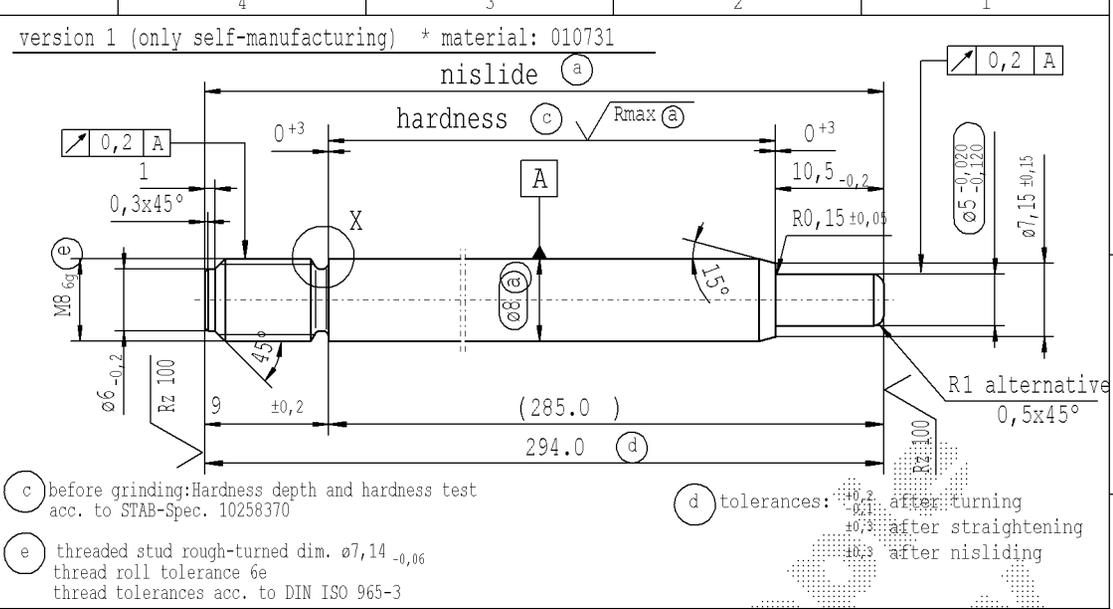

thread tolerances acc. to DIN ISO 965-3 approved lengths: 50-600 mm

$\sqrt{Rz 25}$  ( $\sqrt{Rz 100}$   $\sqrt{R_{max}}$  (a)  $\sqrt{Ra}$  (b)  $\sqrt{Rz}$  (b))  $\pm 0,2$   $\pm 0,2$

sheet 2 of 2

DE: X				EN: X		ES:		IT:		PR:		FR:		RO: X		CAD created document handwritten changes not permitted				Material: *		All dimensions are in mm		Marking of special characteristics according to STAB-Spec. 10270932		Date: 17.01.2008		Name: Höfer	
new				approved lengths: 90-600 mm		⊙ = acc. STAB-Spec. 10258370		new format Internal/Supplier												Scale: (Original DIN A3) 2:1		Dimensions without tolerances DIN ISO 2768-mK		Checked: 15.07.2020		Klinkner			
old				approved lengths: 90-400 mm		⊙ = RHT 0,4 .... 0,7 mm		Supplier drawing separately																					
Field				D/4-5		B 4-5																							
Date/Name				24.11.2015 Hein		15.05.2019 Donat		14.07.2020 Höfer																					
Chg. No.				630576		678703		690131																					
Rev.				6		6		7																					

**STABILUS**

PISTON ROD

Document No.: 10152007