

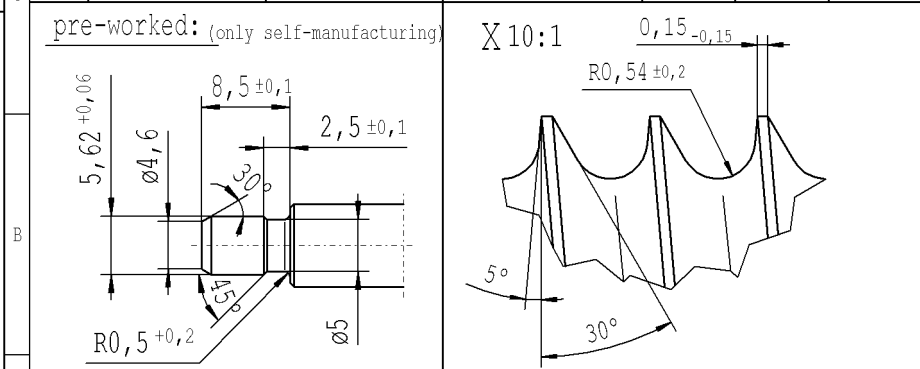
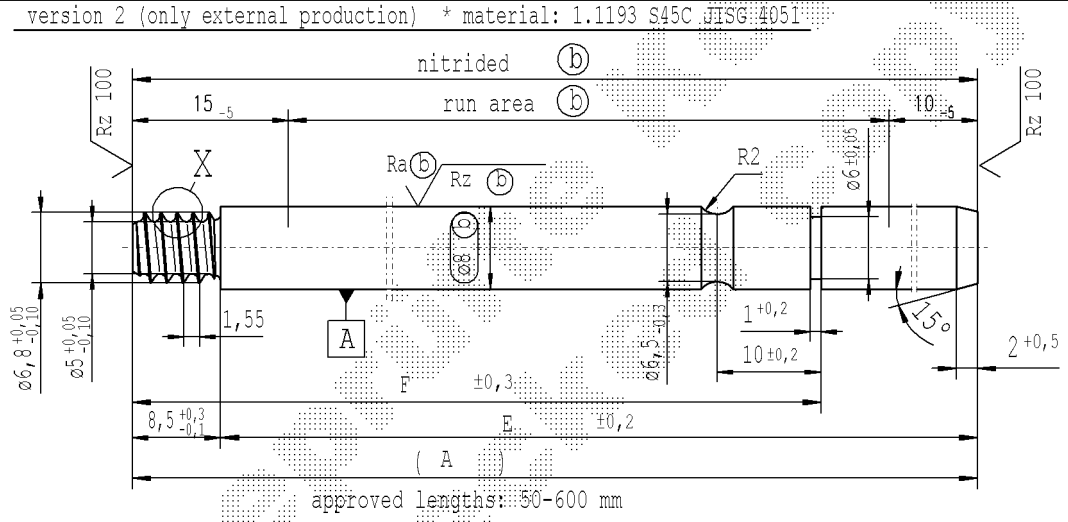


The print-out is not subject to the modification service.

Intended for internal and supplier use

Ident. Doc.: 5/18/2020 - 11:58

supp No.	material no.			A	E	F
	processing and surface treatment acc. to STAB-Spec.			overall length	length without endfitting stud	length to groove end
	10006248 Tab. IV version 1	10006248 Tab. X version 1	10028959 Tab. I version 2			
1		606615	606615	235	226.5	132
2		557393	557393	228	219.5	129
		STCN8*377	STCN8*377	377	368.5	214

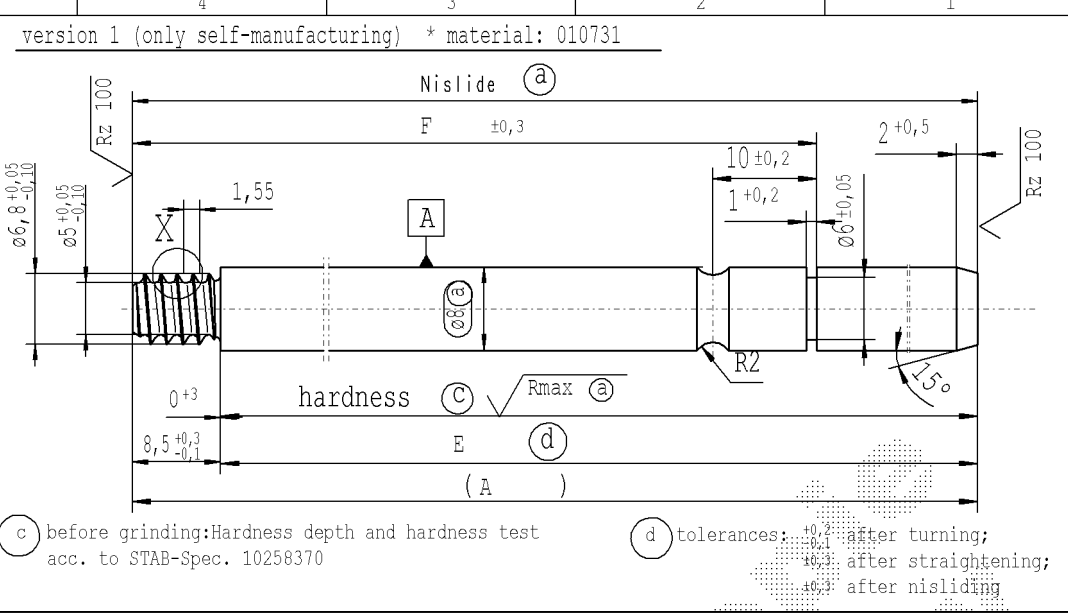

sheet 1 of 1

DE: X				EN: X				ES: IT: PR: FR: RO: X				Material: *				Environmental protection acc. to STAB-Spec. 10005649							
new position of angle 5° corrected; 8,5 $\pm 0,1$				CRD created document; handwritten changes not permitted				© = acc. STAB-Spec. 10258370				All dimensions are in mm				Marking of special characteristics according to STAB-Spec. 10270932							
old wrong position of angle 5°; (8,5)				© = RHT 0,4 ... 0,7 mm				2019/0882				Surface finish: DIN EN ISO 1302				Scale: (Original DIN A3) 2:1				Dimensions without tolerances DIN ISO 2768-mK			
Field B-C/1-3; D/4				B8				B6				Edge tolerances acc. to DIN ISO 13715				We reserve all rights to this document, to any patents or patent registrations related hereto, and to the duplication, retransmission by third parties and misc. use. Any use of this document is not permitted without the written consent of STABILUS.				Document No.: 10249121			
Date/Name 15.03.2019 Hein				24.04.2019 Höfer				17.06.2020 Höfer				30.06.2020 Höfer				Material No.:							
Chg. No. 676120				678037				689162				689714				PISTON ROD							
Rev. 6				7				8				9				STABILUS							