



[illegible]


pre-worked: (only self-manufacturing)

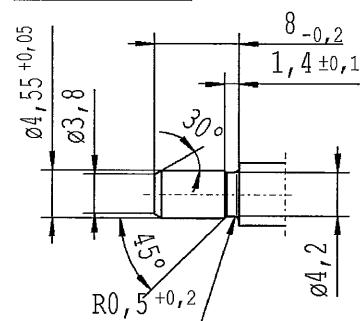


X 10:1

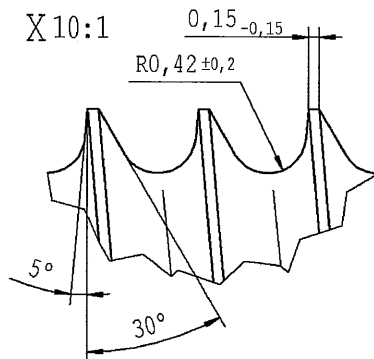

version 1 (only self-manufacturing) * material: 010707

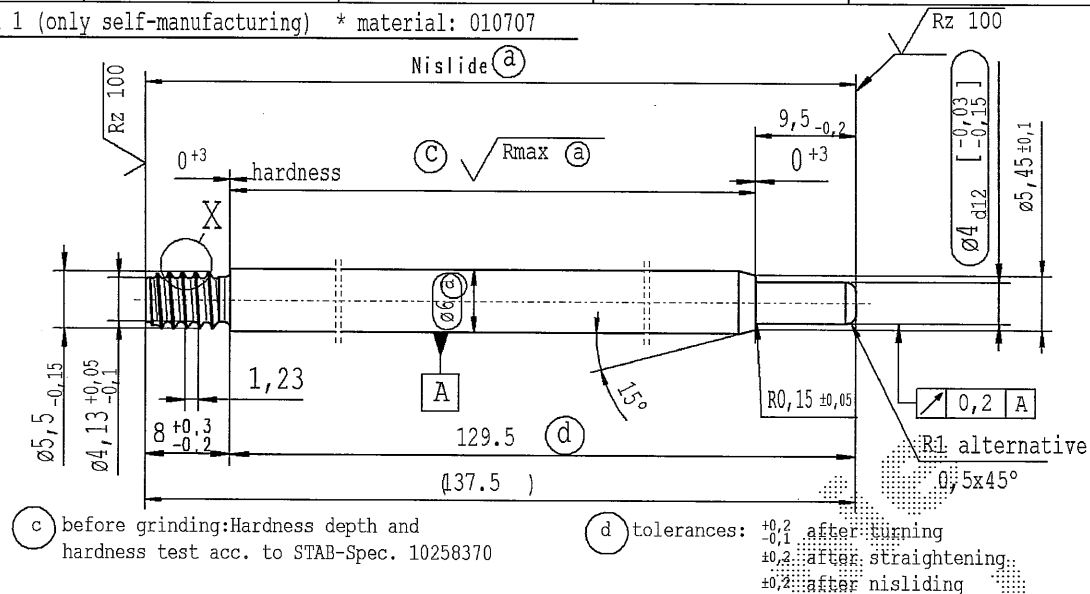

version 2 (only external production) * material: 1.1193 S45C JISG 4051.

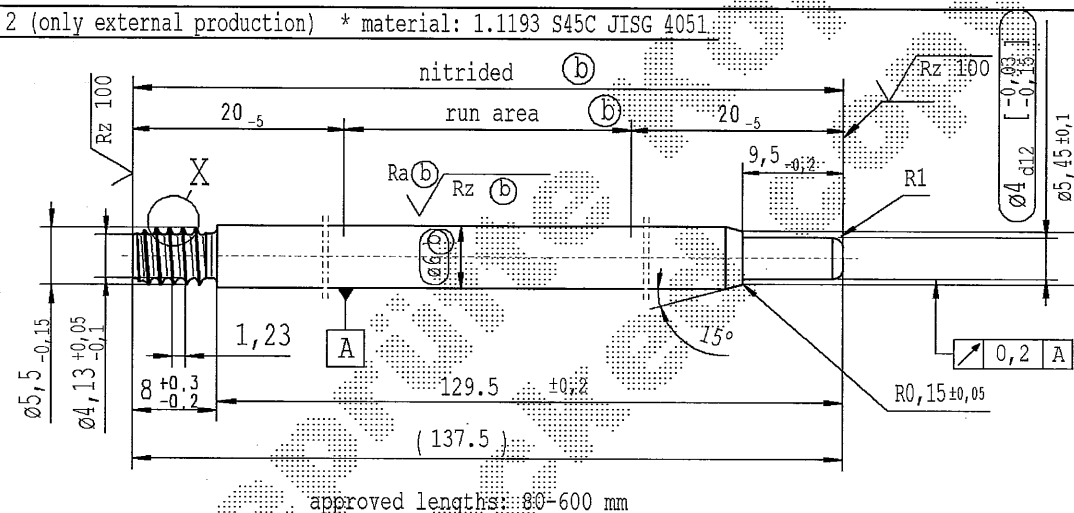

approved lengths: 80-600 mm

sheet 3
of 3

AIAG COI-standards acc. to STAB-Spec.: 10027692

Environmental protection acc. to STAB-Spec. 10005649

DE: X	EN: X	ES:	IT:	PR:	FR:	RO: X	CAD created document handwritten changes not permitted	
new	approved lengths: 80-600mm			ZhangShi		detail X reworked	☉ = acc. STAB-Spec. 10258370	new format International Supplier
old	approved lengths: 80-200mm			China		-	☉ = RHT 0,4 ... 0,7 mm	Supplier drawing separately
Field	B/3-4			C3/F7		E-F/4-5	B 4-5	-
Date/Name	24.11.2015 Hein			20.04.2017 Höfer		15.04.2019 Hein	15.05.2019 Jablonski	08.09.2020 Donat
Chg. No.	630576			655549		677388	678682	691199
Rev.	6			7		8	9	10

Material:

..*

Edge tolerances acc. to DIN ISO 1371

Surface: Elblich DYN EN ISO 1302

Periløst:

STABILUS

All dimensions are
in mm

	Marking of special characteristics according to STAB-Spec. 10270932
---	---

Scale:

0.1	Dimensions without tolerances
-----	-------------------------------

(Original DIN A3)	2:1	DIN ISO 2768-mK
We reserve all rights to this document, to any patents or patent registrations related hereto, and to the duplication, retransmission by third parties and misc. use. Any use of this document is not permitted without the written consent of STABILUS.		

	Date	Name
Drawn by	07.12.2007	Höfer
Checked	08.09.2020	Klinkner

Document No.: 10151336

Material No.:

PISTON ROD