
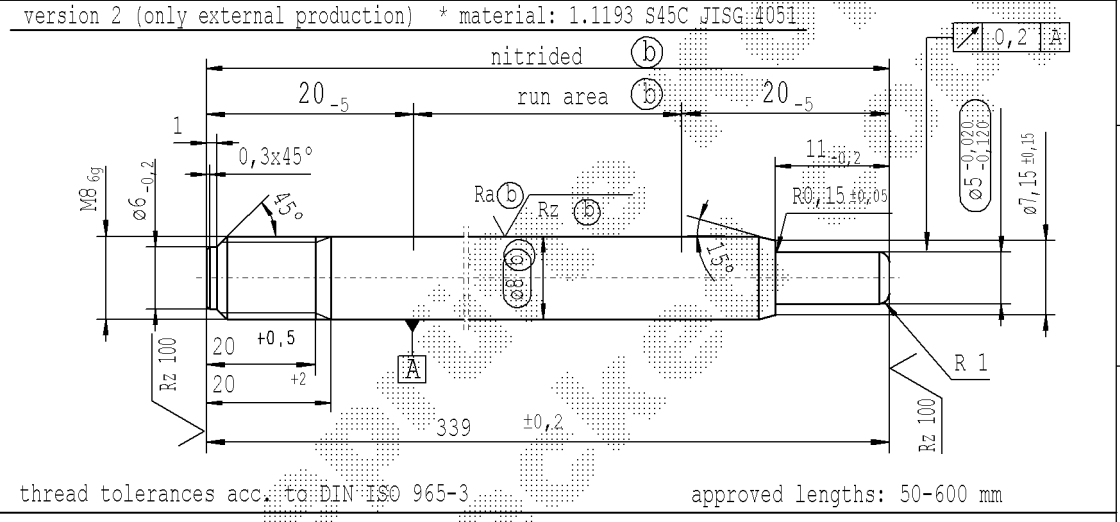


The print-out is not subject to the modification service.

Intended for internal and supplier use

Ident. Doc.: ERP011.docx; 25/11/2020 - 10:33

supp. No.	material no.			A overall length	B thread length
	processing and surface treatment acc. to STAB-Spec.				
	10006248 Tab. IV version 1	10006248 Tab. X version 1	10028959 Tab. I version 2		
1	837740	837740	837740	345	20
2	112855	112855	112855	339	20

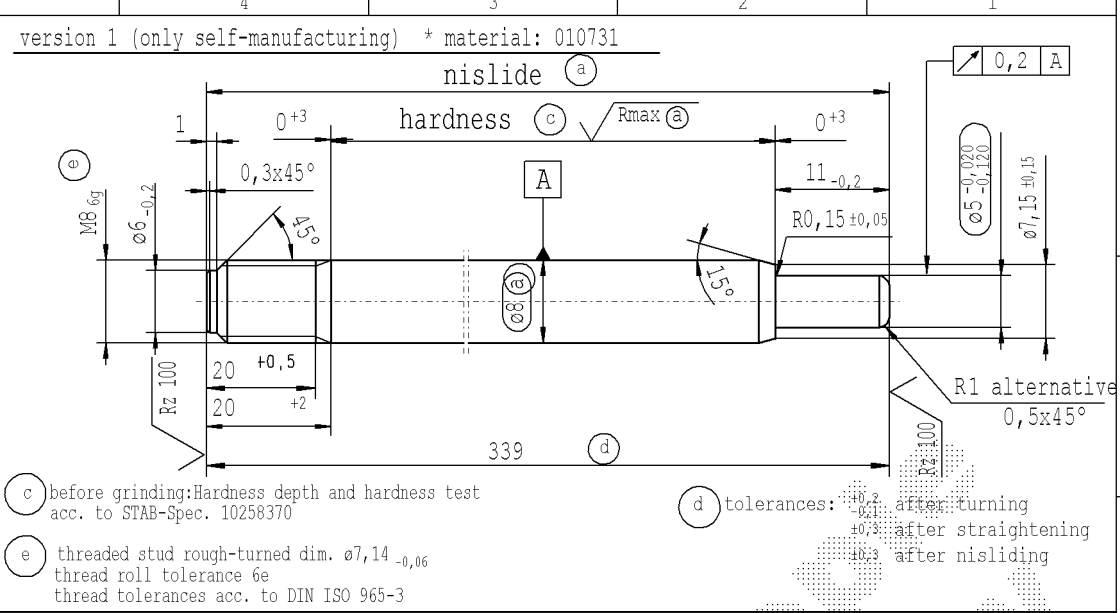

$\sqrt{Rz 25}$ ($\sqrt{Rz 100}$ \sqrt{Rmax} (a) \sqrt{Ra} (b) \sqrt{Rz} (b)) $\pm 0,2$ $\pm 0,2$

sheet 1 of 1

AIAG CQI-standards acc. to STAB-Spec. 10027692										Environmental protection acc. to STAB-Spec. 10005649														
DE: X	EN: X	ES:	IT:	PR:	FR:	RO: X	CAD created document handwritten changes not permitted			Material: *					All dimensions are in mm					Marking of special characteristics according to STAB-Spec. 10270932				
new	Initial Release									Edge tolerances acc. to DIN ISO 13715					Scale: (Original DIN A3) 2:1					Dimensions without tolerances DIN ISO 2768-mK				
old	-									Surface finish acc. to DIN EN ISO 1302					We reserve all rights to this document, to any patents or patent registrations related hereto, and to the duplication, retransmission by third parties and misc. use. Any use of this document is not permitted without the written consent of STABILUS.					Document No.: 10279637				
Field	-									Regulations:					PISTON ROD					Material No.:				
Date/Name	03.07.2020 Höfer									STABILUS														
Chg. No.	-																							
Rev.	0																							