

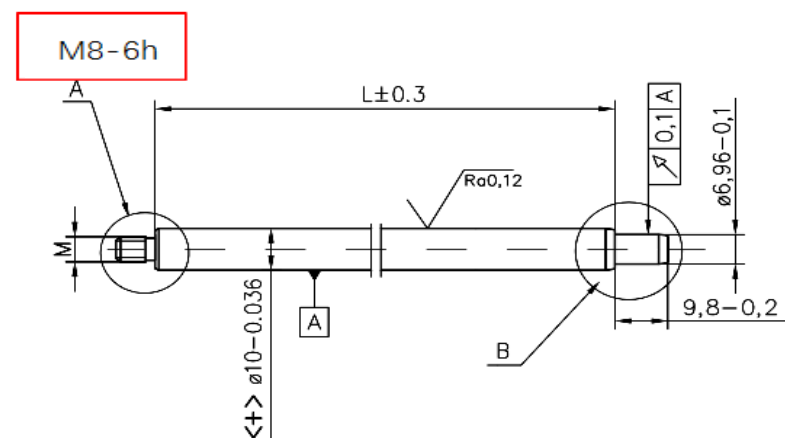


DATA	REW	ZM	OPIS ZMIANY	NR ZMIANY	WYK	ZATW
10.12.2020	01		tylko dla oferty			TK

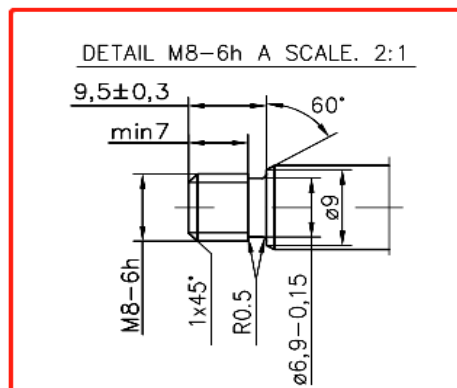

DETAIL B SCALE. 2:1

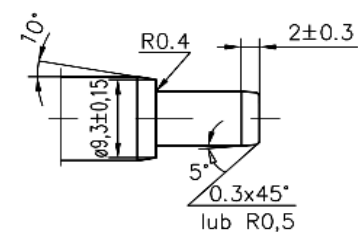

REMARKS:

<+>1. IN LENGTH L IS UNACCEPTABLE DEFECTS FACES OF

2. STRAIGHTNESS MAX. 0,1mm ALL ALONG FOR L<120mm.
AND MAX 0,1 IN LENGTH 100mm FOR L>=120mm.

3. PISTON ROD:

- nitrated a. oxidized
- Compound layer: to supplier standard
- Layer hardness: to supplier standard
- Corrosion resistance 120h acc. ISO 9227 NSS. (no corrosion)
- Color: brown-black

SYMBOL	Ilość charakterystyk
SYMBOL	No characteristic
<DP>	—
<DC>	—
<D>	—
<C+>	—
<+>	2

TOLENCJE WYMIARÓW METROLOGICZNYCH WŁ:

(ISO 2768 : 89)

PN-EN-22768:99-mK

MATERIAL:				ROUND STEEL Material grade C35E acc. to EN 10083-2		METODA RZUTOWANIA		  	
		IMIE I NAZWISKO		DATA		CHARAKT. SPECJALNE		NAZWA:	
WYKONAŁ		TOMASZ KLATKA		10.12.2020				Piston rod ø10	
ZATWIERDZIŁ				10.12.2020				ARK./ARK-Y	
FORMAT:		A2		MASA: ---- [kg]				1/1	
PODZIAŁKA:				FA Krosno		<+>		NR RYSUNKU:	
1:1								M27313	
								NR INDEKSU	
								acc. table	

mm 0 10 20 30 40

零件号PN	规格Size	全长	行程L	图纸号
M27570	10	183.8	164.5	M27313
M27580	10	242.8	223.5	M27313
M27337	10	122.8	103.5	M27313
M27177	10	397.8	378.5	M27313