
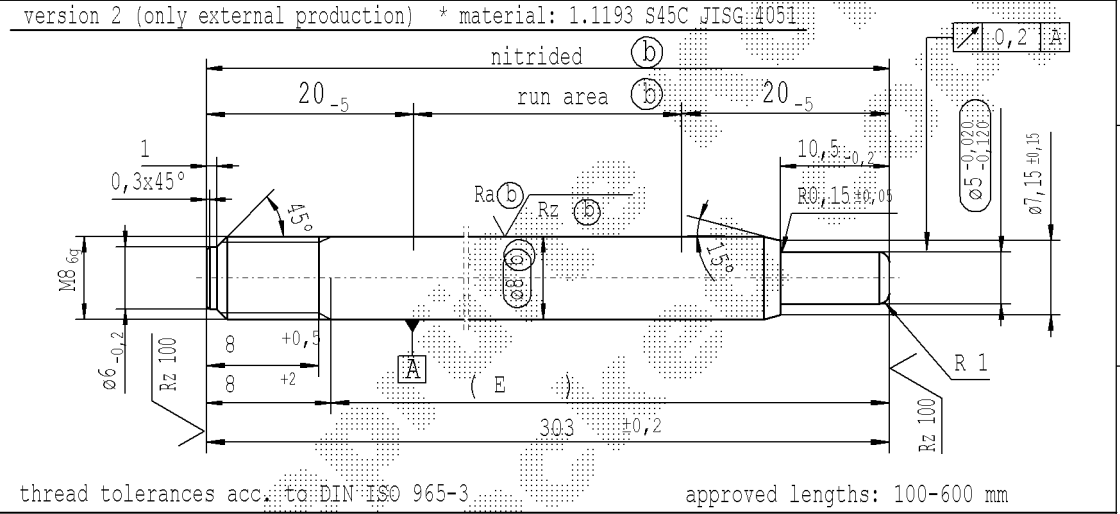


The print-out is not subject to the modification service.

Intended for internal and supplier use

Ident. Doc.: EN

supp. No.	material no.				A overall length	B thread length
	10006248 Tab. IV version 1	10006248 Tab. V version 1	10006248 Tab. X version 1	10028959 Tab. I version 2		
21	569346		569346	569346	276	10
22	701035		701035	701035	186	10
23	414714		414714	414714	303	8

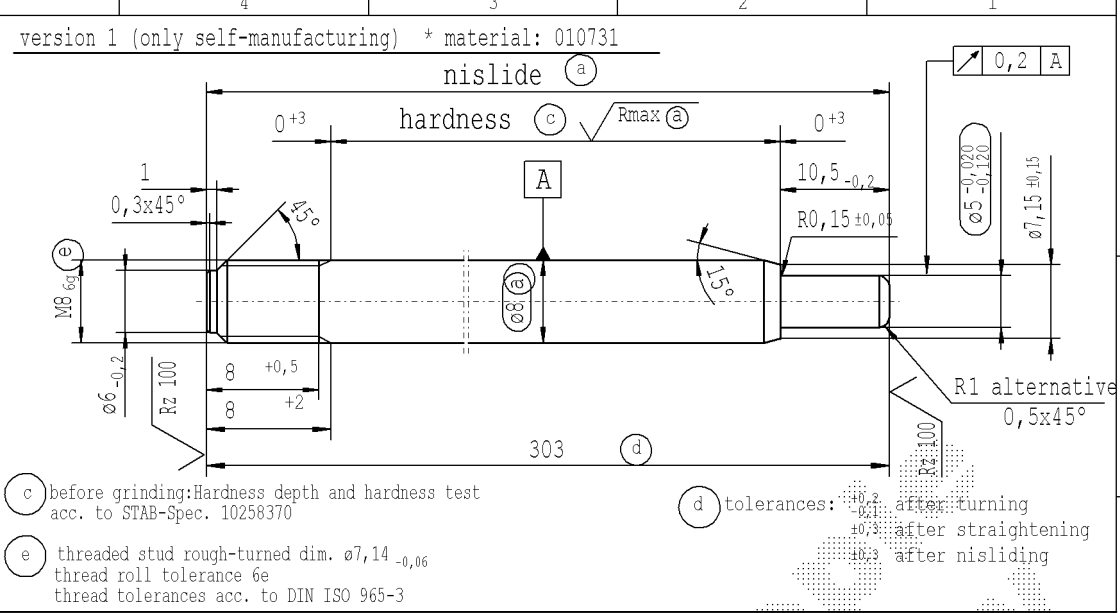

thread tolerances acc. to DIN ISO 965-3 approved lengths: 100-600 mm

$\sqrt{Rz 25}$ ($\sqrt{Rz 100}$ $\sqrt{R_{max}}$ (a) \sqrt{Ra} (b) \sqrt{Rz} (b)) $\pm 0,2$ $\pm 0,2$

sheet 2 of 2

AIAG CQI-standards acc. to STAB-Spec. 10027692						
DE: X	EN: X	ES:	IT:	PR:	FR:	RO: X
new	B			Tab. V		RO: X
old	10			-		-
Field	B,C/4 Tab.			Tab.		-
Date/Name	05.01.2016 Höfer	23.03.2016 Höfer	18.03.2019 Höfer	06.06.2019 Höfer	17.09.2020 Donat	
Chg. No.	632067	635757	678936	678546	691413	
Rev.	3	4	5	6	7	

Environmental protection acc. to STAB-Spec. 10005649

All dimensions are in mm

Scale: (Original DIN A3) 2:1

Marking of special characteristics according to STAB-Spec. 10270932

Dimensions without tolerances DIN ISO 2768-mK

Material: *
Edge tolerances acc. to DIN ISO 13715
Surface finish: DIN EN ISO 1302

Regulations:

We reserve all rights to this document, to any patents or patent registrations related hereto, and to the duplication, retransmission by third parties and misc. use. Any use of this document is not permitted without the written consent of STABILUS.

Document No.: 10210124

Material No.:

STABILUS PISTON ROD