
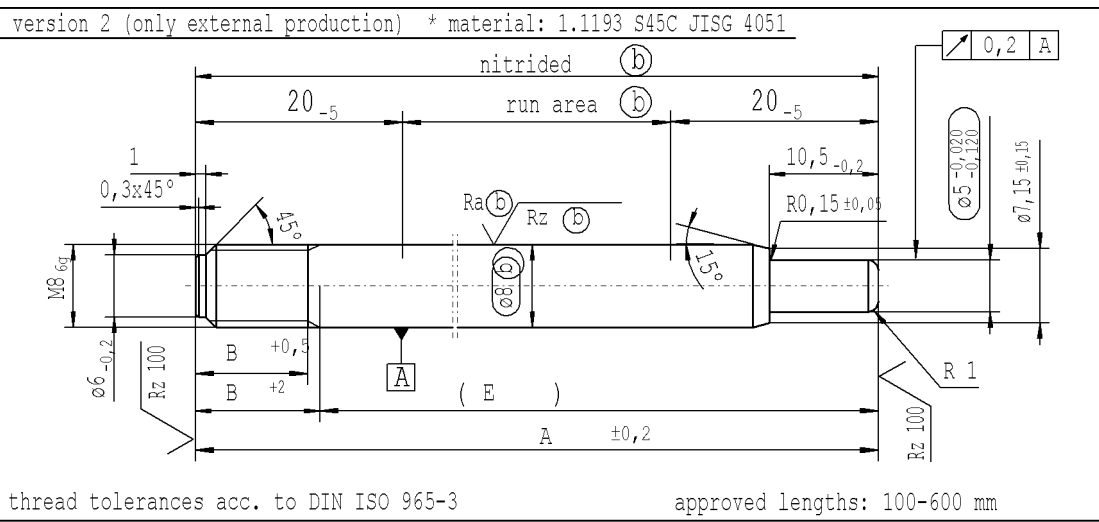


The print-out is not subject to the modification service.

Intended for internal and supplier use

Ident. Doc.: 19/07/2021 - 7:36

supp. No.	material no.				A	B
	processing and surface treatment acc. to STAB-Spec. 10006248 Tab. IV 10006248 Tab. V 10006248 Tab. X 10028959 Tab. I				overall length	thread length
	(a) version 1	(a) version 1	(a) version 1	(b) version 2		
21	569346		569346	569346	276	10
22	701035		701035	701035	186	10
23	414714		414714	414714	303	8
XX	XXXXXX		XXXXXX	XXXXXX	291	10

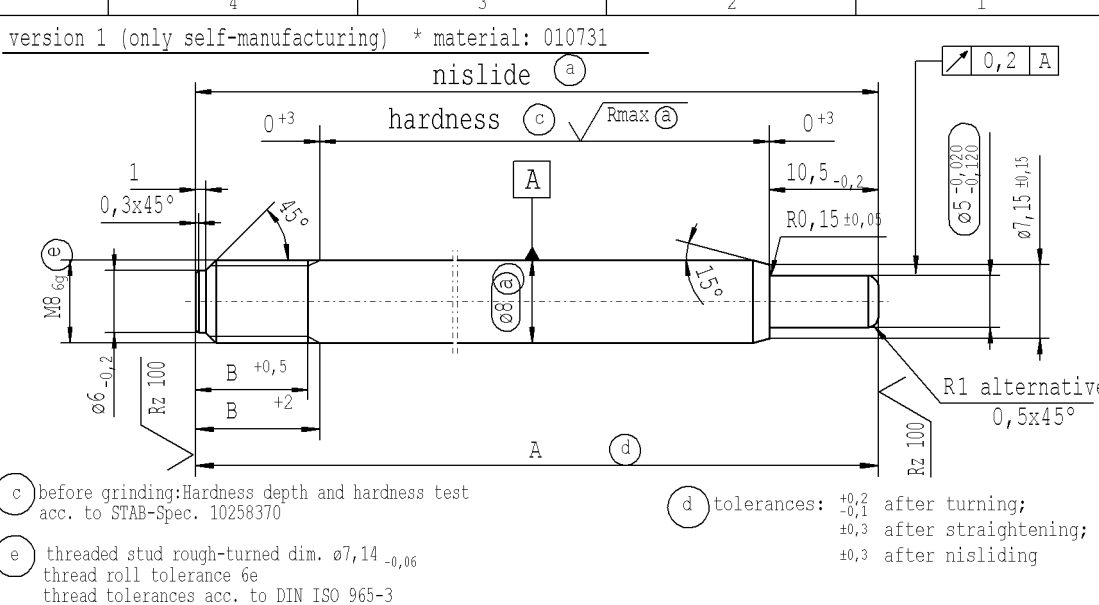

$\sqrt{Rz 25}$ ($\sqrt{Rz 100}$ $\sqrt{Rmax (a)}$ $\sqrt{Ra (b)}$ $\sqrt{Rz (b)}$) $\begin{matrix} +0,2 \\ -0,2 \end{matrix}$

sheet 2 of 2

AIAG CQI-standards acc. to STAB-Spec. 10027692					Environmental protection acc. to STAB-Spec. 10005649									
DE: X	EN: X	ES:	IT:	PR:	FR:	RO: X	CRD created document; handwritten changes not permitted			Material: *	All dimensions are in mm	Marking of special characteristics according to STAB-Spec. 10270932	Date	Name
new	B			Tab. V		RO: X	© = acc. STAB-Spec. 10258370	new format Internal/Supplier			Scale: (Original DIN A3) 2:1	Dimensions without tolerances DIN ISO 2768-mK	17.09.2020	Höfer
old	10			-		-	© = RHT 0,4 ... 0,7 mm	Supplier drawing separately					17.09.2020	Klinkner
Field	B,C/4; Tab.		Tab.		-		C8		-		We reserve all rights to this document, to any patents or patent registrations related hereto, and to the duplication, retransmission by third parties and misc. use. Any use of this document is not permitted without the written consent of STABILUS.			
Date/Name	05.01.2016 Höfer	23.03.2016 Höfer	18.03.2019 Höfer	06.06.2019 Höfer	17.09.2020 Donat	Document No.: 10210124								
Chg. No.	632067	635757	678546	691413	Material No.: 10210124									
Rev.	3	4	5	6	7	STABILUS			PISTON ROD					

