
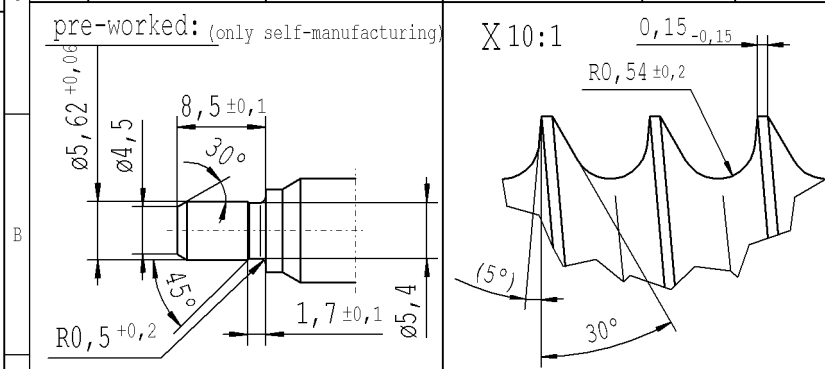
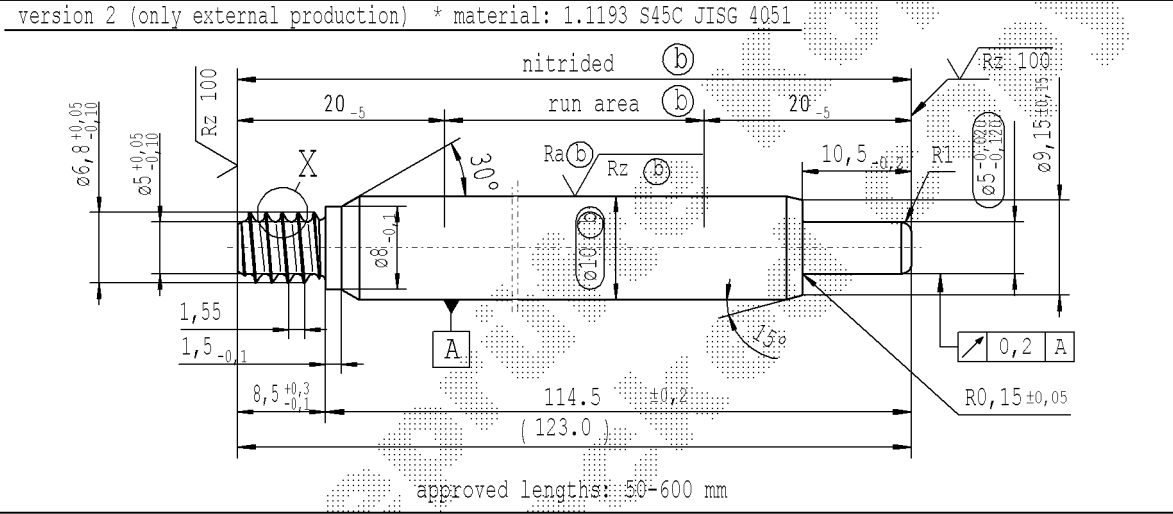


The print-out is not subject to the modification service.

Intended for internal and supplier use

Ident. Doc.:

F	supp No.	material no.			A	E
		processing and surface treatment acc. to STAB-Spec.				
		10006248 Tab. XVI optimized version 1	10006248 Tab. X version 1	10028959 Tab. I version 2		
104		264621	264621	387.0	378.5	
105	503860	503860	503860	295.5	287.0	
106	522741	522741	522741	363.0	354.5	
107	602806	602806	602806	369.0	360.5	
108	622405	622405	622405	123.0	114.5	
E	109	627185	627185	432.0	423.5	
	110	627663	627663	552.0	543.5	
	111	638418	638418	489.0	480.5	
	112	643198	643198	465.0	456.5	
	113	689086	689086	372.0	363.5	
	114	718244	718244	306.0	297.5	
	115	722068	722068	303.0	294.5	
D	116	722546	722546	558.0	549.5	
	117	733301	733301	480.0	471.5	
	118	734257	734257	345.0	336.5	
	119	742861	742861	468.0	459.5	
	120	743817	743817	393.0	384.5	
	121	786598	786598	555.0	546.5	
EN	122	799265	799265	390.0	381.5	

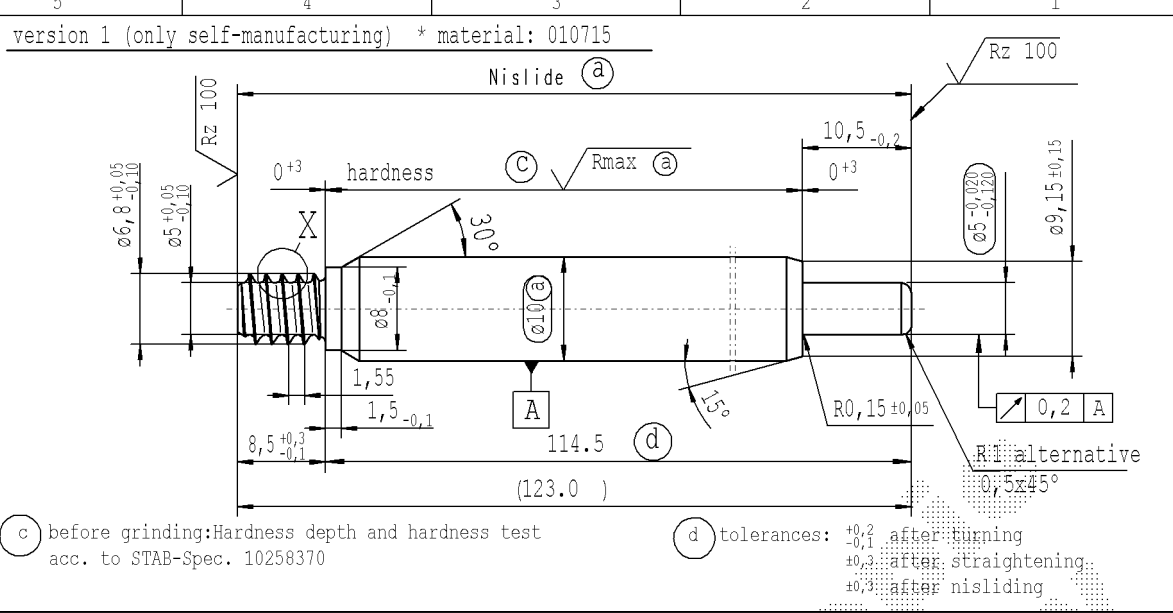

AIAG CQI-standards acc. to STAB-Spec. 10027692				Environmental protection acc. to STAB-Spec. 10005649			
DE: X	EN: X	ES:	IT:	PR:	FR:	RO: X	
new (5°) no technical change, no new first sample required			CAD created document handwritten changes not permitted				Material: *
old 5°			Tab XVI no technical change, no new first sample required				All dimensions are in mm
Field B/6-7			Tab IV				Scale: (Original DIN A3) 2:1
Date/Name 08.04.2021 Hein			12.08.2021 Donat				Marking of special characteristics according to STAB-Spec. 10270932
Chg. No. 696948			699704				Dimensions without tolerances DIN ISO 2768-mK
Rev. 13			13				Document No.: 10151520
STABILUS						PISTON ROD	

sheet 6 of 7