
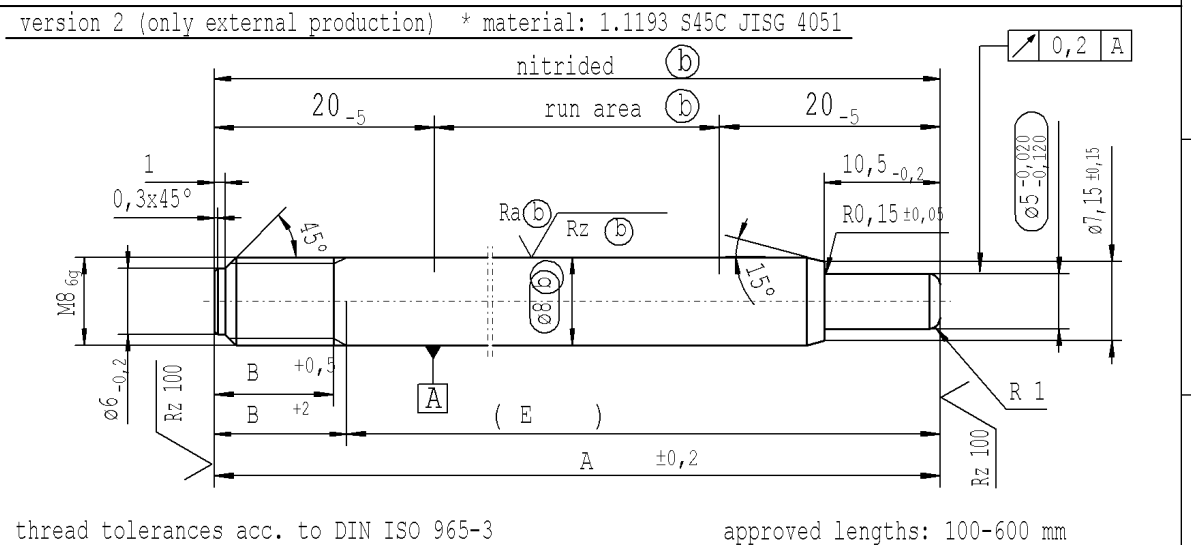


	8		7		6		
F	supp	material no.				A	B
	No.	processing and surface treatment acc. to STAB-Spec.				overall	thread
		10006248 Tab. XVI optimized	10006248 Tab. V	10006248 Tab. X	10028959 Tab. I	length	length
		(a) version 1	(a) version 1	(a) version 1	(b) version 2		
E	21	569346		569346	569346	276	10
	22	701035		701035	701035	186	10
	23	414714		414714	414714	303	8
D							
C							
B							

A								AIAG CQI-standards acc.		
DE: X	EN: X	ES:	IT:	PR:	FR:	RO: X	CAD created document; handwritten changes not			
new	© = acc. STAB-Spec. 10258370				new format Internal/Supplier		Tab XVI; no technical change, no new f			
old	© = RHT 0,4 0,7 mm				Supplier drawing separately		Tab IV;			
Field	C8				-		F 8			
Date/Name	06.06.2019 H8fer				17.09.2020 Donat		16.08.2021 Donat			
Chg. No.	678546				691413		699704			
Rev.	6				7		7			

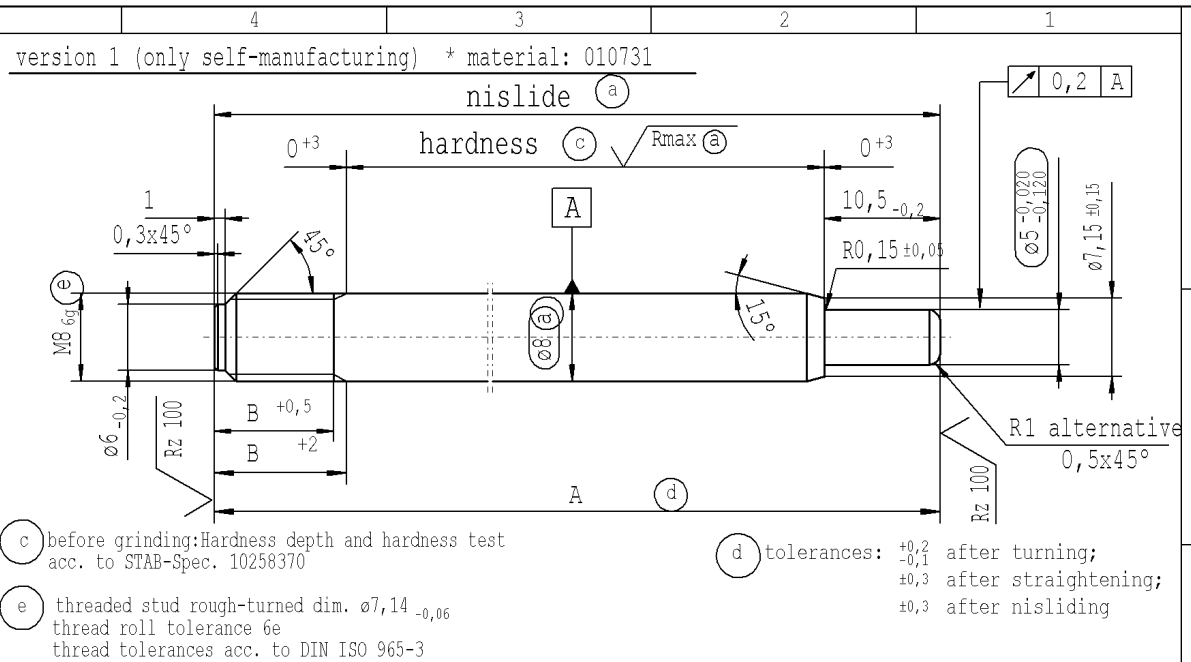

thread tolerances acc. to DIN ISO 965-3

approved lengths: 100-600 mm

$$\sqrt{R_z \ 25} \left(\sqrt{R_z \ 100} \sqrt{R_{\max} \textcircled{a}} \sqrt{R_z \textcircled{b}} \right) \begin{matrix} \swarrow +0,2 \\ \searrow -0,2 \end{matrix}$$

sheet 2
of 2

to STAB-Spec. 10027692		Environmental protection acc. to STAB-Spec. 10005649			
permitted	Material: ★	All dimensions are in mm	 Marking of special characteristics according to STAB-Spec. 10270932	Date	Name
sample required		Scale: (Original DIN A3) 2:1	Dimensions without tolerances DIN ISO 2768-mK	Drawn by	Höfer
		Edge tolerances acc. to DIN ISO 13715		Checked	16.08.2021 Milles
		Surface finish DIN EN ISO 1302	We reserve all rights to this document, to any patents or patent registrations related hereto, and to the duplication, retransmission by third parties and misc. use. Any use of this document is not permitted without the written consent of STABILUS.	Document No.:	10210124
	Replaces:				Material No.:
	STABILUS	PISTON ROD			