



Ident. Doc.: 10151066
 *** Druckdatum: 01.10.2021 / 01:10:17 *** Ausdrucken nicht massentzuehlen ***
 PISTON ROD

supp No.	material no.	A	E
	processing and surface treatment acc. to STAB-Spec. 10006248 Tab. XVI optimized	overall length	length without endfitting stud
	(a) version 1		
	10006248 Tab. X		
	(b) version 2		
	10028959 Tab. I		
	(c) before grinding: Hardness depth and hardness test acc. to STAB-Spec. 10258370		
	(d) tolerances: +0,2 after turning +0,3 after straightening +0,3 after nisliding		
	(e) nitrided		
	material: 1.1193 S45C JISG 4051		
	approved lengths: 50-600 mm		

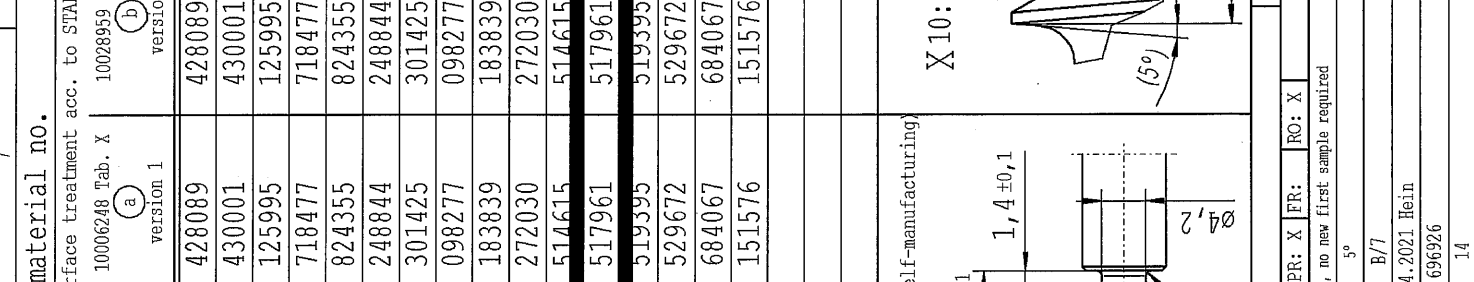

DB: X	EN: X	ES:	IT:	PR: X	FR:	RO: X
new						
old						
Field						
Date/Name						
Chg. No.						
Rev.						

supp No.	material no.	A	E
	processing and surface treatment acc. to STAB-Spec. 10006248 Tab. XVI optimized	overall length	length without endfitting stud
	(a) version 1		
	10006248 Tab. X		
	(b) version 2		
	10028959 Tab. I		
	(c) before grinding: Hardness depth and hardness test acc. to STAB-Spec. 10258370		
	(d) tolerances: +0,2 after turning +0,3 after straightening +0,3 after nisliding		
	(e) nitrided		
	material: 1.1193 S45C JISG 4051		
	approved lengths: 50-600 mm		

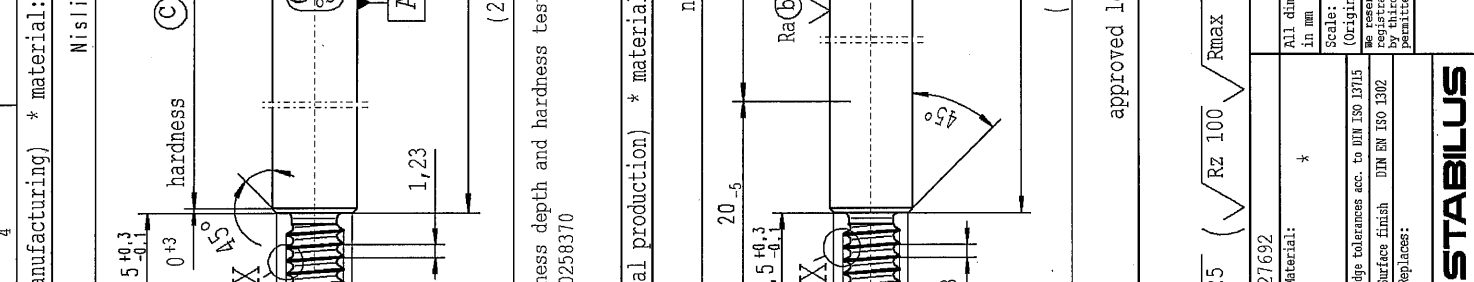

DB: X	EN: X	ES:	IT:	PR: X	FR:	RO: X
new						
old						
Field						
Date/Name						
Chg. No.						
Rev.						

supp No.	material no.	A	E
	processing and surface treatment acc. to STAB-Spec. 10006248 Tab. XVI optimized	overall length	length without endfitting stud
	(a) version 1		
	10006248 Tab. X		
	(b) version 2		
	10028959 Tab. I		
	(c) before grinding: Hardness depth and hardness test acc. to STAB-Spec. 10258370		
	(d) tolerances: +0,2 after turning +0,3 after straightening +0,3 after nisliding		
	(e) nitrided		
	material: 1.1193 S45C JISG 4051		
	approved lengths: 50-600 mm		