The print-out is not subject to the modification service.
Intended for internal and supplier use
EN

supp. No.	material no. Surface treatment STAB-Spec. 10028959 Tab.I (b)	A overall length
1	137212	162
2	138168	165
3	138646	150
4	326268	108

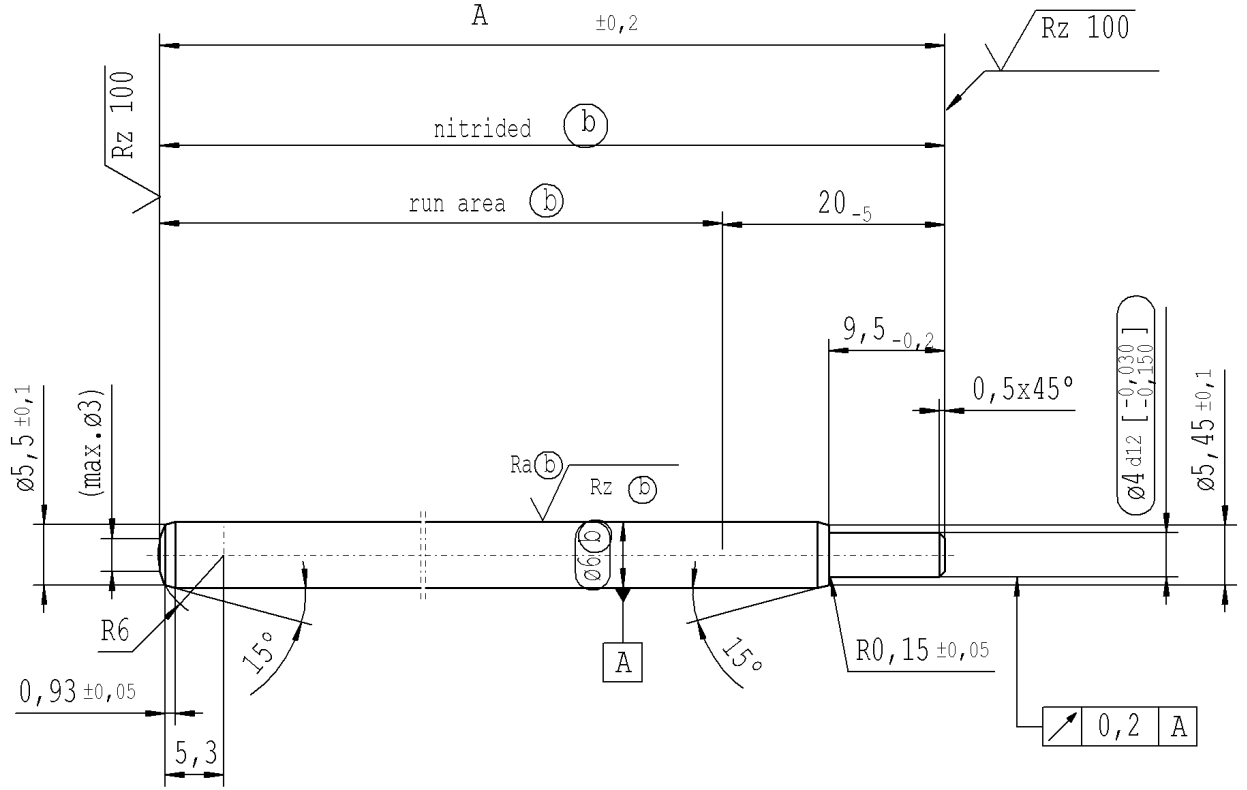

external production * material: 1.1193 S45C JISG 4051

approved lengths: 50-600 mm

Rz 25 (Rz 100 Ra (b) Rz (b))

+0,2 -0,2

sheet 1 of 1

AIAG CQI-standards acc. to STAB-Spec. 10027692

Environmental protection acc. to STAB-Spec. 10005649

DE: X	EN: X	ES:	IT:	PR:	FR:	RO: X	CAD created document; handwritten changes not permitted

new	INITIAL RELEASE	2016/0280	50-600mm	new format Supplier	(max.ø3); 5,3; 0,93 ±0,05
old	-	XXXX/xxxx	XXX-XXX	Supplier drawing separately	max.ø3
Field	-	AB/5-6		-	D/4-5
Date/Name	03.02.2016 Höfer	22.03.2016 Höfer		05.11.2020 Donat	21.07.2021 Hein
Chg. No.	-	635617		692703	699668
Rev.	0	1		2	3

Material: *

Edge tolerances acc. to DIN ISO 13715

Surface finish DIN EN ISO 1302

Replaces:

STABILUS

All dimensions are in mm

Marking of special characteristics according to STAB-Spec. 10270932

Scale: (Original DIN A3) 2:1

Dimensions without tolerances DIN ISO 2768-mK

We reserve all rights to this document, to any patents or patent registrations related hereto, and to the duplication, retransmission by third parties and misc. use. Any use of this document is not permitted without the written consent of STABILUS.

PISTON ROD

	Date	Name
Drawn by	03.02.2016	Höfer
Checked	21.07.2021	Klinkner

Document No.: 10230758

Material No.:

Ident. Doc.:

Bestelldatum: 21/7/2021 - 14:5

***** Druckdatum: 21.07.2021 / 14:05:23 ***** Ausdruck nicht massgetreu *****