





The print-out is not subject to the modification service.

Intended for internal and supplier use

EN

Ident. Doc.:

supp No.	material no.			A	E
	processing and surface treatment acc. to STAB-Spec. 10006248 Tab. XVI optimized version 1	10006248 Tab. X version 1	10028959 Tab. I version 2	overall length	length without endfitting stud
328	989988	989988	989988	210.0	201.5
329	054065	054065	054065	198.0	189.5
330	150860	150860	150860	163.5	155.0
331	169741	169741	169741	123.0	114.5

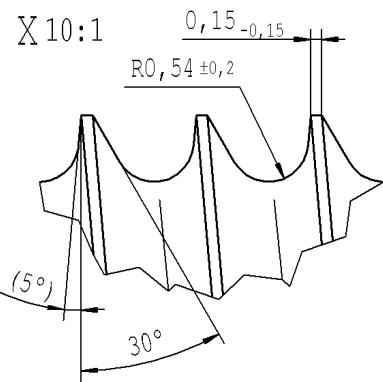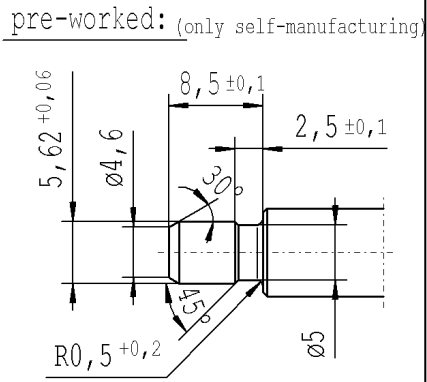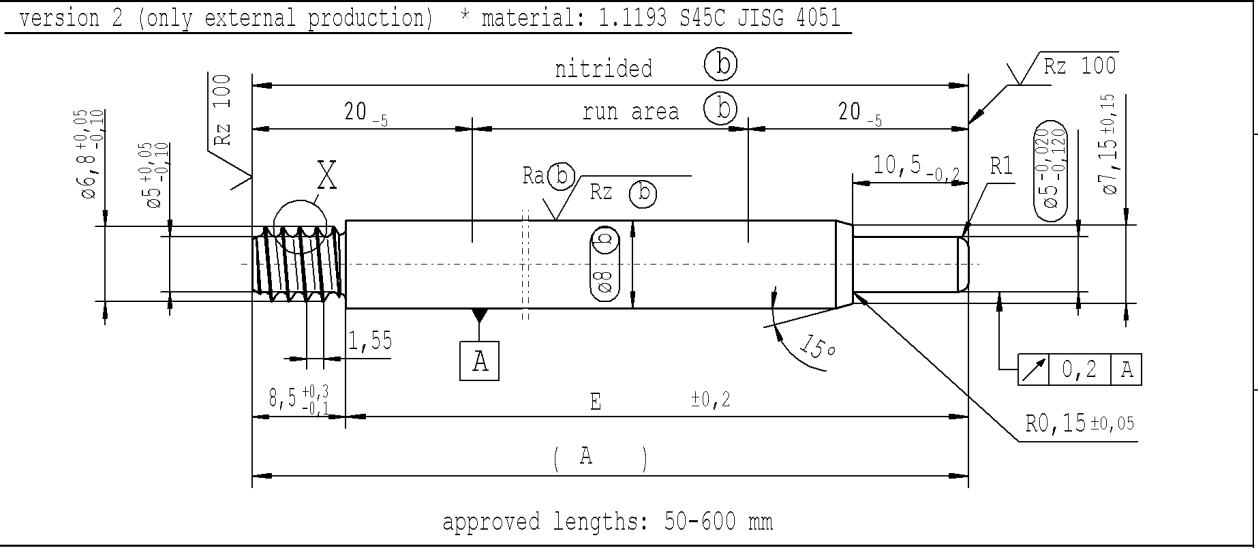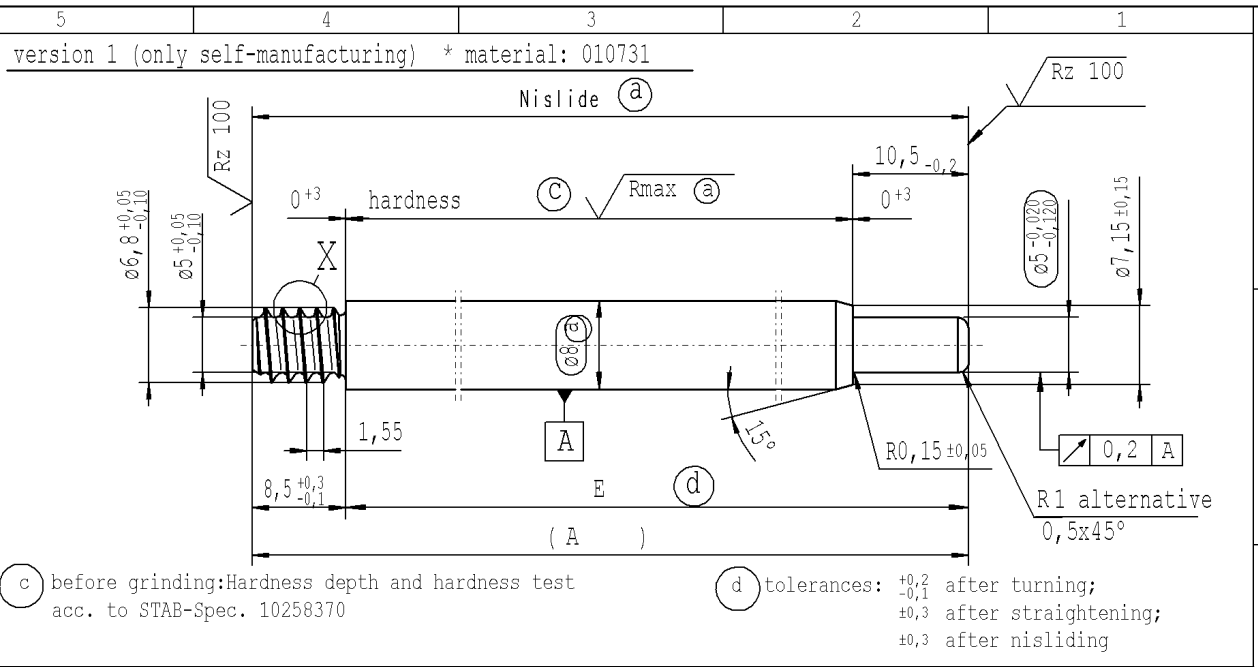

$\sqrt{Rz\ 25}$ ($\sqrt{Rz\ 100}$ \sqrt{Rmax} (a) Ra (b) Rz (b)) $\pm 0,2$ $-0,2$

sheet 16 of 16

AIAG CQI-standards acc. to STAB-Spec. 10027692				Environmental protection acc. to STAB-Spec. 10005649			
DE: X	EN: X	ES:	IT:	PR: X	FR:	RO: X	
CAD created document; handwritten changes not permitted				Material: *			
new (5°); no technical change, no new first sample required				All dimensions are in mm			
old 5°				Marking of special characteristics according to STAB-Spec. 10270932			
Field B/6-7				Scale: (Original DIN A3) 2:1			
Date/Name 31.03.2021 Hein				We reserve all rights to this document, to any patents or patent registrations related hereto, and to the duplication, retransmission by third parties and misc. use. Any use of this document is not permitted without the written consent of STABILUS.			
Chg. No. 696924				Date 05.12.2007			
Rev. 21				Checked 12.08.2021			
				Name Höfer			
				Document No.: 10151065			
				Material No.:			
				PISTON ROD			