

The print-out is not subject to the modification service.



Intended for internal and supplier use

EN

Brestelldatum: 01/12/2021 - 14:7

Ident. Doc.:

supp No.	material no.			A	B	E
	processing and surface treatment acc. to STAB-Spec. optimized			overall length	thread length	length without end-fitting stud
	10006248 Tab. XVI version 1	10006248 Tab. X version 1	10028959 Tab. I version 2			
1	177387	177387	177387	372	7	365
2	053587	053587	053587	183	7	176
3	196987	196987	196987	348	7	341
4	218975	218975	218975	396	7	389

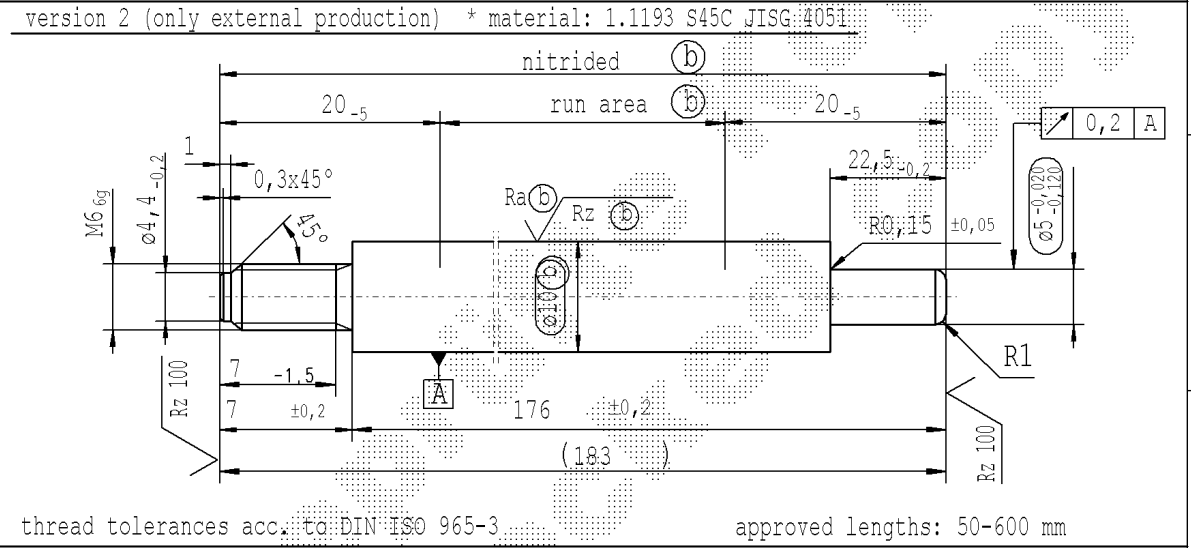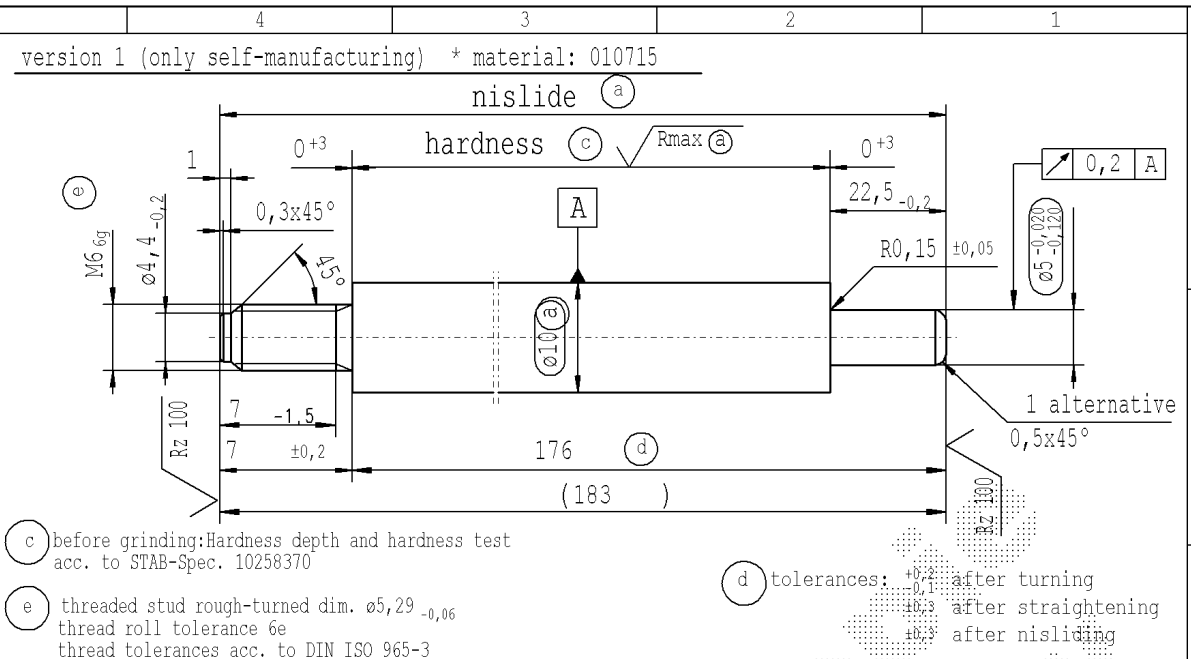

AIAG CQI-standards acc. to STAB-Spec. 10027692				Environmental protection acc. to STAB-Spec. 10005649			
DE: X	EN: X	ES:	IT:	PR:	FR:	RO: X	CAD created document handwritten changes not permitted
new	INITIAL RELEASE	Tab XVI no technical change, no new first sample required			Material: *		
old	-	Tab IV			All dimensions are in mm		
Field	-	F 8			Marking of special characteristics according to STAB-Spec. 10270932		
Date/Name	19.04.2021 Hein	16.08.2021 Donat			Scale: (Original DIN A3) 2:1		
Chg. No.	DC-20210419	699704			Dimensions without tolerances DIN ISO 2768-mK		
Rev.	0	0			We reserve all rights to this document, to any patents or patent registrations related hereto, and to the duplication, retransmission by third parties and misc. use. Any use of this document is not permitted without the written consent of STABILUS.		
STABILUS				PISTON ROD			
				sheet 1 of 1			
				Document No.: 10293117			
				Material No.:			