

The print-out is not subject to the modification service.



Intended for internal and supplier use

EN

Printed on: 01/12/2021 - 14:7

Ident. Doc.:

supp No.	material no.			A	B	E
	processing and surface treatment acc. to STAB-Spec. optimized			overall length	thread length	length without end-fitting stud
	10006248 Tab. XVI optimized version 1	10006248 Tab. X version 1	10028959 Tab. I version 2			
1	177387	177387	177387	372	7	365
2	053587	053587	053587	183	7	176
3	196987	196987	196987	348	7	341
4	218975	218975	218975	396	7	389

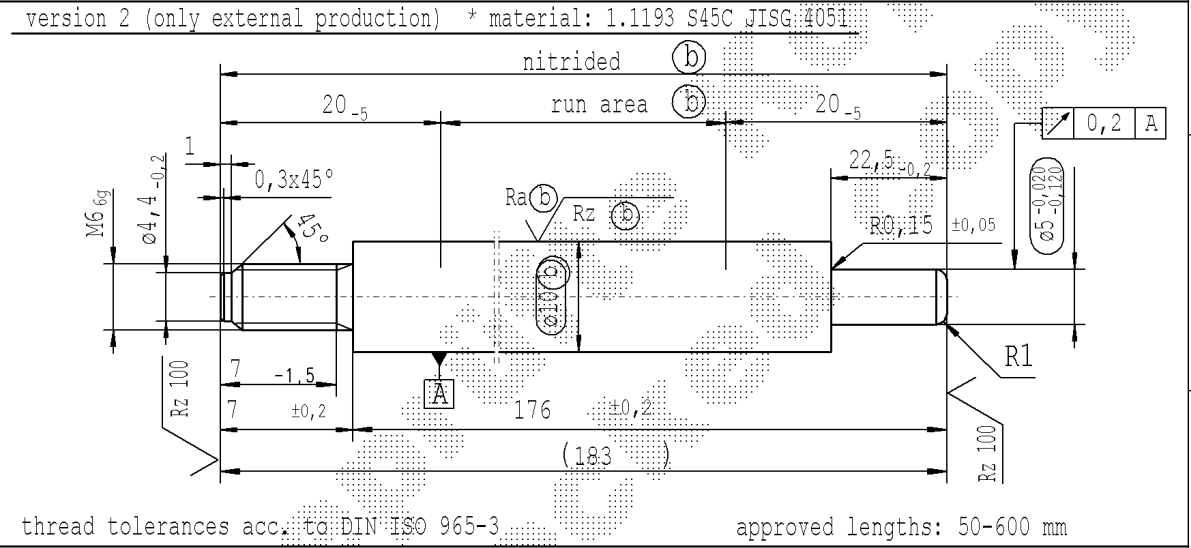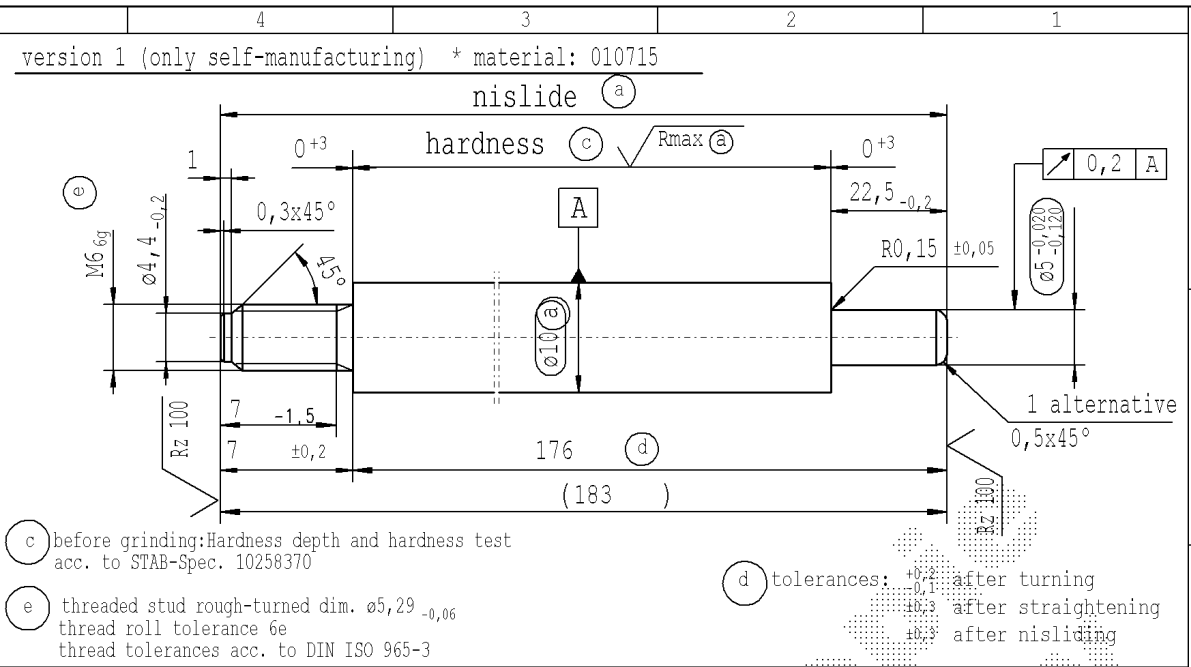

AIAG CQI-standards acc. to STAB-Spec. 10027692				Environmental protection acc. to STAB-Spec. 10005649			
DE: X	EN: X	ES:	IT:	PR:	FR:	RO: X	Material: *
CAD created document handwritten changes not permitted				All dimensions are in mm			
new	INITIAL RELEASE	Tab XVI no technical change, no new first sample required		Marking of special characteristics according to STAB-Spec. 10270932		Date: 19.04.2021 Name: Hein	
old	-	Tab IV		Scale: (Original DIN A3) 2:1		Checked: 16.08.2021 Milles	
Field	-	F 8		Surface finish: DIN EN ISO 1302		Document No.: 10293117	
Date/Name	19.04.2021 Hein	16.08.2021 Donat		Replaces:		Material No.:	
Chg. No.	DC-20210419	699704		We reserve all rights to this document, to any patents or patent registrations related hereto, and to the duplication, retransmission by third parties and misc. use. Any use of this document is not permitted without the written consent of STABILUS.			
Rev.	0	0		STABILUS		PISTON ROD	