The print-out is not subject to the modification service.

Intended for internal and supplier use

EN

Erstelldatum: 19/2/2021 - 14:28

supp. No.	material no. Surface treatment STAB-Spec. 10028959 Tab.I ⓑ	A overall length
1	201986	138
2	897482	252
3	898438	129
4	499071	150
5	763645	216
6	246213	153
7	375751	165
8	906332	84
9	100425	330
10	100664	273
11	104010	228
12	911591	201
13	441479	369
14	481870	141
15	483543	123
16	484499	180
17	492625	171
18	916612	162
19	918524	222
20	919958	192
21	923304	270

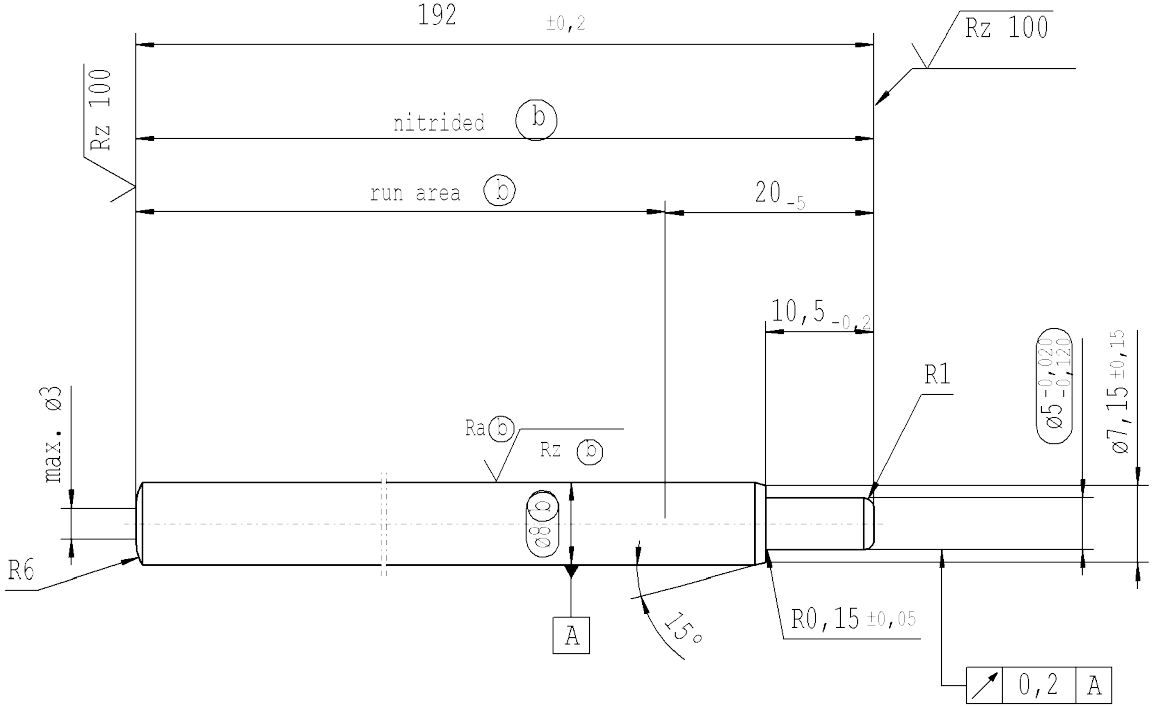

external production * material: 1.1193 S45C JISG 4051

approved lengths: 50-600 mm

Rz 25 (Rz 100 Ra ⓑ Rz ⓑ) +0,2 -0,2

sheet 1 of 1

AIAG CQI-standards acc. to STAB-Spec. 10027692

Environmental protection acc. to STAB-Spec. 10005649

DE: X	EN: X	ES:	IT:	PR:	FR:	RO: X	CAD created document handwritten changes not permitted
new	revised	product family: 2019/0334	ⓒ = acc. STAB-Spec. 10258370	new format Supplier			
old	-	product family: 2018/xxxx	ⓒ = RHT 0,4 .... 0,7 mm	Supplier drawing separately			
Field	-	C/5-6	B 5-6	-			
Date/Name	17.09.2018 Höfer	10.04.2019 Hein	08.05.2019 Höfer	09.11.2020 Donat			
Chg. No.	671841	677737	678170	692739			
Rev.	1	2	3	4			

Material: *

Edge tolerances acc. to DIN ISO 13715

Surface finish DIN EN ISO 1302

Replaces:

STABILUS

All dimensions are in mm

Marking of special characteristics according to STAB-Spec. 10270932

Scale: (Original DIN A3) 2:1

Dimensions without tolerances DIN ISO 2768-mK

We reserve all rights to this document, to any patents or patent registrations related hereto, and to the duplication, retransmission by third parties and misc. use. Any use of this document is not permitted without the written consent of STABILUS.

	Date	Name
Drawn by	06.03.2017	Höfer
Checked	09.11.2020	Klinkner

Document No.: 10242572

Material No.:

PISTON ROD

Ident. Doc.: