


Intended for internal and supplier use. The print-out is not subject to the modification service.

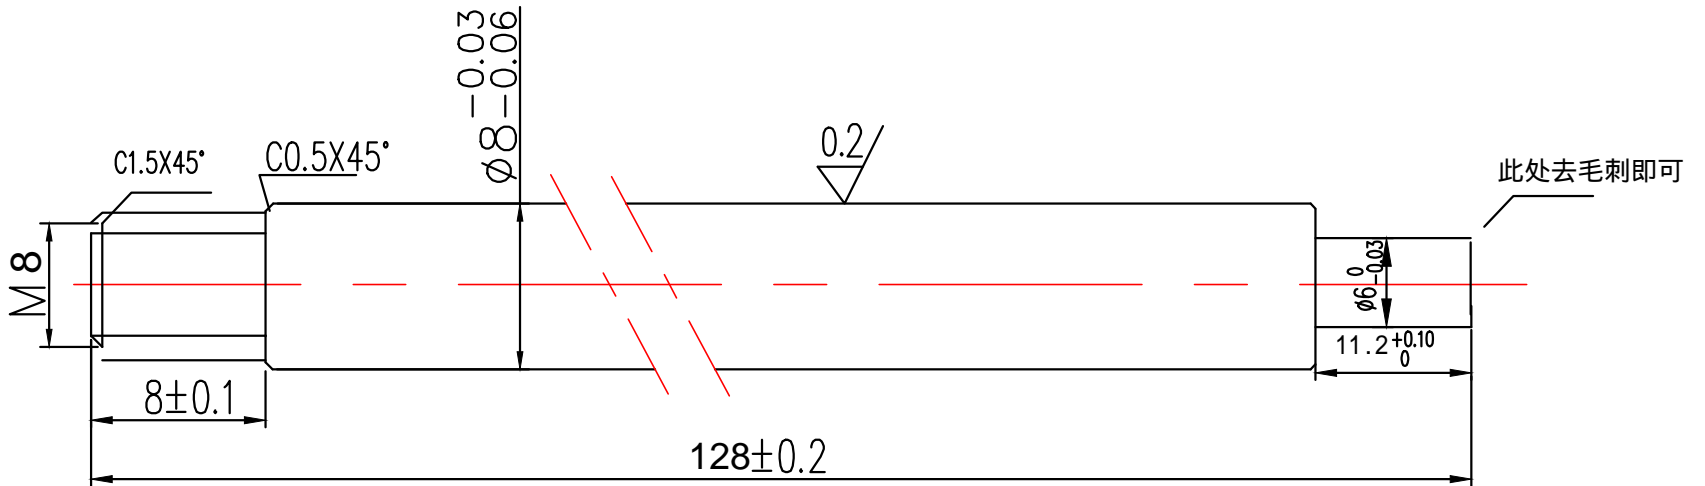

技术要求

1. 未注倒角处均为 $C0.3 \times 45^\circ$;
2. 活塞杆表面QPQ处理; 表面光洁, 无划伤, 色泽均匀, 无明显的花斑, 附着沉淀物;
3. 盐雾试验不低于144h, 粗糙度 $Ra < 0.1$;
4. 硬度 $430HV-0.1min$

EN

4	DE:		
	N		
	C		
	F		
	Da		
	Char		
	Re		
活塞杆8-128		江苏精达	
		Material No.: ---	