



The print-out is not subject to the modification service.

Intended for internal and supplier use

EN

Ident. Doc.:

supp No.	material no.			A	B	E
	10006248 Tab. XVI optimized version 1	10006248 Tab. X version 1	10028959 Tab. I version 2	overall length	thread length	length without end-fitting stud
31	327002	327002	327002	309	7	302
32	327480	327480	327480	360	7	353
33	328675	328675	328675	327	7	320
34	329153	329153	329153	351	7	344
35	455106	455106	455106	189	7	182
36	607110	607110	607110	528	7	521
37	634356	634356	634356	315	7	308
38	638658	638658	638658	339	7	332
39	735931	735931	735931	411	7	404
40	997158	997158	997158	348	7	341
41	051914	051914	051914	246	7	239
42	226862	226862	226862	258	7	251

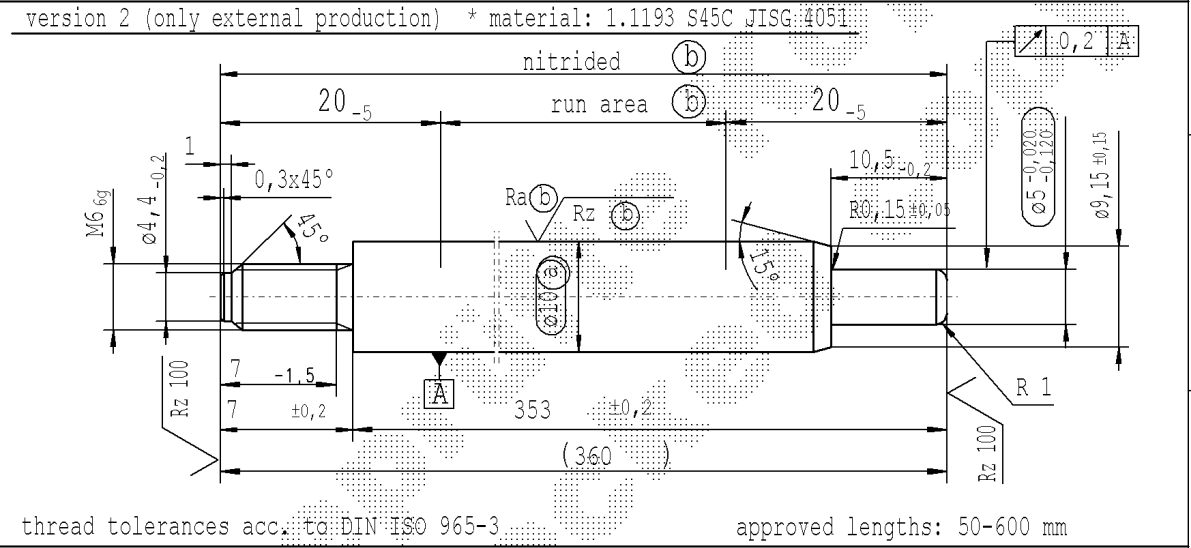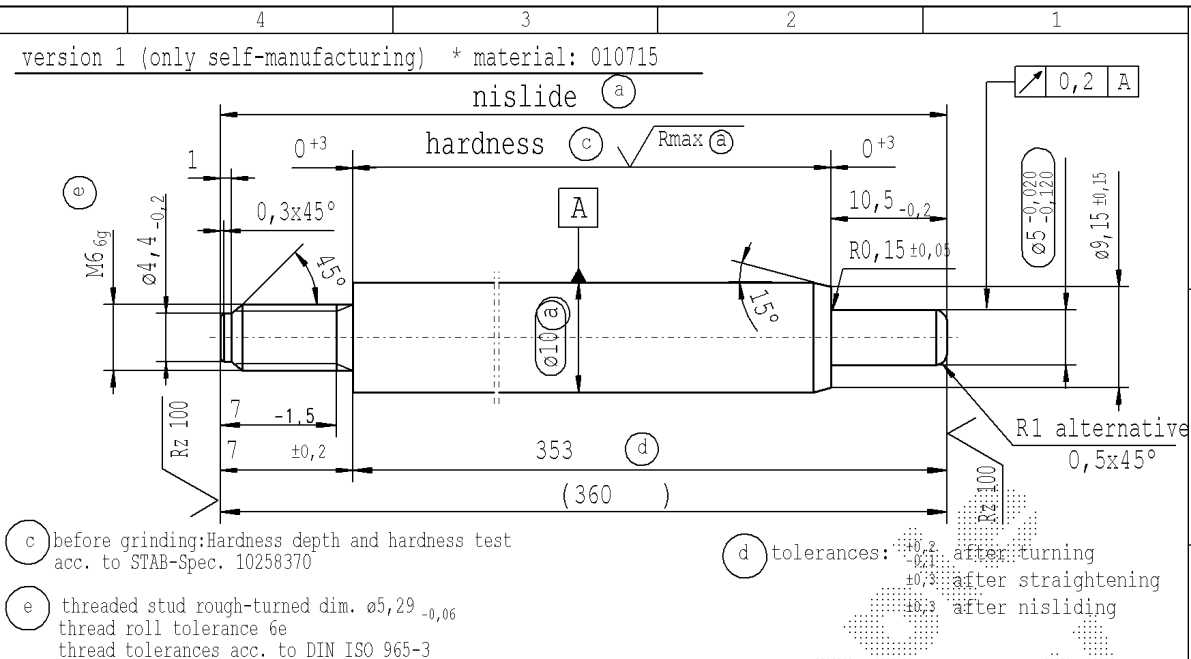

AIAG CQI-standards acc. to STAB-Spec. 10027692				Environmental protection acc. to STAB-Spec. 10005649			
DE: X	EN: X	ES:	IT:	PR:	FR:	RO: X	Material: *
new	© = acc. STAB-Spec. 10258370		new format Internal/Supplier		Tab XVI no technical change, no new first samples required		
old	© = RHT 0,4 0,7 mm		Supplier drawing separately		Tab IV		
Field	C 5-6		-		F 8		
Date/Name	15.05.2019 Donat		16.06.2020 Höfer		16.08.2021 Donat		
Chg. No.	678703		688989		699704		
Rev.	6		7		7		
All dimensions are in mm Scale: (Original DIN A3) 2:1 Marking of special characteristics according to STAB-Spec. 10270932 Dimensions without tolerances DIN ISO 2768-mK				We reserve all rights to this document, to any patents or patent registrations related hereto, and to the duplication, retransmission by third parties and misc. use. Any use of this document is not permitted without the written consent of STABILUS.			
STABILUS				PISTON ROD			
Date: 19.11.2008 Name: Hein				Date: 16.08.2021 Name: Milles			
Document No.: 10160325				Material No.:			

sheet 2 of 2