
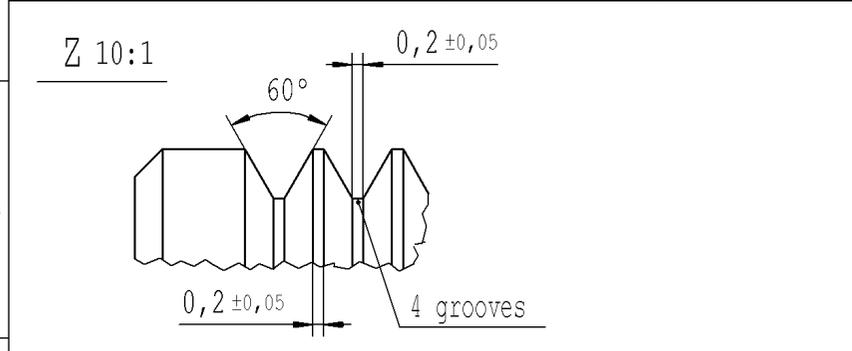
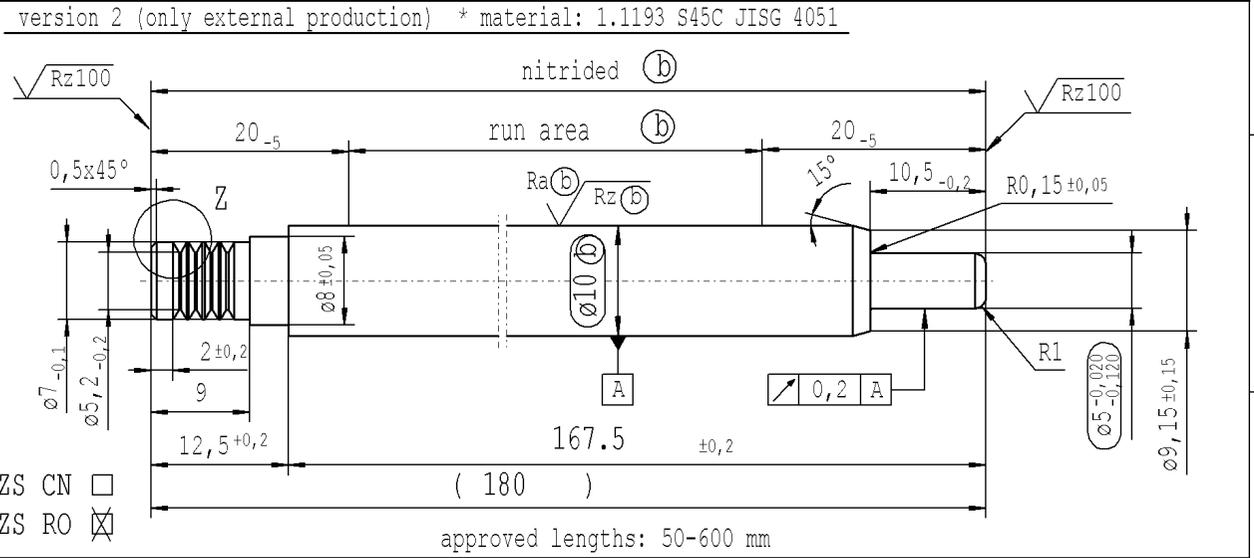


The print-out is not subject to the modification service.

Intended for internal and supplier use

Ident. Doc.:
Date/Name: 17.05.2022 - 14:22

supp No.	material no.			A	E
	10006248 Tab. IV version 1	10006248 Tab. X version 1	10028959 Tab. I version 2	overall length	length without endfitting stud
1	193878	193878	193878	171	158.5
2	600181	600181	600181	207	194.5
3	608307	608307	608307	180	167.5

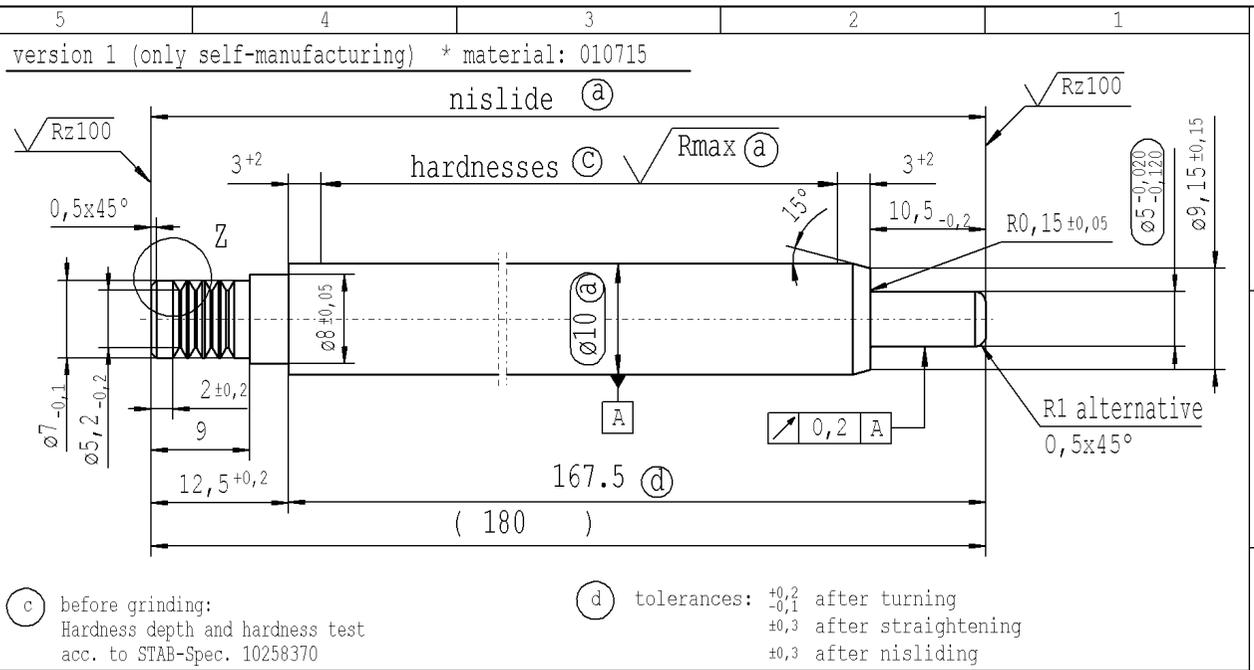

$\sqrt{Rz\ 25}$ ($\sqrt{Rz\ 100}$ $\sqrt{R_{max}}$ (a) Ra (b) Rz (b)) $\begin{matrix} +0,2 \\ -0,2 \end{matrix}$

sheet 1 of 1

AIAG CQI-standards acc. to STAB-Spec. 10027692				Environmental protection acc. to STAB-Spec. 10005649			
DE: X	EN: X	ES:	IT:	PR:	FR:	RO: X	CAD created document handwritten changes not permitted
new	INITIAL RELEASE	ZS CN / ZS RO no technical change, no new first sample required					
old	-	-					
Field	-	B/5					
Date/Name	07.05.2021 Hein	14.04.2022 Hein					
Chg. No.	-	709727					
Rev.	0	0					
Material: *				All dimensions are in mm			
Edge tolerances acc. to DIN ISO 13715				Marking of special characteristics according to STAB-Spec. 10270932			
Surface finish DIN EN ISO 1302				Scale: (Original DIN A3) 2:1			
Replaces:				Dimensions without tolerances DIN ISO 2768-mK			
STABILUS				We reserve all rights to this document, to any patents or patent registrations related hereto, and to the duplication, retransmission by third parties and misc. use. Any use of this document is not permitted without the written consent of STABILUS.			
PISTON ROD				Date: 07.05.2021 Name: C.Hein			
				Checked: 14.04.2022 Klinkner			
				Document No.: 10293634			
				Material No.:			