supp. No.	material no. Surface treatment STAB-Spec. 10028959 Tab.I (b)	A overall length
1	682626	162.0
2	100186	147.0
3	105922	144.0
4	112375	201.0
5	113331	249.0
6	913981	381.0
7	561935	168.0
8	563608	261.0
9	575558	363.0
10	308357	84.0
11	473034	265.5

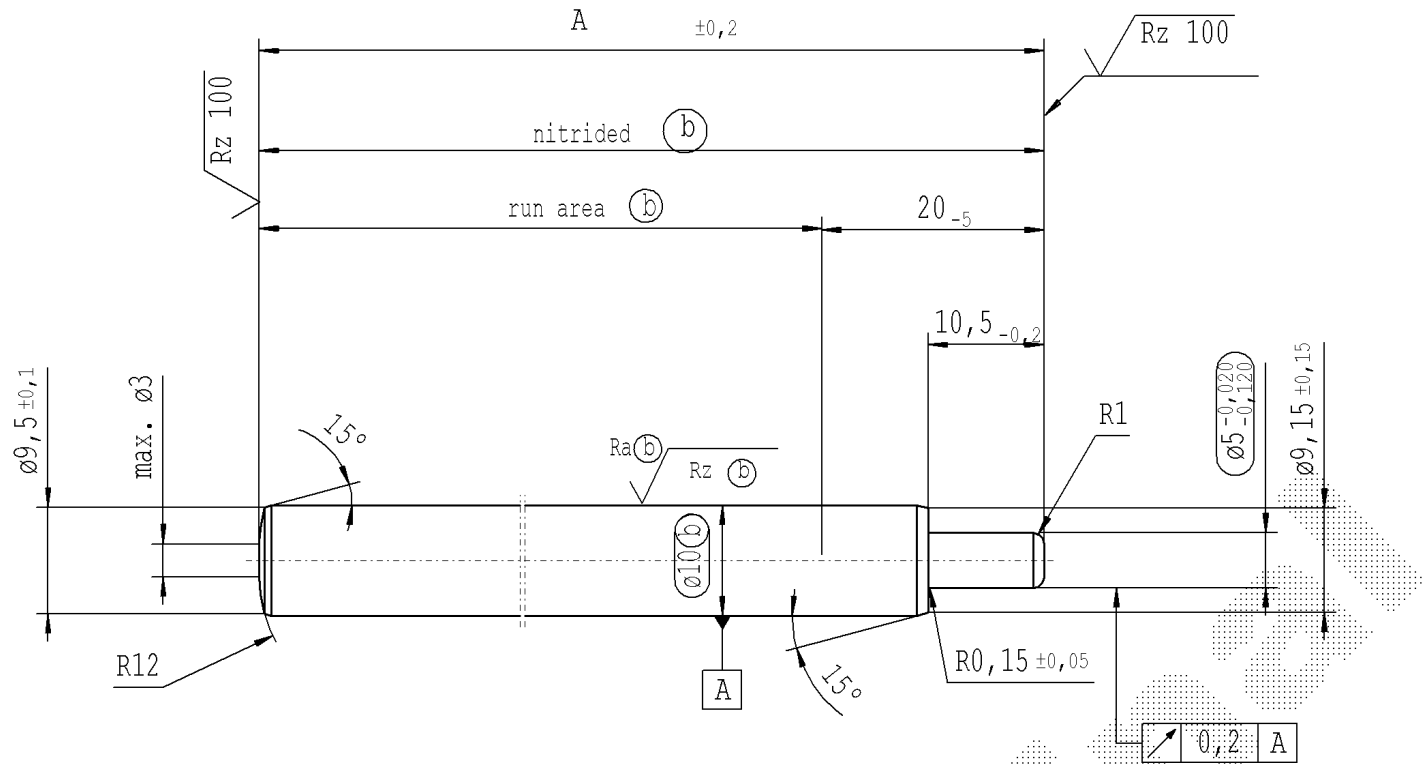

external production * material: 1.1193 S45C JISG 4051

approved lengths: 50-600 mm

Rz 25 (Rz 100 Ra (b) Rz (b)) +0,2 -0,2

sheet 1 of 1

AIAG CQI-standards acc. to STAB-Spec. 10027692

Environmental protection acc. to STAB-Spec. 10005649

DE: X	EN: X	ES:	IT:	PR:	FR:	RO: X	CAD created document; handwritten changes not permitted

new	INITIAL RELEASE	new format Supplier	
old	-	Supplier drawing separately	
Field	-	-	
Date/Name	10.12.2019 Höfer	09.11.2020 Donat	
Chg. No.	-	692776	
Rev.	0	1	

Material: *

Edge tolerances acc. to DIN ISO 13715

Surface finish DIN EN ISO 1302

Replaces:

STABILUS

All dimensions are in mm

Marking of special characteristics according to STAB-Spec. 10270932

Scale: (Original DIN A3) 2:1

Dimensions without tolerances DIN ISO 2768-mK

We reserve all rights to this document, to any patents or patent registrations related hereto, and to the duplication, retransmission by third parties and misc. use. Any use of this document is not permitted without the written consent of STABILUS.

	Date	Name
Drawn by	10.12.2019	Höfer
Checked	09.11.2020	Klinkner

Document No.: 10272399

Material No.:

PISTON ROD

The print-out is not subject to the modification service.
Intended for internal and supplier use
EN
Erstelldatum: 1/6/2022 - 8:53
Ident. Doc.:
***** Druckdatum: 20.07.2022 / 04:23:24 ***** Ausdruck nicht massgetreu *****
PLANT: RO01 PRINTER : AFANG DOK-NR.:10272399