

The print-out is not subject to the modification service.




Intended for internal and supplier use

EN

Brevet.datum: 10/17/2022 - 9:19

Ident. Doc.:

supp No.	material no.			A	E
	processing and surface treatment acc. to STAB-Spec. 10006248 Tab. XVI optimized version 1 (a)	10006248 Tab. X version 1 (a)	10028959 Tab. I version 2 (b)	overall length	length without endfitting stud
1	792303	792303	792303	219.0	210.5
2	792542	792542	792542	222.0	213.5
3	296408	296408	296408	285.5	277.0
4	963221	963221	963221	216.0	207.5
5	139628	139628	139628	100.5	92.0
6	141301	141301	141301	110.5	102.0
7	254109	254109	254109	282.0	273.5
8	312664	312664	312664	153.0	144.5
9	359030	359030	359030	225.0	216.5
10	666145	666145	666145	168.0	159.5
11	856867	856867	856867	204.0	195.5

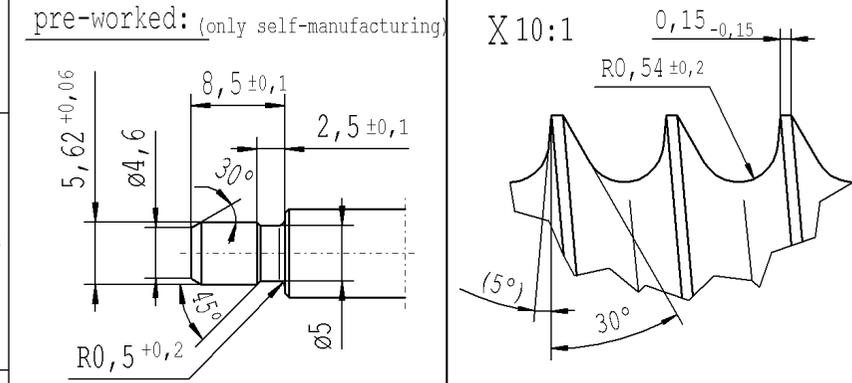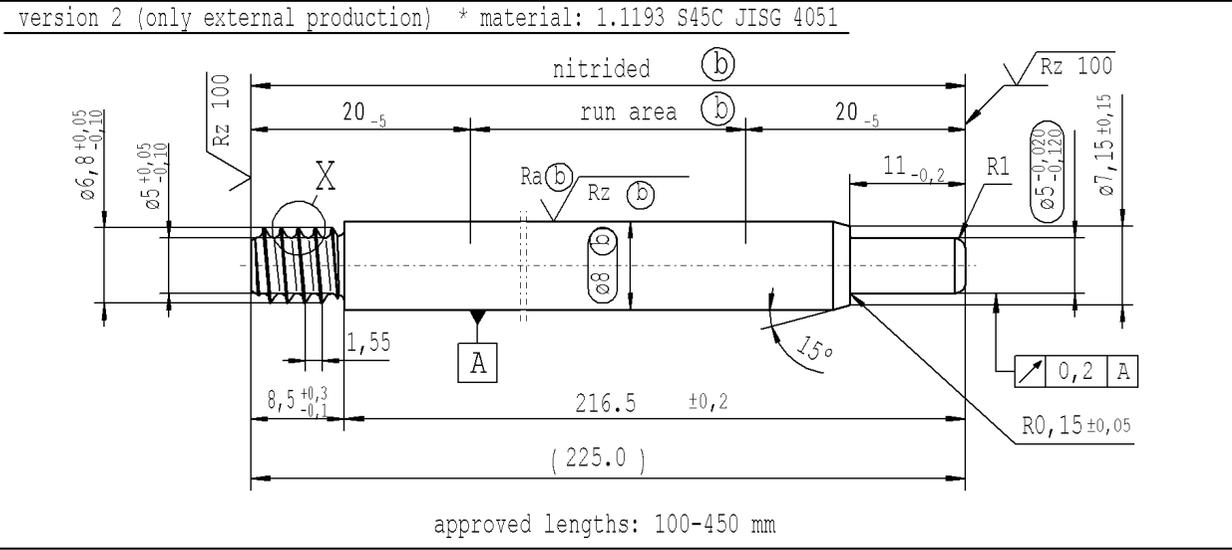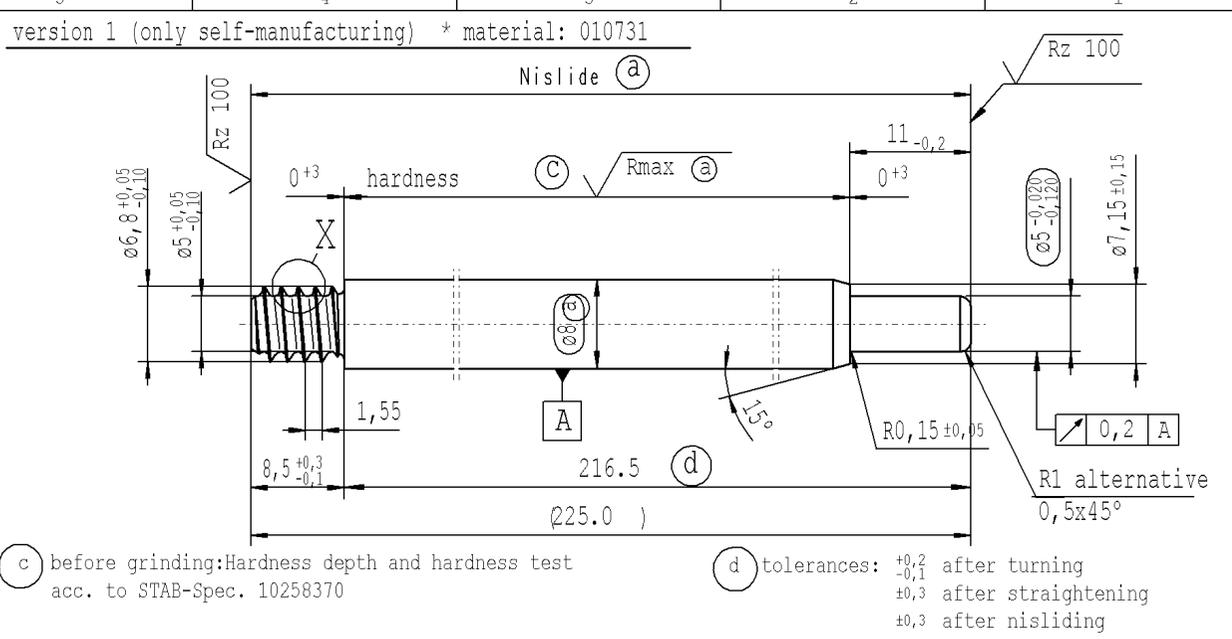

$\sqrt{Rz\ 25}$  ( $\sqrt{Rz\ 100}$   $\sqrt{Rmax}$  (a)  $Ra$  (b)  $Rz$  (b))  $\pm 0.2$   $-0.2$

sheet 1 of 1

AIAG CQI-standards acc. to STAB-Spec. 10027692				Environmental protection acc. to STAB-Spec. 10005649			
DE: X	EN: X	ES:	IT:	PR: X	FR:	RO: X	CAD created document handwritten changes not permitted
new	Tab XVI no technical change, no new first sample required			11 $_{-0,2}$		Material: *	
old	Tab IV			10,5 $_{-0,2}$		All dimensions are in mm	
Field	F 8			C/2		Marking of special characteristics according to STAB-Spec. 10270932	
Date/Name	16.08.2021 Donat			22.02.2022 Hein		Scale: (Original DIN A3) 2:1	
Chg. No.	699704			707194		Dimensions without tolerances DIN ISO 2768-mK	
Rev.	4			5		We reserve all rights to this document, to any patents or patent registrations related hereto, and to the duplication, retransmission by third parties and misc. use. Any use of this document is not permitted without the written consent of STABILUS.	
						Document No.: 10213229 Material No.:	
						STABILUS PISTON ROD	