

The print-out is not subject to the modification service.



Intended for internal and supplier use

EN

Printed date: 7/10/2021 - 8:52

Ident. Doc.:

supp No.	material no.			A	B
	processing and surface treatment acc. to STAB-Spec. optimized			overall length	thread length
	10006248 Tab. XVI	10006248 Tab. X	10028959 Tab. I		
	(a) version 1	(a) version 1	(b) version 2		
1	837740	837740	837740	345	20
2	112855	112855	112855	339	20

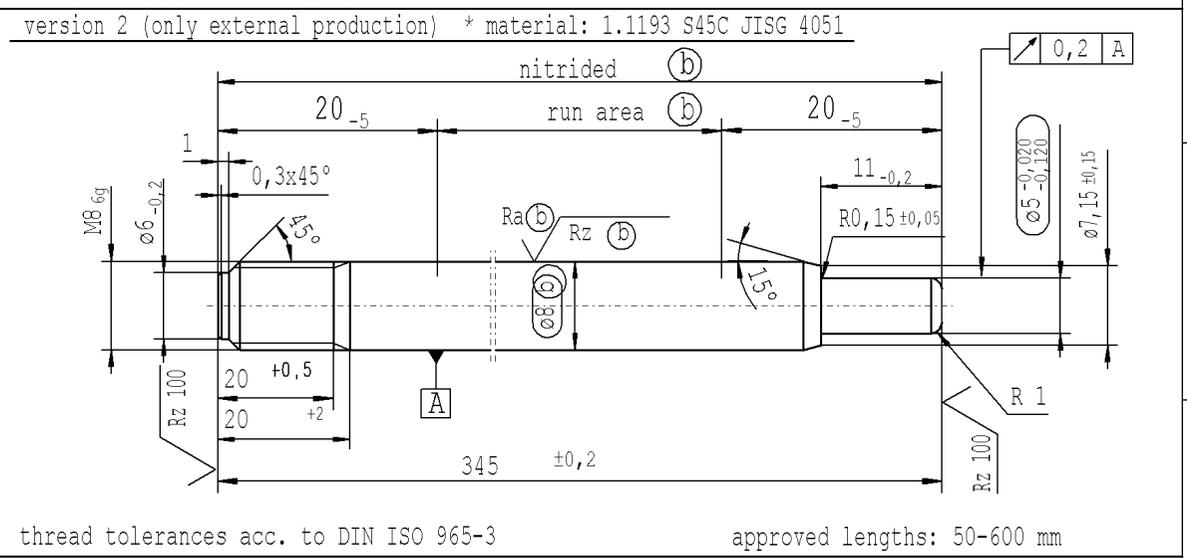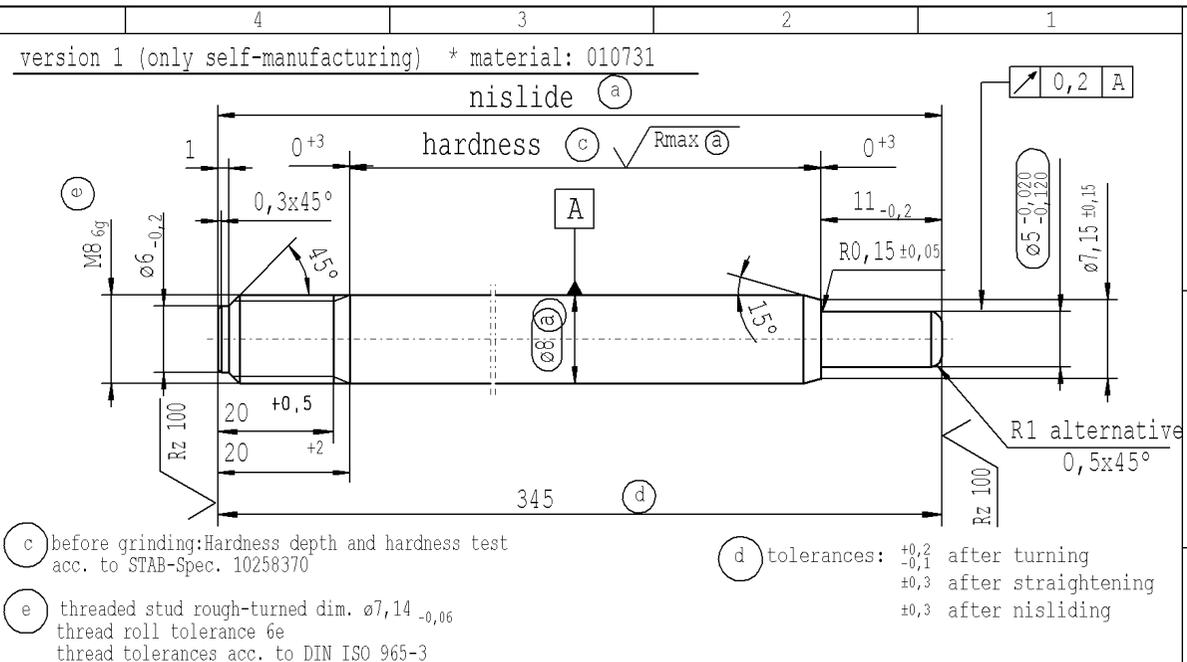

$\sqrt{Rz\ 25}$  ( $\sqrt{Rz\ 100}$   $\sqrt{R_{max}}$  (a)  $\sqrt{Ra}$  (b)  $\sqrt{Rz}$  (b))  $\downarrow +0,2$   $\downarrow -0,2$

sheet 1 of 1

AIAG CQI-standards acc. to STAB-Spec. 10027692				Environmental protection acc. to STAB-Spec. 10005649			
DE: X	EN: X	ES:	IT:	PR:	FR:	RO: X	CAD created document handwritten changes not permitted
new	Initial Release	Tab XVI no technical change, no new first sample required					
old	-	Tab IV					
Field	-	F 8					
Date/Name	03.07.2020 Höfer	16.08.2021 Donat					
Chg. No.	-	699704					
Rev.	0	0					
Material: *				All dimensions are in mm			
Edge tolerances acc. to DIN ISO 13715				Marking of special characteristics according to STAB-Spec. 10270932			
Surface finish DIN EN ISO 1302				Scale: (Original DIN A3) 2:1			
Replaces:				We reserve all rights to this document, to any patents or patent registrations related hereto, and to the duplication, retransmission by third parties and misc. use. Any use of this document is not permitted without the written consent of STABILUS.			
<b>STABILUS</b>				<b>PISTON ROD</b>			
				Date: 03.07.2020 Name: Höfer			
				Checked: 16.08.2021 Milles			
				Document No.: 10279637			
				Material No.:			