

The print-out is not subject to the modification service.



Intended for internal and supplier use

EN

Ident. Doc.:

Date: 20/12/2022 - 13:0

supp No.	material no.			A	B
	processing and surface treatment acc. to STAB-Spec. optimized			overall length	thread length
	10006248 Tab. XVI optimized version 1	10006248 Tab. X version 1	10028959 Tab. I version 2		
1	837740	837740	837740	279	20
2	112855	112855	112855	339	20
3	783016	783016	783016	348	20
4	783494	783494	783494	324	20
5	783972	783972	783972	336	20

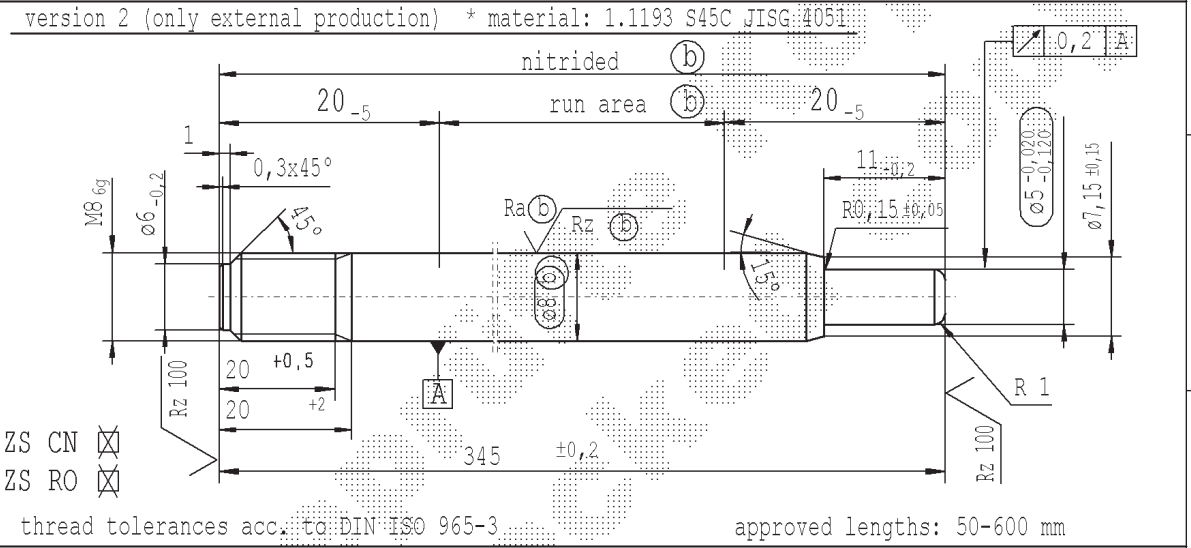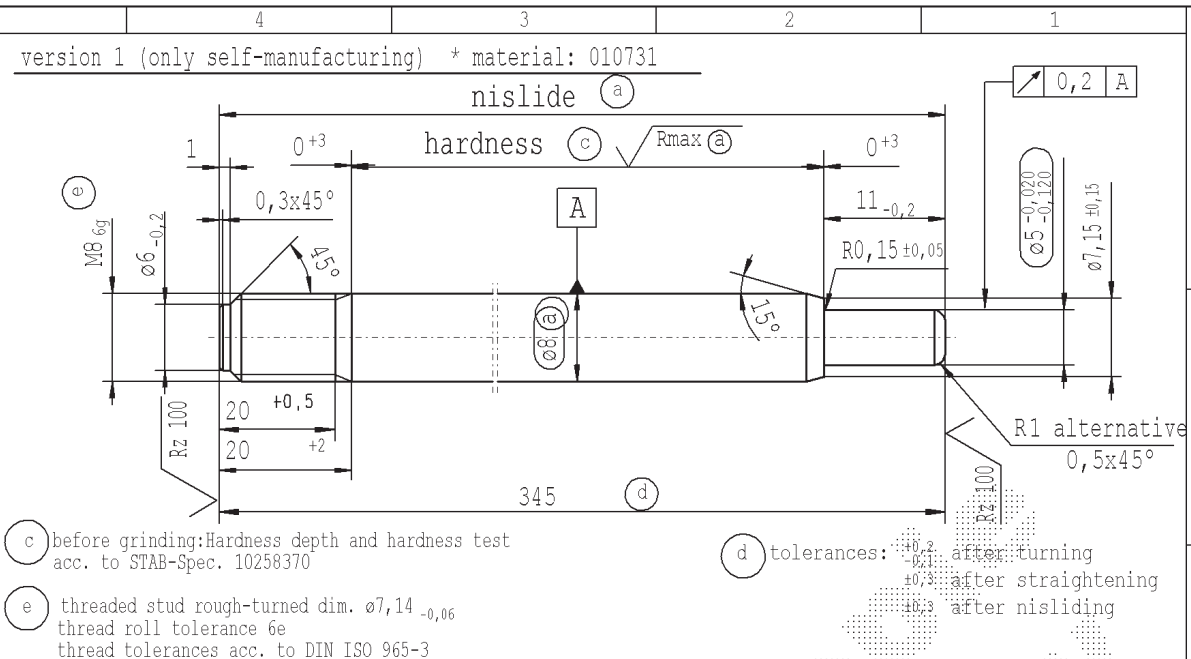

thread tolerances acc. to DIN ISO 965-3

approved lengths: 50-600 mm

sheet 1 of 1

AIAG CQI-standards acc. to STAB-Spec. 10027692				Environmental protection acc. to STAB-Spec. 10005649			
DE: X	EN: X	ES:	IT:	PR:	FR:	RO: X	CAD created document handwritten changes not permitted
new	Tab XVI no technical change, no new first sample required			ZS CN / ZS RO no technical change, no new first sample required			
old	Tab IV			-			
Field	F 8			B/5			
Date/Name	16.08.2021 Donat			10.03.2022 Hein			
Chg. No.	699704			707981			
Rev.	0			0			
Material: *				All dimensions are in mm			
Edge tolerances acc. to DIN ISO 13715				Marking of special characteristics according to STAB-Spec. 10270932			
Surface finish: DIN EN ISO 1302				Scale: (Original DIN A3) 2:1			
Replaces:				We reserve all rights to this document, to any patents or patent registrations related hereto, and to the duplication, retransmission by third parties and misc. use. Any use of this document is not permitted without the written consent of STABILUS.			
STABILUS				PISTON ROD			
				Date: 03.07.2020 Name: Höfer			
				Checked: 11.03.2022 Klinkner			
				Document No.: 10279637			
				Material No.:			