

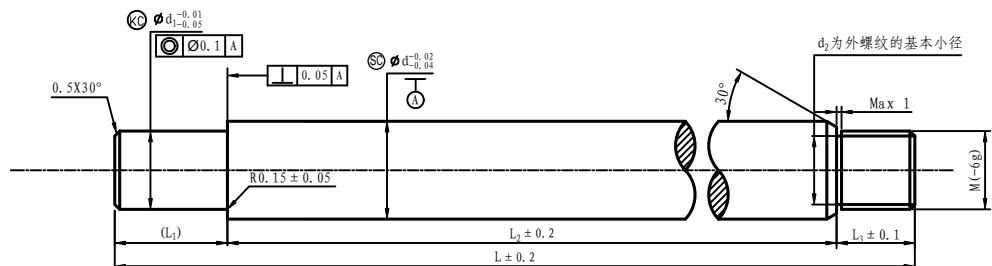


其余: 1.6/




序号 Y	d	d1	M (推荐)	L ₁ (FGS6X系列号)				
				(FGS60)	(FGS62)	(FGS64)	(FGS66)	(FGS68)
0	4	3	M4	—	5	—	—	—
1	6	5	M5/M6	8.5	9	10	11	12
2	8	6	M6					
2A	8	5	M6					
3	10	8	M8					
3A	10	6	M8					
4	12	8	M8					
4A	12	10	M8					
5	14	8	M10					
5A	14	10	M10					
6	16	8	M10					
6A	16	10	M10					

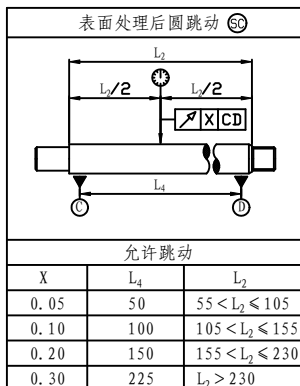

技术要求:

- 1 锐边倒圆R0.1-0.3
- 2 表面处理: QPQ
- ⑤ 表面光洁, 无划伤, 色泽均匀, 无明显的花斑、附着沉淀物(GB/T10125-2012中性盐雾试验 ≥ 144小时以上)
- ③ QPQ: 疏松层3-8 μm, 总渗层10-20 μm, 硬度HV0.1 ≥ 450;
- 4 活塞销接端折弯15°、螺纹端折弯10° 不允许折断;
- ⑤ ELV禁用物质满足GB/T 30512-2014。
- 6 标注方法: L为活塞杆总长、X为系列号(见左表)、Y为序号(见左表)、M为螺纹规格尺寸、L₃为螺纹长度, 即活塞杆图号为L-FGS6XYQPQ-MxL₃-Q;
例: 220.5-FGS602QPQ-M6x9-Q



未注尺寸公差

0~10	<10~30	<30~100	<100~300
±0.10	±0.20	±0.40	±0.80

ECR编号 ECR-No.	日期 Date	版本 Level	方位 Zone	编号 NO.	修改 Modification	设计 Name	审核 Checked
	2022.11.30	B	B5	①X3	变更活塞杆表面粗糙度要求, 新增粗糙度测试条件	夏超斌	干志超
	2022.10.31	A			首次发布		
特性按照XJ-APQP /Characteristics acc. XJ-APQP						其他特性/Others characteristics	
④X1 功能特性/Function Characteristics						0 S	
⑤X5 重要特性/Significant Characteristics						1 R	
④ 决定性特性/Critical Characteristics							
未经湘俊书面许可, 不得复制或向第三方评估本图纸。仅湘俊工程部保留对本图纸的所有修改和发布权利材料。/This drawing may not be copied or make assessable to a third person without written permissions of XJ. All rights reserved Modifications and release of this drawing by XJ engineering only.						结合中文 Chinese test is binding	比例 SCALE 1:1
原材料/Material 45#						客户/ Customer 客户图号/ Customer ID.	图幅/ Size A3
材料处理/Material treatment 未注公差 Generale tolerance ISO 2768 Classe cL						图号/ Drawing No L-FGS6XYQPQ-MxL ₃ -Q	
表面/Surface						货品编码/ ERP No	
材料标准/Material standard GB/T699-2015						名称/ Title 活塞杆	工厂/ Plant SHANGHAI
						代替/ Replaces	