


suppl No.	material no.	overall length
	Surface treatment STAB-Spec. 10028959 Tab. I (b)	A
32	190038	156
33	220871	225
34	222544	291
35	223022	159
36	524162	105
37	956514	108
38	566618	96
39	833911	90
40	430241	114
41	060270	135
42	091818	78
43	130297	99
44	309308	261
45	879803	133
46	055493	126
47	090626	111
48	095406	141
49	127195	144
50	167826	324
51	189097	309
52	194116	216
53	575322	84
54	509121	207
55	566964	318

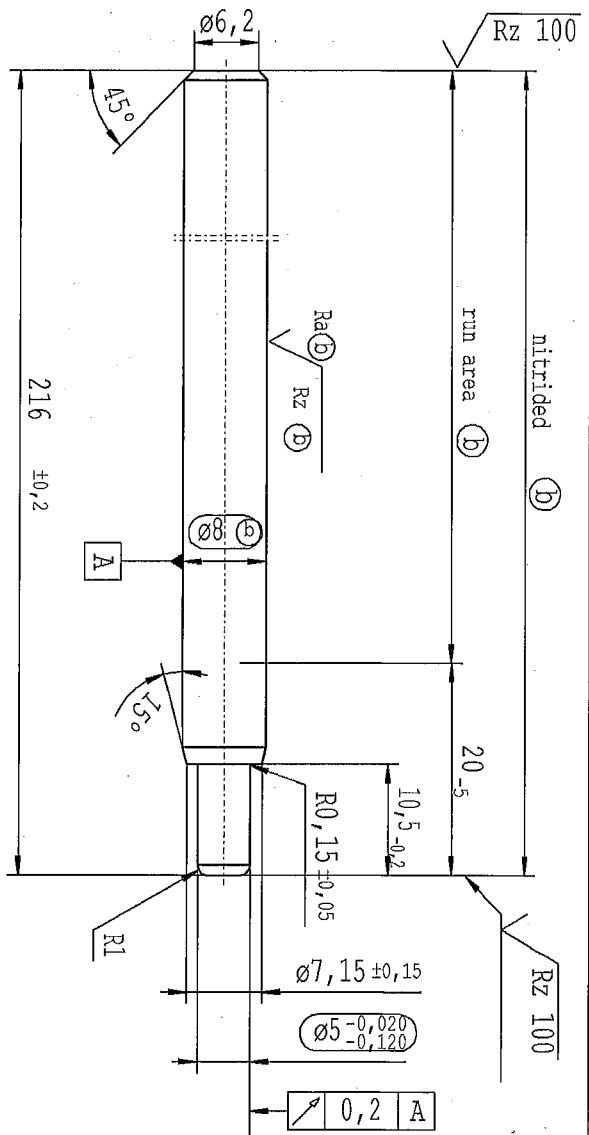

external production * material: 1.1193 S45C JISG 4051

approved lengths: 50-600 mm

√ Rz 25 (√ Rz 100) Ra 0,2 Rz 0,2) ±0,2 -0,2

Sheet 2
of 2

Field	old	new	DM: X	EM: X	ES:	IT:	PR:	FR:	RO: X	CD	Material:	Scale:	Environment	Document No.:	Date	Name:
Date/Name	19.07.2018 Höfer	29.08.2018 Jąblonski									*	2:1	Environmental protection acc. to STAB-Spec. 10005649	10154964	25.04.2008	Helit
Chg. No.	670346	671281													28.07.2020	Kihlner
Rev.	6	7														

STABILUS

PISTON ROD