


A		B		C		D		E		F	
supp	material no.	overall length	Ro: X	FR:	PR:	IT:	ES:	EM:	No.	Surface treatment	STAB-Spec. 10028959 Tab. I
									32	190038	156
									33	220871	225
									34	222544	291
									35	223022	159
									36	524162	105
									37	956514	108
									38	568618	96
									39	833911	90
									40	430241	114
									41	060270	135
									42	091818	78
									43	130297	99
									44	309308	261
									45	879803	133
									46	055493	126
									47	090626	111
									48	095406	141
									49	127195	144
									50	167826	324
									51	189097	309
									52	194116	216
									53	575322	84
									54	509121	207
									55	566964	318

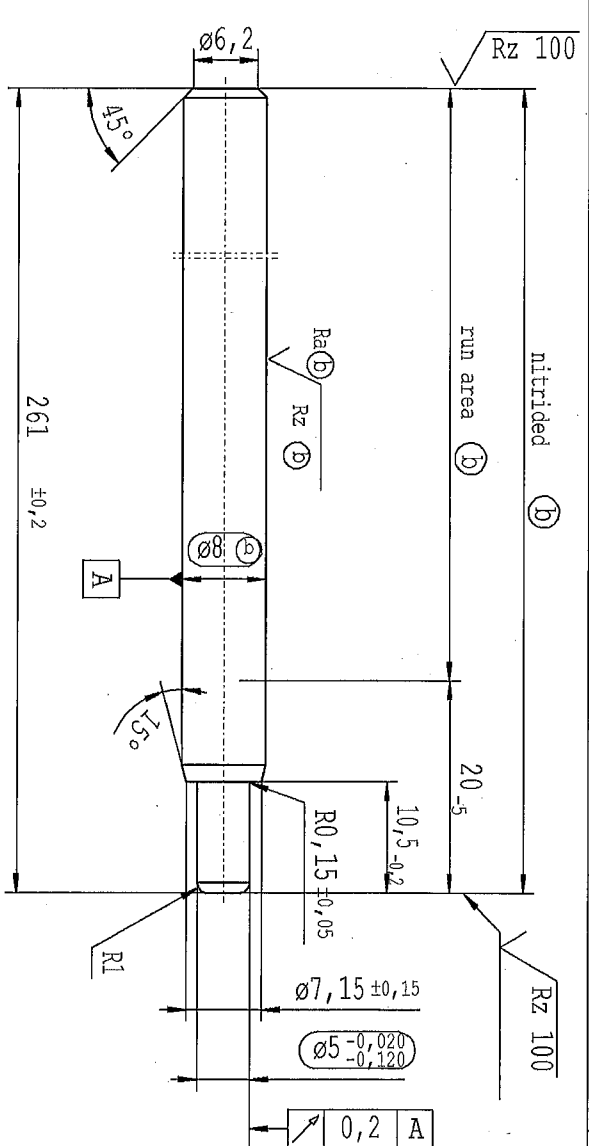

external production * material: 1.1193 S45C JISG 4051

approved lengths: 50-600 mm

√ Rz 25 (√ Rz 100 Ra(D) Rz (D)) ±0,2 ±-0,2

AIAG CQI-standards acc. to STAB-Spec. 10027692

Environmental protection acc. to STAB-Spec. 10005649

DE: X	EM: X	ES:	IT:	PR:	FR:	RO: X	Material: *	All dimensions are in mm	Marking of special characteristics according to STAB-Spec. 10270932	Date	Name
new	50-600 mm			revised				Scale: 2:1	Dimensions without tolerances	25.04.2008	Hein
old	100-600 mm							Scale: (Original DIN A3)	DIN ISO 2768 mK	28.07.2020	Klimke
Field	A5							no reserve all rights to this document, to any patents or patent applications, and to the supplier's, transmission of this document is not permitted without the written consent of STABILUS			
Date/Name	19.07.2018 Hefer			29.08.2018 Jablonski							
Doc. No.	670346			671281							
Rev.	6			7							

Document No.: 10154964

Sheet 2 of 2

STABILUS

PISTON ROD