


supp. No.	material no.	processing and surface treatment acc. to STAB-Spec. 10006248 Tab. X	overall length	length without endfitting stud
		version 1 (only self-manufacturing) * material: 010731		
		10006248 Tab. X		
		version 1		
		version 2		
F	182	838463	378.0	368.5
	183	839658	330.0	320.5
	184	841809	124.0	114.5
	185	843721	233.0	223.5
	186	844677	283.0	273.5
E	187	846111	187.5	178.0
	188	846828	174.0	164.5
	189	853759	296.0	286.5
	190	855193	160.0	150.5
	191	856149	285.0	275.5
	192	857344	218.0	208.5
	193	858300	219.5	210.0
D	194	859256	236.5	227.0
	195	859734	156.5	147.0
	196	865470	303.5	294.0
	197	868577	256.0	246.5
	198	870967	266.0	256.5
	199	874791	105.0	95.5
C	200	875986	147.0	137.5

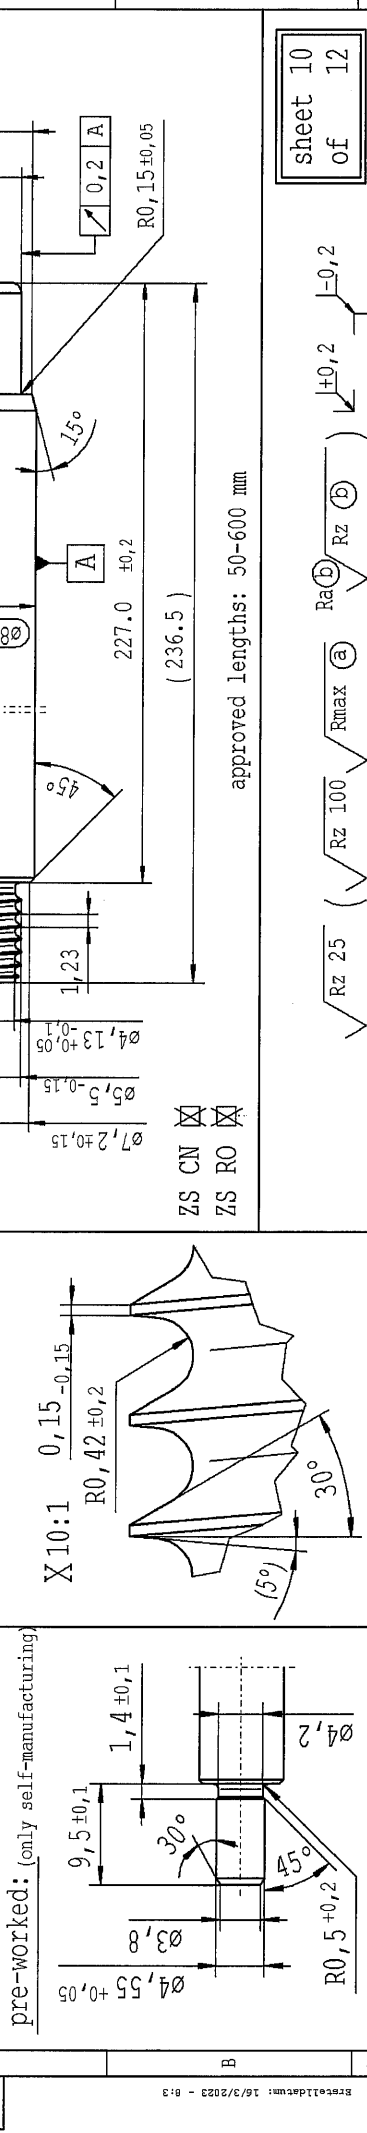

DR: X	EN: X	ES:	IT:	PR: X	FR:	RO: X	Material: AIAG CQI-standards acc. to STAB-Spec. 10027692
new	Tab XVI no technical change, no new first sample required			Tab IV			Material: *
old							All dimensions are in mm
Field							Scale: (Original DIN A3) 2:1
Date/Name	12.08.2021 Donat						Dimensions without tolerances DIN ISO 2768-mk
Eng. No.	699704						We reserve all rights to this document, to any patents or patent applications, to the production, reproduction, distribution, and use of this document as not permitted without the written consent of STABILUS.
Rev.	14						Document No.: 10151066
							Material No.: 10151066
							Environmental protection acc. to STAB-Spec. 10005649
							Marking of special characteristics according to STAB-Spec. 10270932
							Drawn by: 05.12.2007 Höfer
							Checked: 11.03.2022 Klunker
							Name: Klunker
							Date: 11.03.2022
							Sheet 10 of 12