

The print-out is not subject to the modification service.




Intended for internal and supplier use

EN

Ident. Doc.:

Date/Name

supp No.	material no.			A	E
	10006248 Tab. IV version 1	10006248 Tab. X version 1	10028959 Tab. I version 2		
41	827465		827465	137.5	129.5
42	500514		500514	198.0	190.0
43	522263		522263	162.0	154.0
44	524414		524414	119.0	111.0
45	524892		524892	84.0	76.0
46	544490		544490	156.0	148.0
47	553333		553333	143.5	135.5
48	576994		576994	190.0	182.0
49	590856		590856	108.0	100.0
50	595158		595158	168.0	160.0
51	604479		604479	173.0	165.0
52	636745		636745	66.0	58.0
53	134130		134130	97.5	89.5

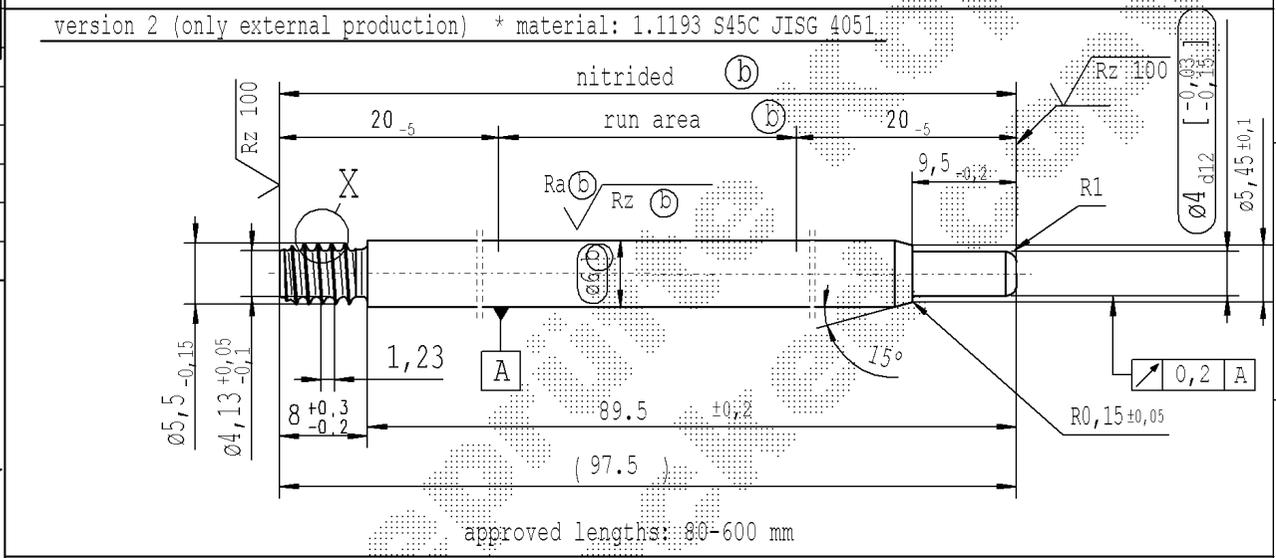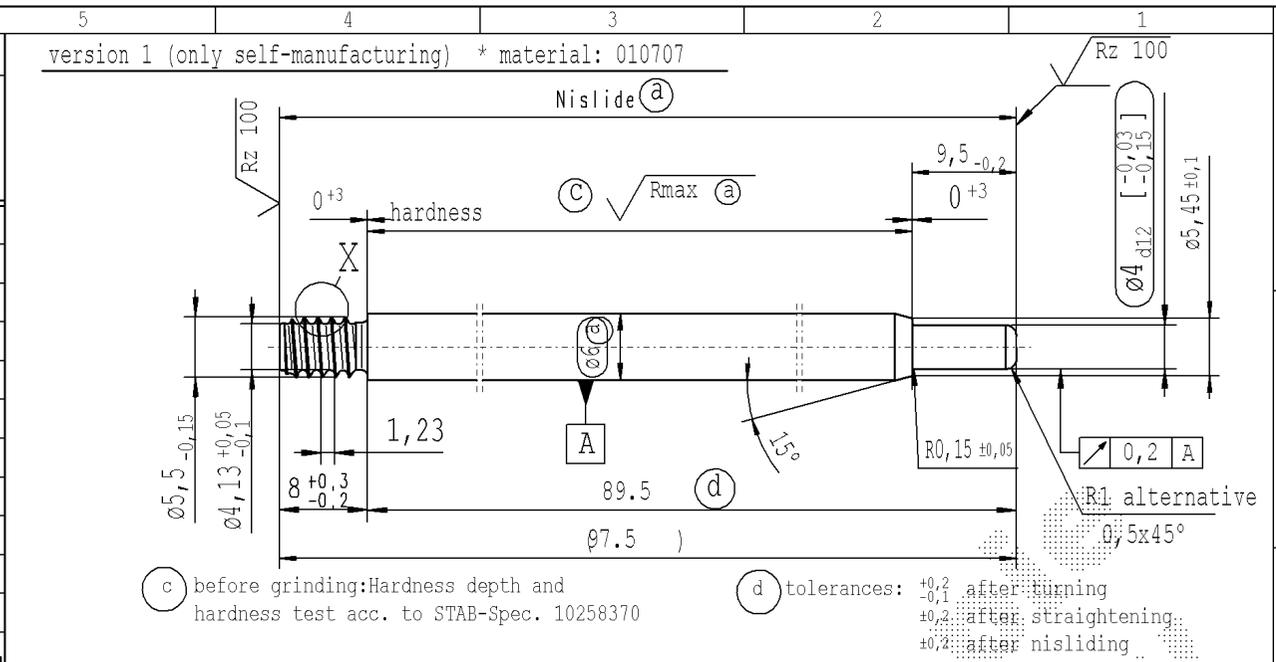

AIAG CQI-standards acc. to STAB-Spec. 10027692		Environmental protection acc. to STAB-Spec. 10005649	
DE: X	EN: X	ES:	IT:
new	approved lengths: 80-600mm	ZhangShi	detail X reworked
old	approved lengths: 80-200mm	China	-
Field	B/3-4	C3/F7	E-P/4-5
Date/Name	24.11.2015 Hein	20.04.2017 Höfer	15.04.2019 Hein
Chg. No.	630576	655549	677388
Rev.	6	7	8

sheet 3 of 3

**STABILUS**

PISTON ROD

10151336