

The print-out is not subject to the modification service.


Intended for internal and supplier use

EN


Ident. Doc.: L24

- Ⓐ piston rod processing per STAB-Spec. 10028959 tab.I
- Ⓛ knurl-profile manufactured with knurl roll DIN 82 - RAA 0,5



100% cleanliness of through hole

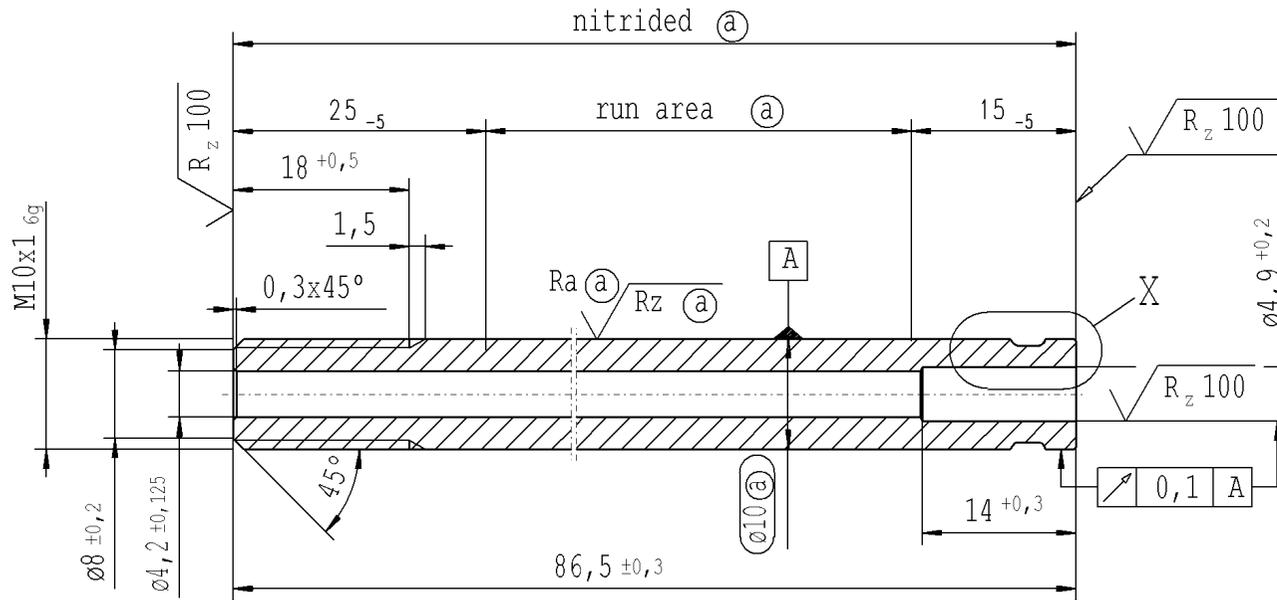

X 5:1
before knurling

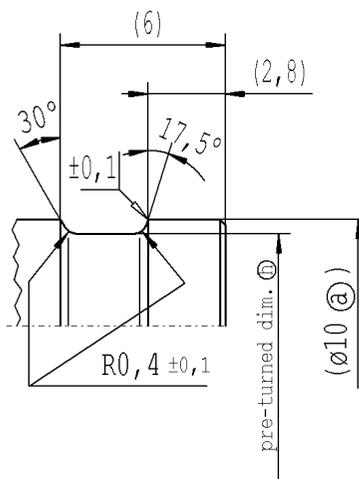

X 5:1
after knurling

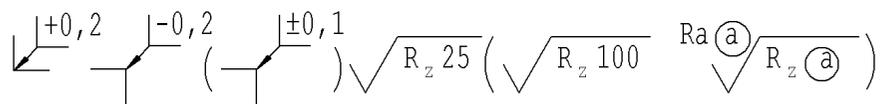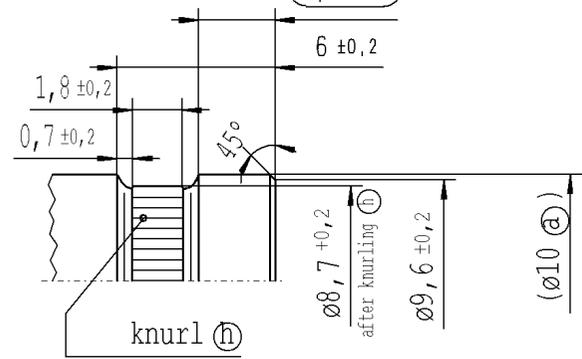

RELEASE
for supplier
company Zhang Shi

AIAG CQI-standards acc. to STAB-Spec. 10027692

Environmental protection acc. to STAB-Spec. 10005649

DE: X	EN: X	ES:	IT:	PR:	FR:	RO:	CAD created document; handwritten changes not permitted
new	INITIAL RELEASE		marking groove removed				
old	-		-				
Field	-		-				
Date/Name	11.07.2011 K.Marx		13.06.2014 Hein				
Chg. No.	589743		614234				
Rev.	0		1				

Material:	1.1193 S45C JISG 4051
Edge tolerances acc. to DIN ISO 13715	
Surface finish	DIN EN ISO 1302
Replaces:	
STABILUS	

All dimensions are in mm	Identification of important characteristics
Scale: (Original DIN A3) 2:1	Dimensions without tolerances DIN ISO 2768-mK
We reserve all rights to this document, to any patents or patent registrations related hereto, and to the duplication, retransmission by third parties and misc. use. Any use of this document is not permitted without the written consent of STABILUS.	
Document No.: 10152095	
Material No.: 849173	
PISTON ROD	

Drawn by	Date	Name
Checked	11.07.2011	K.Marx
	13.06.2014	Klinkner