

The print-out is not subject to the modification service.


Intended for internal and supplier use

EN

Bereitstellungsdatum: 30/12/2023 - 13:19

Ident. Doc.:

supp. No.	material no.	A
	Surface treatment STAB-Spec. 10028959 Tab.I (b)	overall length
1	682626	162.0
2	100186	147.0
3	105922	144.0
4	112375	201.0
5	113331	249.0
6	913981	381.0
7	561935	168.0
8	563608	261.0
9	575558	363.0
10	308357	84.0
11	473034	265.5
12	356405	204.0
13	387475	258.0
14	129834	210.0

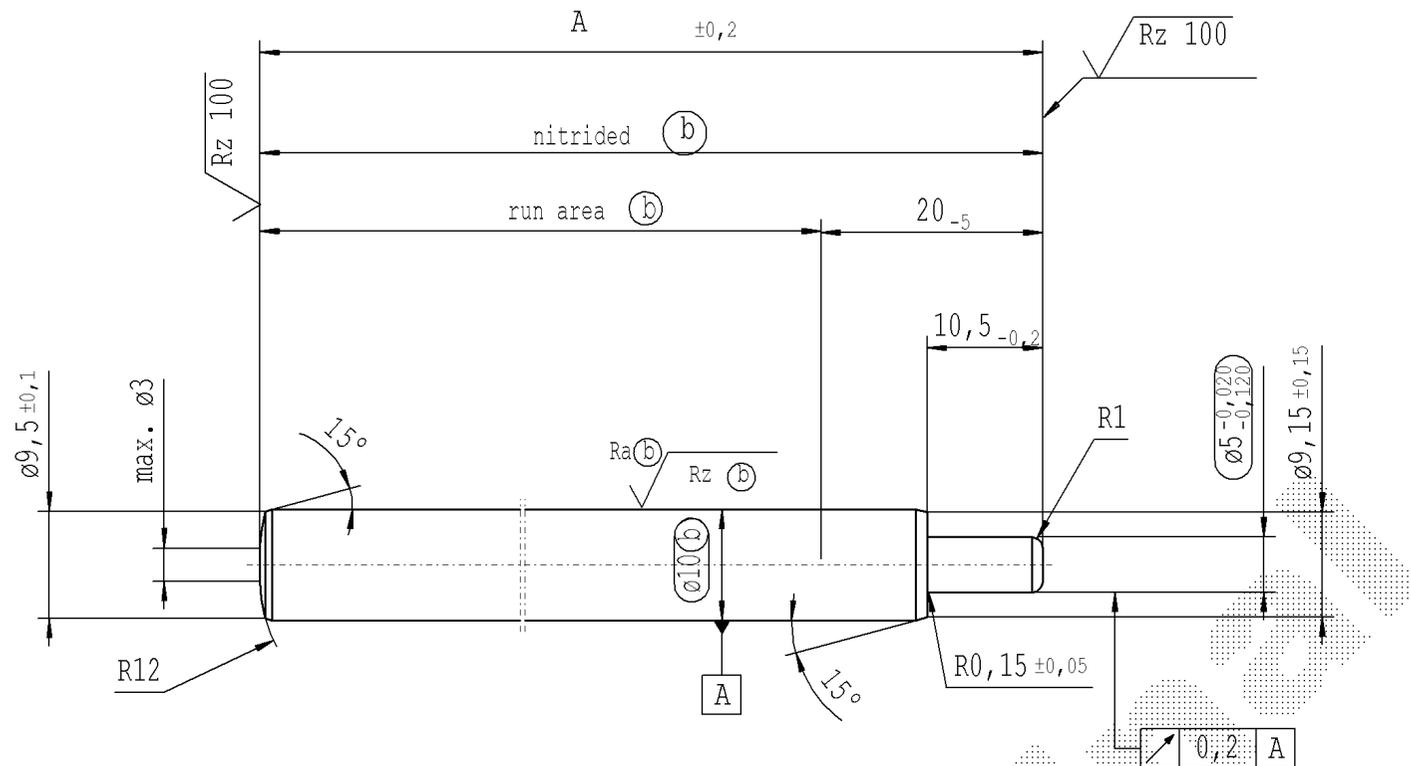

external production * material: 1.1193 S45C JISG 4051

approved lengths: 50-600 mm

$\sqrt{Rz 25}$ ($\sqrt{Rz 100}$ $Ra (b)$ $Rz (b)$) $\sqrt{+0,2}$ $\sqrt{-0,2}$

sheet 1
of 1

AIAG CQI-standards acc. to STAB-Spec. 10027692							Environmental protection acc. to STAB-Spec. 10005649						
DE: X	EN: X	ES:	IT:	PR:	FR:	RO: X	Material: *	All dimensions are in mm	Marking of special characteristics according to STAB-Spec. 10270932	Date	Name		
new	INITIAL RELEASE	new format Supplier					Edge tolerances acc. to DIN ISO 13715	Scale: (Original DIN A3) 2:1	Dimensions without tolerances DIN ISO 2768-mK	Drawn by	10.12.2019	Höfer	
old	-	Supplier drawing separately					Surface finish DIN EN ISO 1302	We reserve all rights to this document, to any patents or patent registrations related hereto, and to the duplication, retransmission by third parties and misc. use. Any use of this document is not permitted without the written consent of STABILUS.			Checked	09.11.2020	Klinkner
Field	-	-					Replaces:	Document No.:			10272399		
Date/Name	10.12.2019 Höfer	09.11.2020 Donat					Material No.:						
Chg. No.	-	692776					STABILUS			PISTON ROD			
Rev.	0	1											