


The print-out is not subject to the modification service.

Intended for internal and supplier use

EN

Ident. Doc.:
Brevellatum: 25/9/2023 - 13:14

supp. No.	material no.	A
	Surface treatment STAB-Spec. 10028959 Tab.I (b)	overall length
32	190038	156
33	220871	225
34	222544	291
35	223022	159
36	524162	105
37	956514	108
38	568618	96
39	833911	90
40	430241	114
41	060270	135
42	091818	78
43	130297	99
44	309308	261
45	879803	133
46	055493	126
47	090626	111
48	095406	141
49	127195	144
50	167826	324
51	189097	309
52	194116	216
53	575322	84
54	509121	207
55	566964	318
56	604009	327
57	537090	297
58	991668	312
59	192692	369
60	301915	195

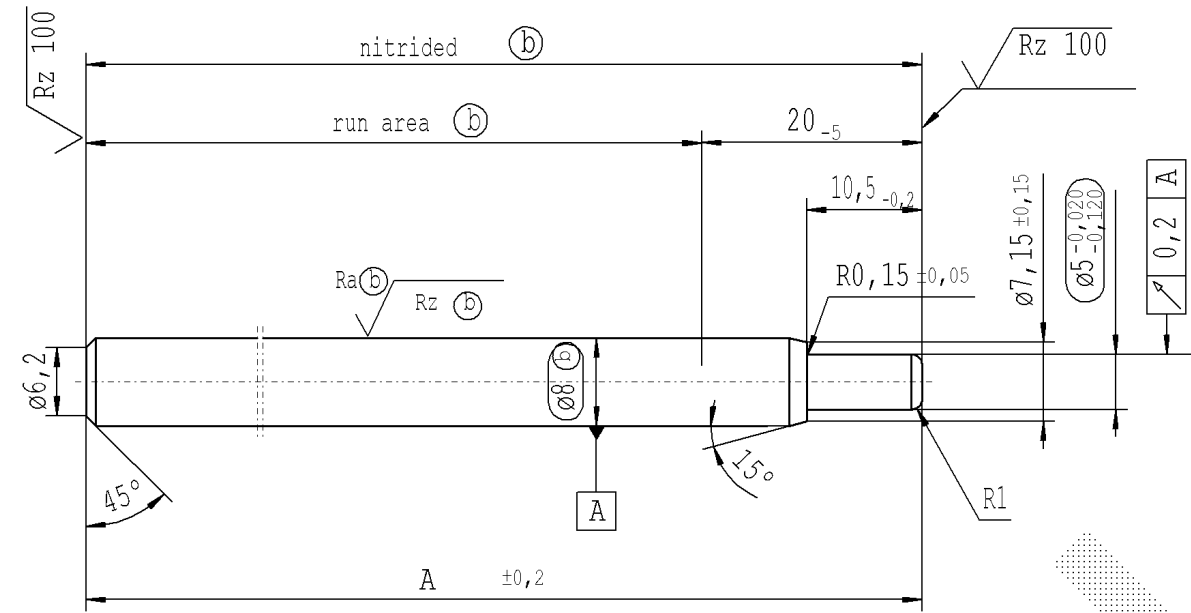

external production * material: 1.1193 S45C JISG 4051

approved lengths: 50-600 mm

sheet 2
of 3

AIAG CQI-standards acc. to STAB-Spec. 10027692						Environmental protection acc. to STAB-Spec. 10005649								
DE: X	EN: X	ES:	IT:	PR:	FR:	RO: X	CAD created document; handwritten changes not permitted			Material: *	All dimensions are in mm	Marking of special characteristics according to STAB-Spec. 10270932	Date	Name
new	50-600 mm			revised			Ⓒ = acc. STAB-Spec. 10258370	new format	Internal/Supplier		Scale: (Original DIN A3) 2:1	Dimensions without tolerances DIN ISO 2768 mK	25.04.2008	Hein
old	100-600 mm			-			Ⓒ = RHT 0,4 ... 0,7 mm	Supplier drawing	separately	Edge tolerances acc. to DIN ISO 13715			28.07.2020	Klinkner
Field	A5			-			C 5-6		-	Surface finish DIN EN ISO 1302				
Date/Name	19.07.2018 Höfer			29.08.2018 Jablonski			15.05.2019 Donat		28.07.2020 Höfer	Replaces:				Document No.: 10154964
Chg. No.	670346			671281			678703		690132					Material No.:
Rev.	6			7			8		9	STABILUS	PISTON ROD			