

The print-out is not subject to the modification service.





Intended for internal and supplier use

EN

Ident. Doc.:

Date/Name: 31/07/2023 - 9:13

supp No.	material no.			A	E
	processing and surface treatment acc. to STAB-Spec. 10006248 Tab. XVI optimized			overall length	length without endfitting stud
	(a) version 1	(a) version 1	(b) version 2		
1	105312	105312	105312	363	353
2	604961	604961	604961	414	404
3	914944	914944	914944	429	419
4	993814	993814	993814	120	110

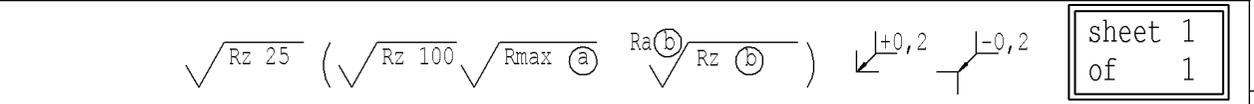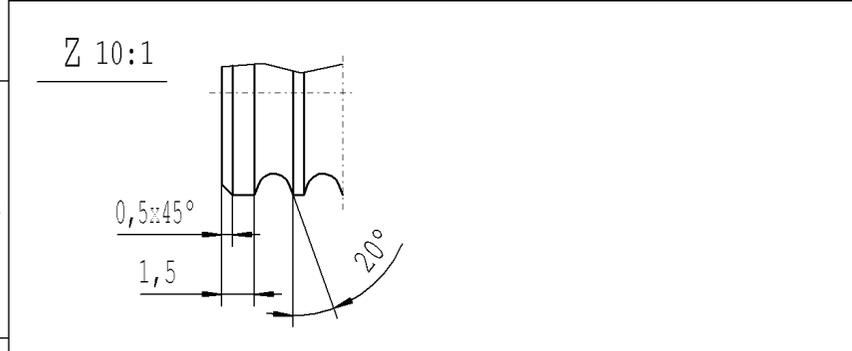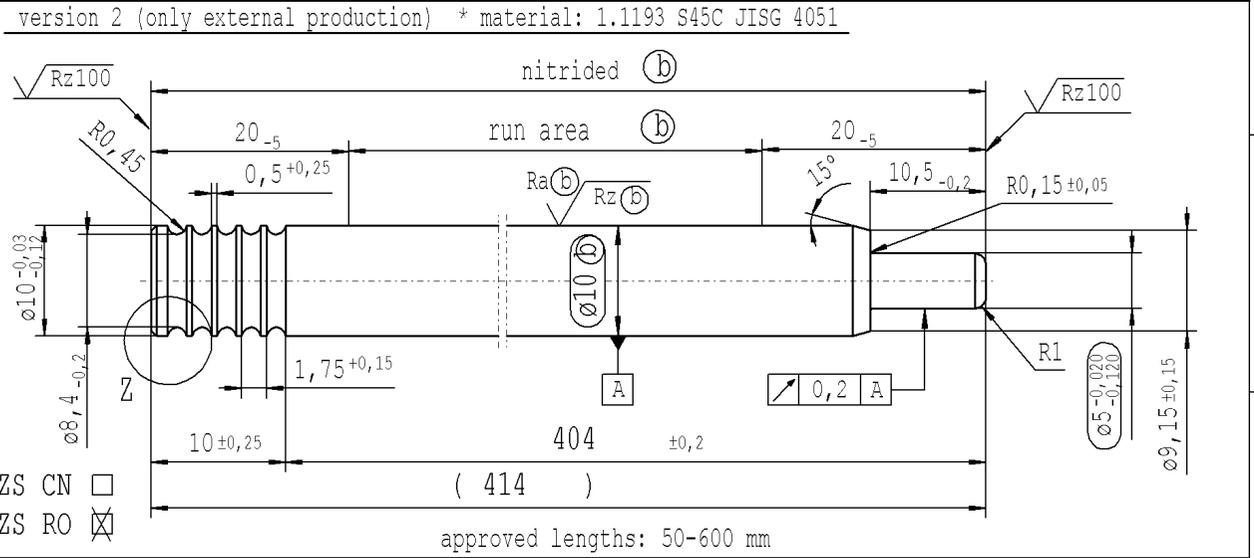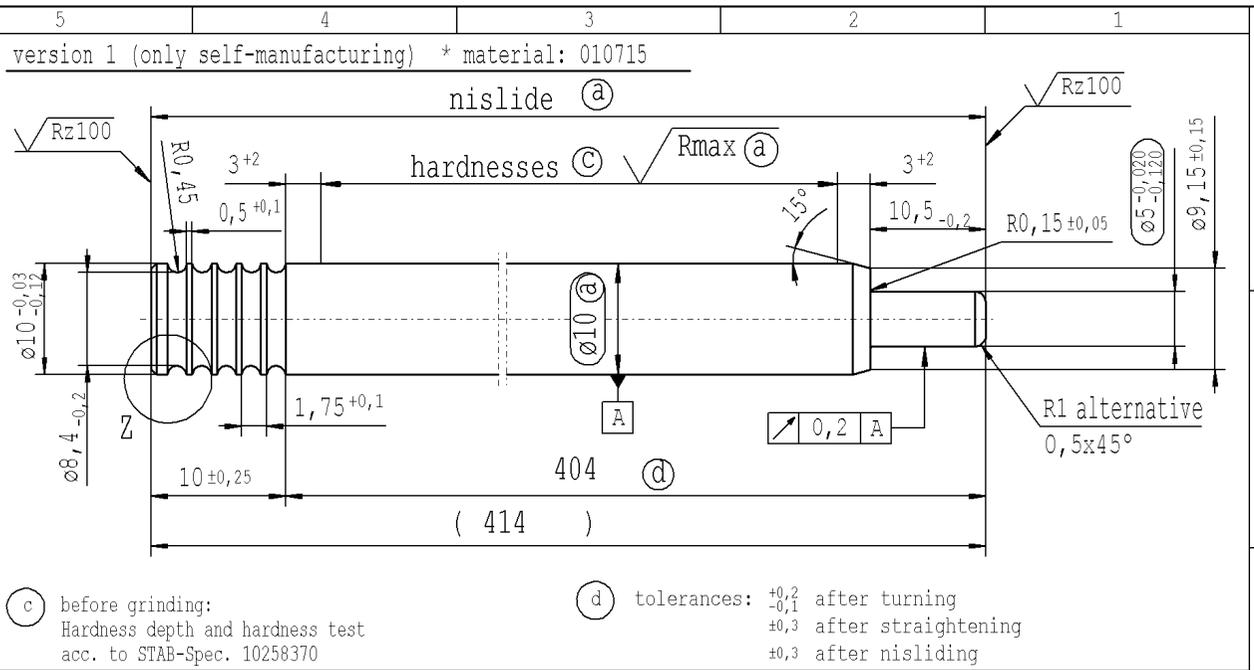

AIAG CQI-standards acc. to STAB-Spec. 10027692				Environmental protection acc. to STAB-Spec. 10005649									
DE: X	EN: X	ES:	IT:	PR:	FR:	RO: X	CAD created document handwritten changes not permitted	Material: *	All dimensions are in mm	Marking of special characteristics according to STAB-Spec. 10270932	Date	Name	
new	INITIAL RELEASE	ZS CN / ZS RO no technical change, no new first sample required			0,5 ^{+0,25}	1,75 ^{+0,15}			Scale: (Original DIN A3) 2:1	Dimensions without tolerances DIN ISO 2768-mK	Drawn by	10.05.2021	C.Hein
old	-				0,5 ^{+0,1}	1,75 ^{+0,1}		Edge tolerances acc. to DIN ISO 13715			Checked	29.09.2022	Klinkner
Field	-				B/5		C/4	Surface finish DIN EN ISO 1302	We reserve all rights to this document, to any patents or patent registrations related hereto, and to the duplication, retransmission by third parties and misc. use. Any use of this document is not permitted without the written consent of STABILUS.				Document No.:
Date/Name	10.05.2021 Hein				14.04.2022 Hein	29.09.2022 Hein		Replaces:					10293645
Chg. No.	-				709727	715739							Material No.:
Rev.	0				0	1		STABILUS	PISTON ROD				