

The print-out is not subject to the modification service.



Intended for internal and supplier use

EN



Ident. Doc.:

Date/Name

supp No.	material no.			A	E
	processing and surface treatment acc. to STAB-Spec.			overall length	length without endfitting stud
	10006248 Tab. XVI optimized version 1	10006248 Tab. X version 1	10028959 Tab. I version 2		
1	143925	143925	143925	204	196
2	508405	508405	508405	195	187
3	221129	221129	221129	180	172
4	378630	378630	378630	192	184
5	339676	339676	339676	186	178
	xxxxxx	xxxxxx	xxxxxx	150	142

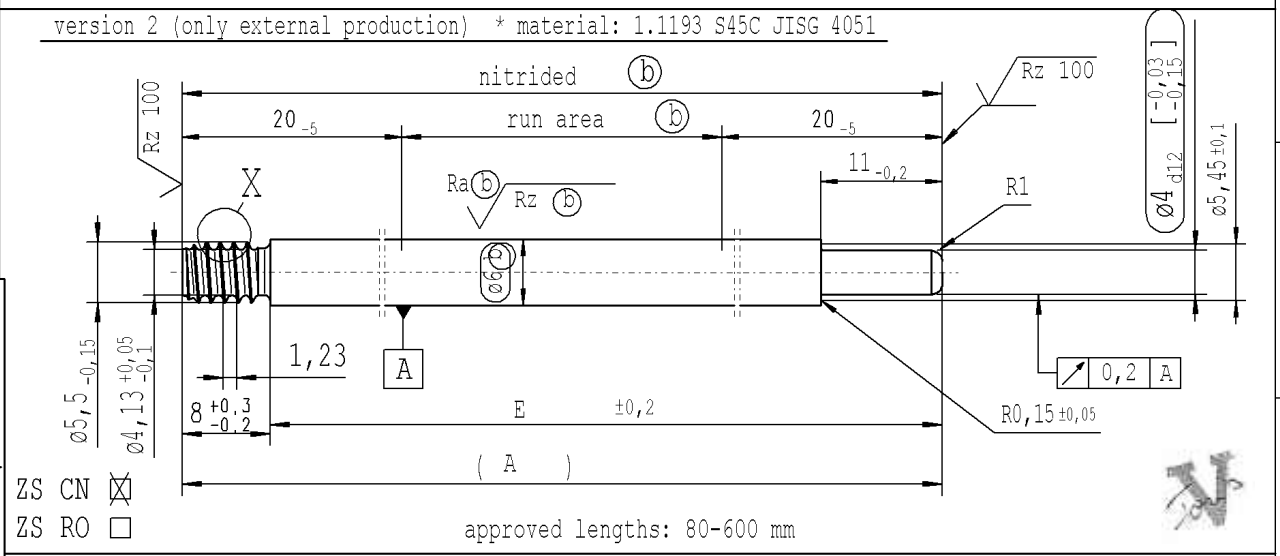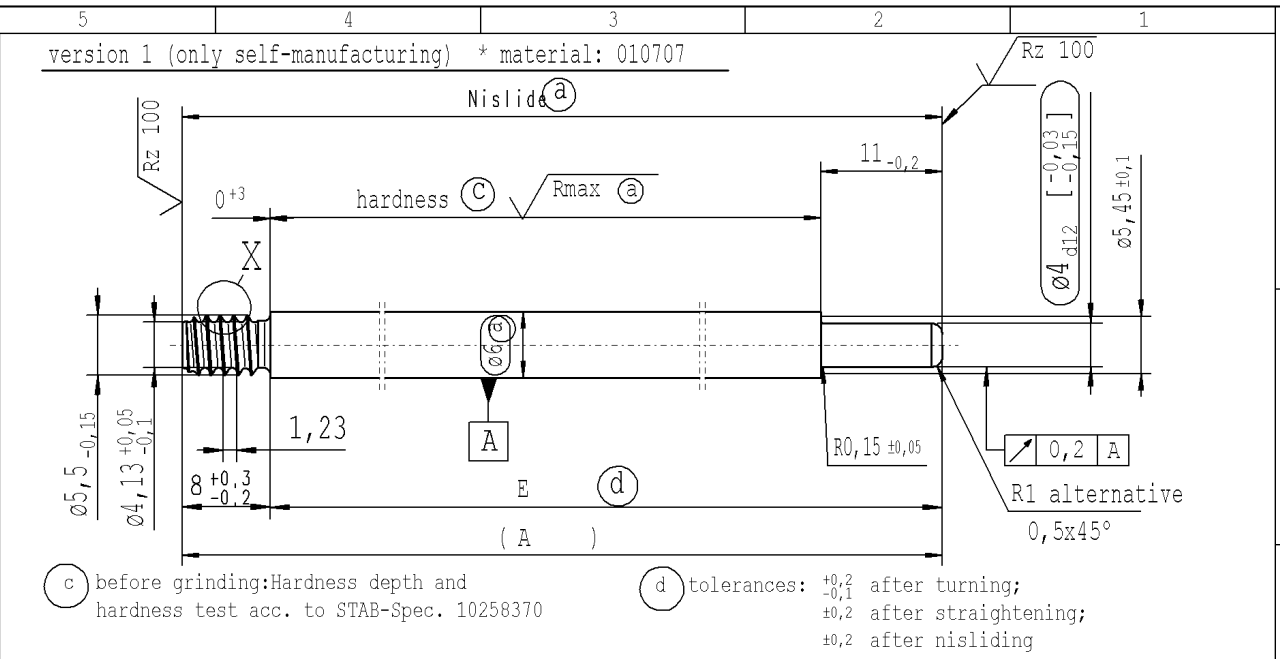

pre-worked: (only self-manufacturing)

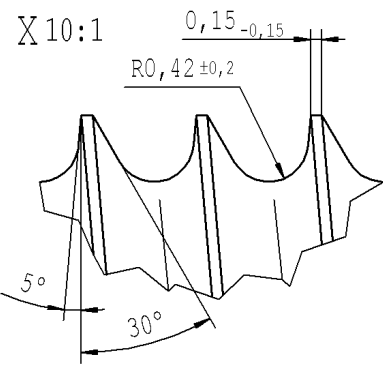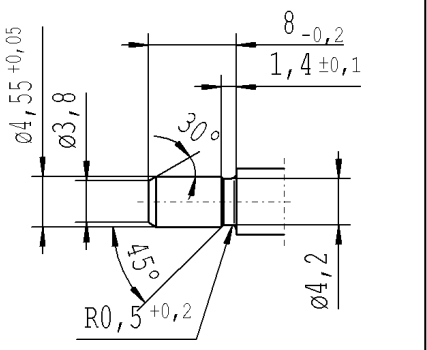

AIAG CQI-standards acc. to STAB-Spec. 10027692				Environmental protection acc. to STAB-Spec. 10005649			
DE: X	EN: X	ES:	IT:	PR:	FR:	RO: X	
new ZS CN / ZS RO; no technical change, no new first sample required			Tab.XVI; Tab. X; no technical change, no new first sample required				
old -			Tab.IV; -				
Field B/5							
Date/Name 16.09.2022 Hein			10.10.2022 Jablonski				
Chg. No. 715301			715965				
Rev. 0			0				
Material: *			All dimensions are in mm		Marking of special characteristics according to STAB-Spec. 10270932		Date 30.11.2020 Name Donat
Edge tolerances acc. to DIN ISO 13715			Scale: (Original DIN A3) 2:1		Dimensions without tolerances DIN ISO 2768-mK		Checked 10.10.2022 Schnass
Surface finish DIN EN ISO 1302			Replaces:		We reserve all rights to this document, to any patents or patent registrations related hereto, and to the duplication, retransmission by third parties and misc. use. Any use of this document is not permitted without the written consent of STABILUS.		Document No.: 10283692
<b>STABILUS</b>			<b>PISTON ROD</b>				Material No.:

sheet 1 of 1