supp. No.	material no. Surface treatment STAB-Spec. 10028959 Tab.I (b)	A overall length
1	006127	78
4	005974	96
5	006182	138
6	924947	480
8	276309	186
9	279177	117
10	311920	156
11	888152	85
12	756710	153
13	809529	75
14	809768	123
15	182633	93
16	252187	102
17	336554	135
18	807865	147
19	426422	249
20	335603	72
21	804760	81
22	184317	189
23	538993	57
24	545207	195
25	545685	270
26	546641	183
27	547119	210
28	663513	165
29	664947	168
30	666142	120
31	164721	177
32	230694	84

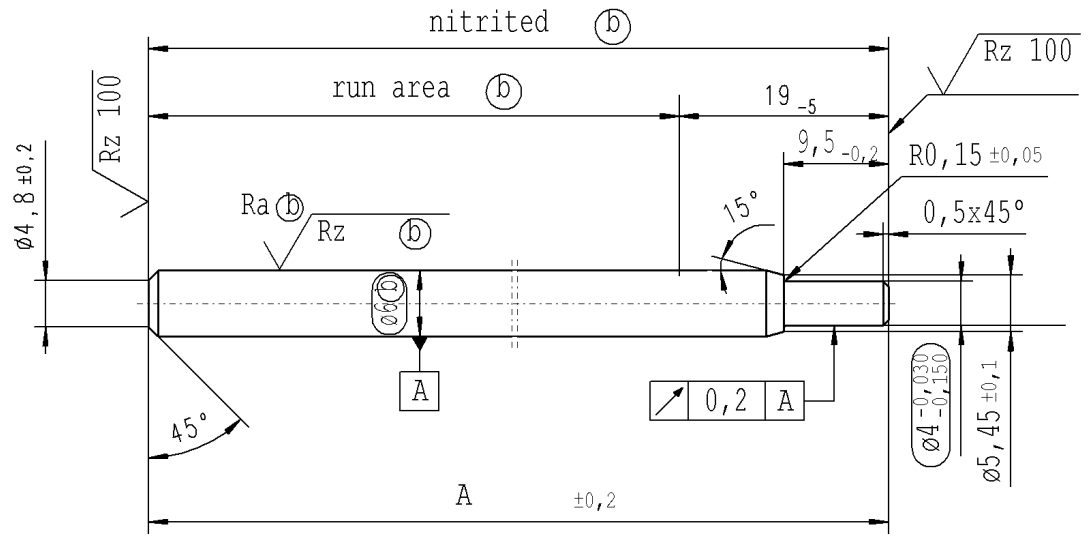

external production * material: 1.1193 S45C JISG 4051

approved lengths: 50-600 mm

ZS CN ☒
ZS RO ☐

Rz 25 (Rz 100 Ra (b) Rz (b)) +0,2 -0,2

AIAG CQI-standards acc. to STAB-Spec. 10027692

Environmental protection acc. to STAB-Spec. 10005649

DE: X	EN: X	ES:	IT:	PR:	FR:	RO: X	CAD created document; handwritten changes not permitted

new	ZhangShi	new format Internal/Supplier	ZS CN; no technical change, no new first sample required
old	China	Supplier drawing separately	-
Field	B6/F8	-	B/7
Date/Name	19.04.2017 Höfer	06.11.2020 Hein	12.09.2022 Hein
Chg. No.	655526	691604	711461
Rev.	7	8	8

Material: *

Edge tolerances acc. to DIN ISO 13715

Surface finish DIN EN ISO 1302

Replaces:

STABILUS

All dimensions are in mm

Marking of special characteristics according to STAB-Spec. 10270932

Scale: (Original DIN A3) 2:1

Dimensions without tolerances DIN ISO 2768-mK

We reserve all rights to this document, to any patents or patent registrations related hereto, and to the duplication, retransmission by third parties and misc. use. Any use of this document is not permitted without the written consent of STABILUS.

	Date	Name
Drawn by	28.04.2008	Hein
Checked	12.09.2022	Klinkner

Document No.: 10154979

Material No.:

PISTON ROD

The print-out is not subject to the modification service.
Intended for internal and supplier use
EN
Erstelldatum: 30/3/2023 - 13:23
Ident. Doc.:
***** Druckdatum: 05.12.2023 / 16:20:57 ***** Ausdruck nicht massgetreu *****
PLANT: KOB1 PRINTER : LLCHENG DOK-NR.:10154979