

The print-out is not subject to the modification service.


CONFIDENTIAL! Intended for internal and supplier use

EN

Bereit.datum: 20/2/2024 - 7:49

Ident. Doc.:

supp. No.	material no.	A
1	797102	129
Surface treatment STAB-Spec. 10028959 Tab.I		
overall length		

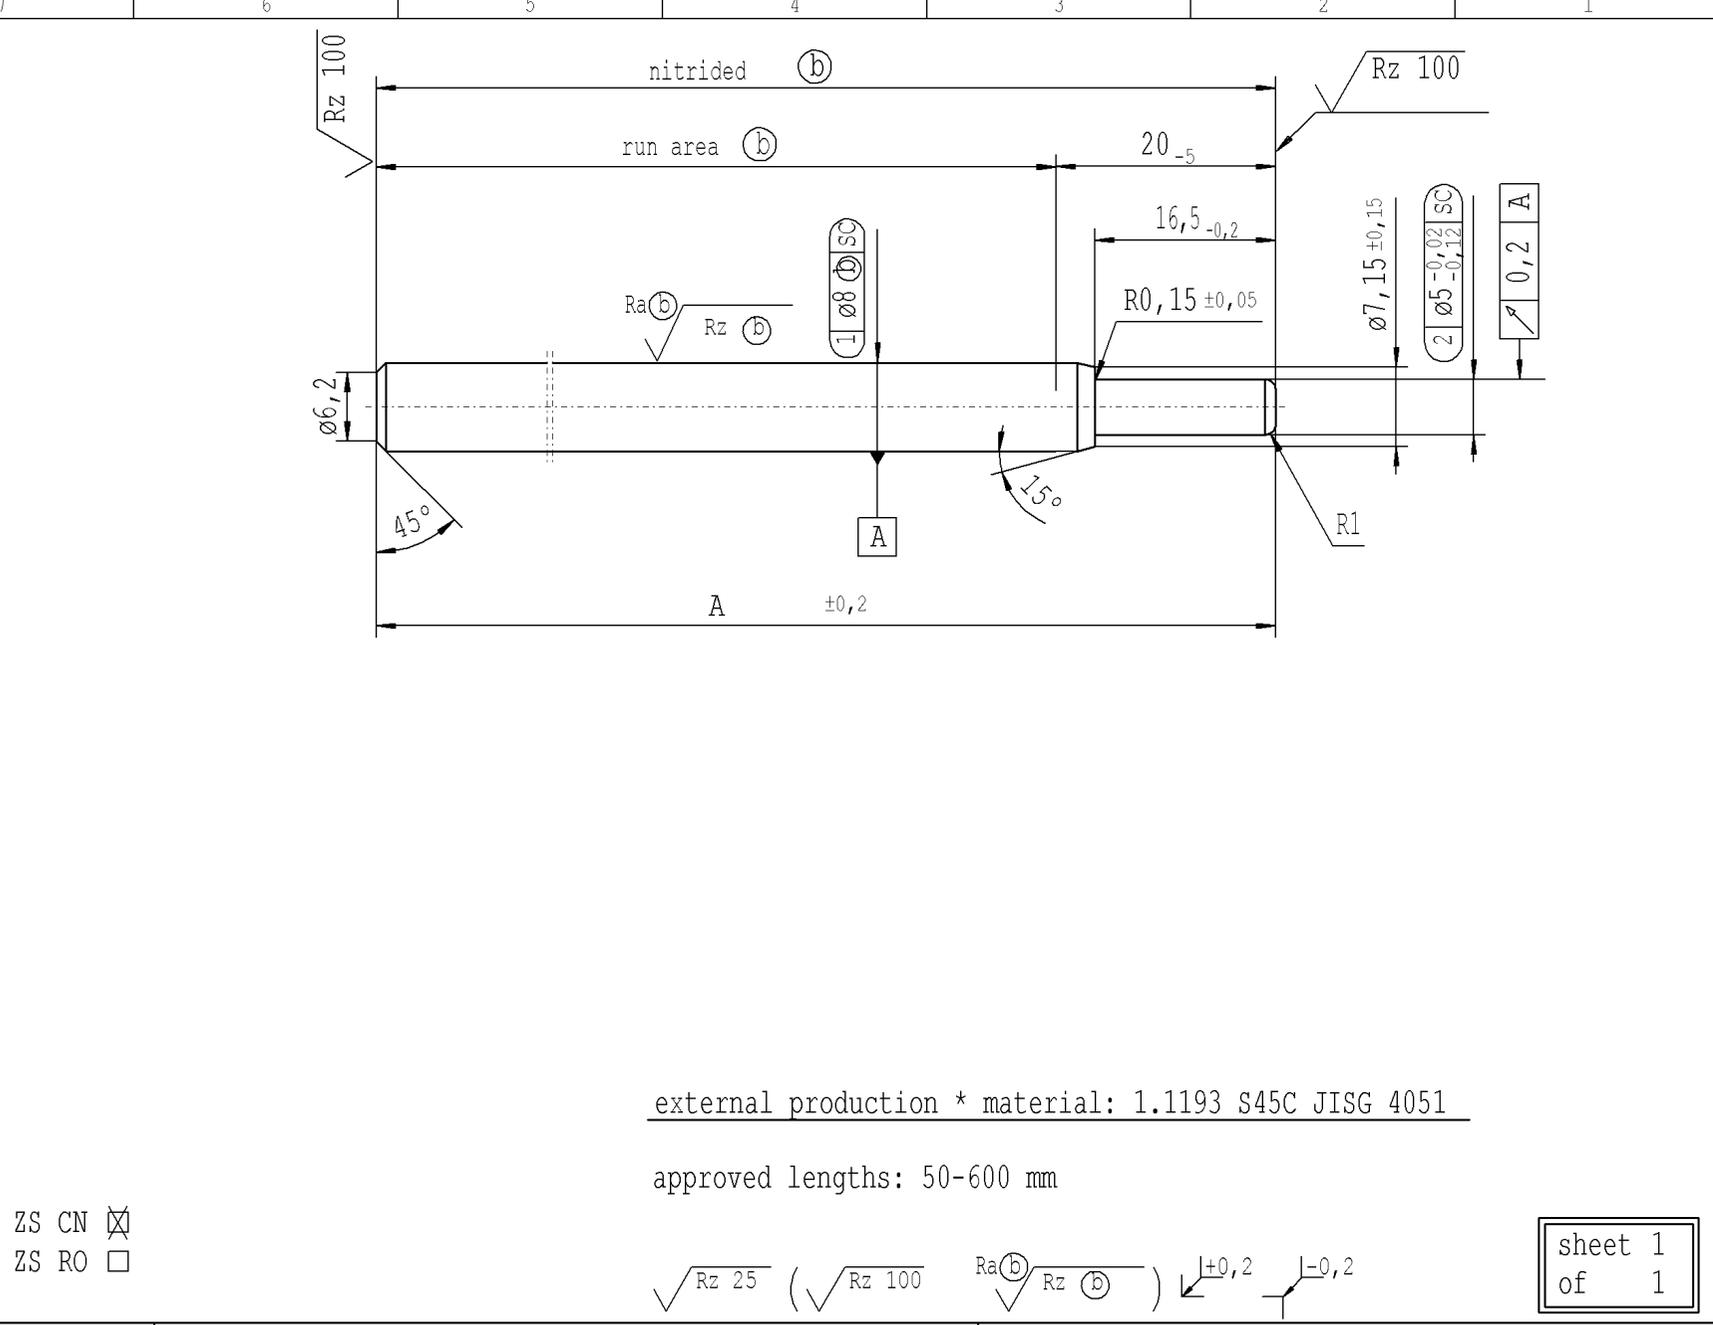

external production * material: 1.1193 S45C JISG 4051

approved lengths: 50-600 mm

ZS CN
ZS RO

$\sqrt{Rz 25}$ ($\sqrt{Rz 100}$ Ra (circled b) Rz (circled b)) $\pm 0,2$ $-0,2$

sheet 1
of 1

AIAG CQI-standards acc. to STAB-Spec. 10027692										Environmental protection acc. to STAB-Spec. 10005649									
DE: X	EN: X	ES:	IT:	PR:	FR:	RO: X	CAD created document; handwritten changes not permitted			Material:	*	All dimensions are in mm		Marking of special characteristics according to STAB-Spec. 10270932		Date	Name		
new	© = acc. STAB-Spec. 10258370		new format Internal/Supplier			$\varnothing 5_{-0,02}^{+0,12}$					Scale: (Original DIN A3) 2:1		Dimensions without tolerances DIN ISO 2768 mK		Drawn by	27.08.2018	Jablonski		
old	© = RHT 0,4 0,7 mm		Supplier drawing separately			$\varnothing 5_{-0,02}^{+0,12}$									Checked	28.02.2024	Klinkner		
Field	C1-2																Document No.:	10257375	
Date/Name	24.04.2019 Höfer		28.01.2024 Jablonski														Material No.:		
Chg. No.	678037		690132																
Rev.	3		4																
STABILUS										PISTON ROD									