
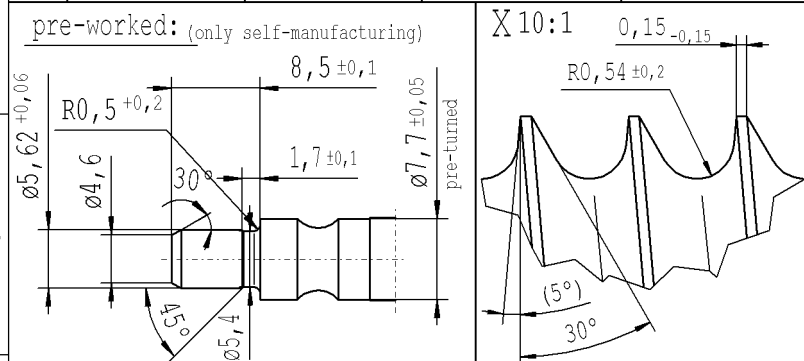
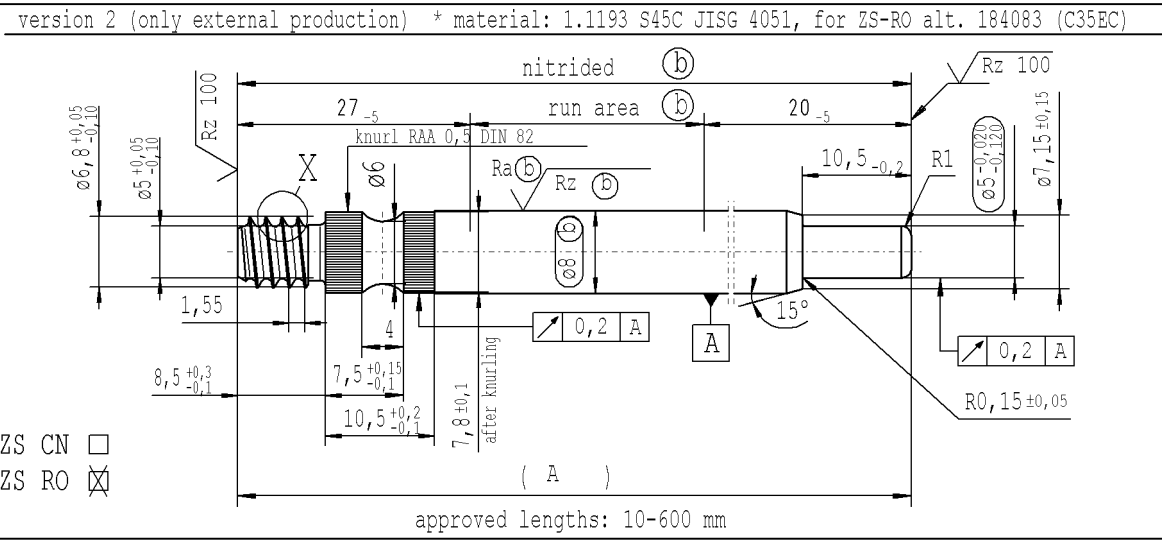


The print-out is not subject to the modification service.

CONFIDENTIAL! Intended for internal and supplier use

Ident. Doc.: ERP011.dwg; 1/11/2023 - 12:59

supp No.	material no.			A
	processing and surface treatment acc. to STAB-Spec.			
	10006248 Tab. XVI optimized (a) version 1	10006248 Tab. X (a) version 1	10028959 Tab. I (b) version 2	
21	376239	376239	376239	276.0
22	382931	382931	382931	248.0
23	467537	467537	467537	300.5
24	631491	631491	631491	192.0
25	650611	650611	650611	336.0
26	750518	750518	750518	324.0
27	772028	772028	772028	270.0
xx	xxxxxxx	xxxxxxx	xxxxxxx	324

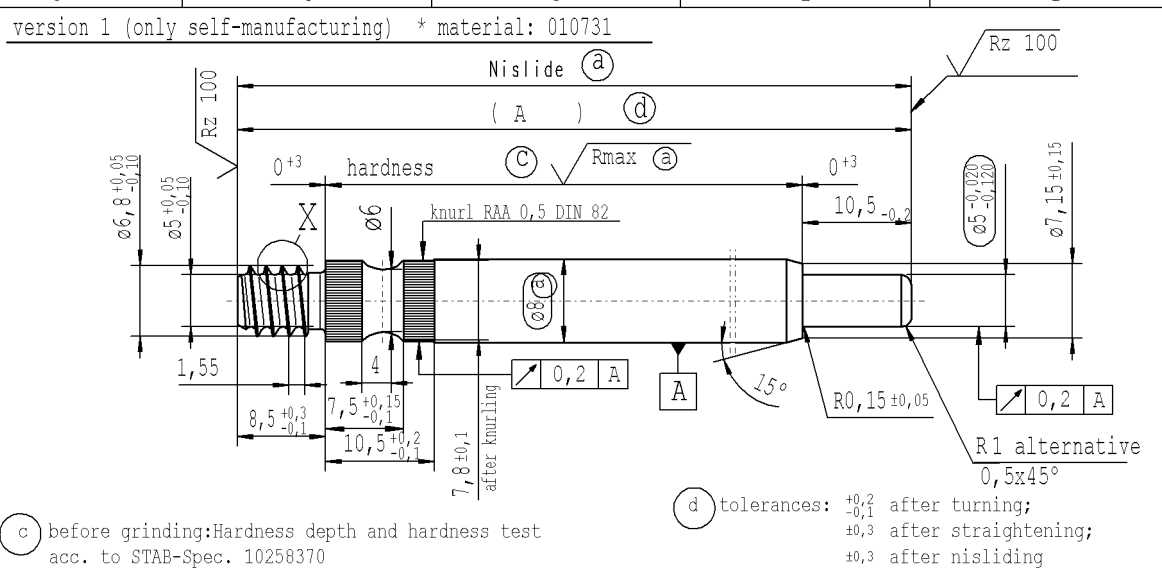

DE: X				EN: X				ES:				IT:				PR:				FR:				RO: X				Material: *				All dimensions are in mm				Marking of special characteristics according to STAB-Spec. 10270932				Date: 05.12.2007				Name: Höfer			
new				Tab XVI; no technical change, no new first sample required				ø7,7±0,05 pre-turned; ø7,7±0,05 after knurling / Tol. changed																								Drawn by: 06.06.2023				Klinkner											
old				Tab IV;																																											
Field				F 8				B-C/7-8; B-E/3																																							
Date/Name				16.08.2021 Donat				06.06.2023 Hein																																							
Chg. No.				699704				721972																																							
Rev.				3				4																																							

sheet 2 of 2

STABILUS

PISTON ROD

SIGNATURE ELECTRONICALLY GENERATED