

The print-out is not subject to the modification service.


Intended for internal and supplier use

Ident. Doc.: 16/9/2022 - 10:32

Ident. Doc.:

supp No.	material no.	A
	Surface treatment STAB-Spec. 10028959 Tab.I (b)	overall length
1	006127	78
4	005974	96
5	006182	138
6	924947	480
8	276309	186
9	279177	117
10	311920	156
11	888152	85
12	756710	153
13	809529	75
14	809768	123
15	182633	93
16	252187	102
17	336554	135
18	807865	147
19	426422	249
20	335603	72
21	804760	81
22	184317	189
23	538993	57
24	545207	195
25	545685	270
26	546641	183
27	547119	210
28	663513	165
29	664947	168
30	666142	120
31	164721	177

ZS CN   
ZS RO

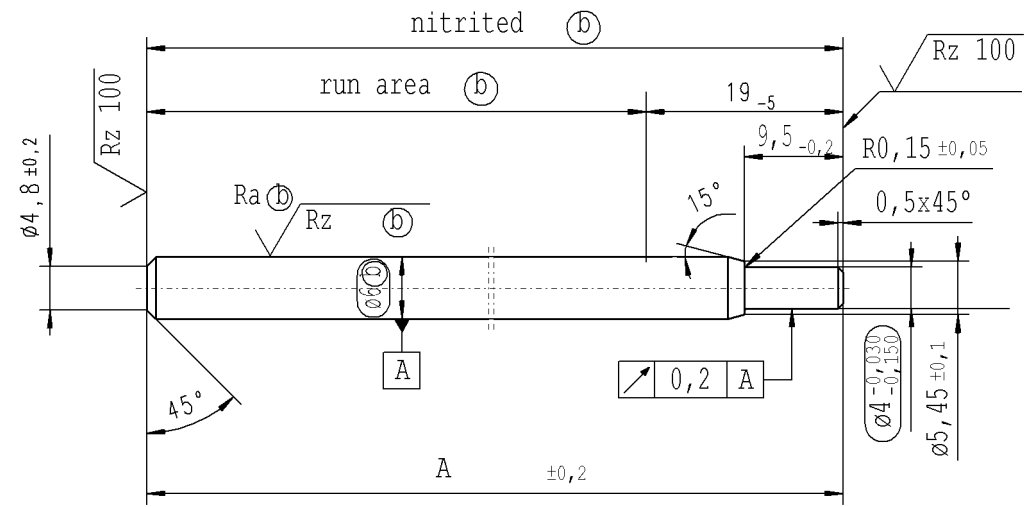

external production \* material: 1.1193 S45C JISG 4051

approved lengths: 50-600 mm

sheet 1  
of 1

DE: X EN: X ES: IT: PR: FR: RO: X										Material: *		All dimensions are in mm		Marking of special characteristics according to STAB-Spec. 10270932		Date		Name			
CAD created document; handwritten changes not permitted																28.04.2008		Hein			
new ZhangShi new format Internal/Supplier ZS CN; no technical change, no new first sample required																Checked		12.09.2022		Klinkner	
old China Supplier drawing separately -										Edge tolerances acc. to DIN ISO 13715		Scale: (Original DIN A3) 2:1		Dimensions without tolerances DIN ISO 2768-mK							
Field B6/P8 - B/7										Surface finish DIN EN ISO 1302		We reserve all rights to this document, to any patents or patent registrations related hereto, and to the duplication, retransmission by third parties and misc. use. Any use of this document is not permitted without the written consent of STABILUS.				Document No.:		10154979			
Date/Name 19.04.2017 H8fer 06.11.2020 Hein 12.09.2022 Hein										Replaces:						Material No.:					
Chg. No. 655526 691604 711461																					
Rev. 7 8 8										<b>STABILUS</b>											
																		PISTON ROD			

