


The print-out is not subject to the modification service.

CONFIDENTIAL! Intended for internal and supplier use

Ident. Doc.: 8/1/2024 - 30.12

supp No.	material no.	A
	Surface treatment STAB-Spec. 10028959 Tab.I	overall length
61	364772	279
x	xxxxxx	90

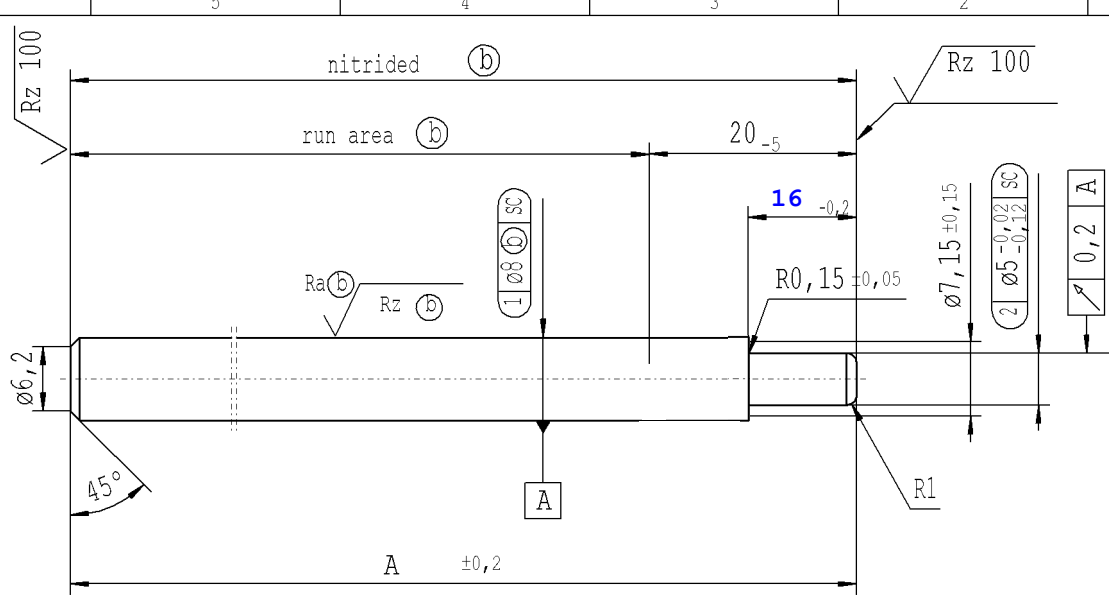

external production \* material: 1.1193 S45C JISG 4051

approved lengths: 50-600 mm

ZS CN   
ZS RO

$\sqrt{Rz\ 25}$  ( $\sqrt{Rz\ 100}$   $Ra\ (b)$   $Rz\ (b)$ )  $\pm 0,2$   $\pm 0,2$

sheet 3  
of 3

AIAG CQI-standards acc. to STAB-Spec. 10027692							Environmental protection acc. to STAB-Spec. 10005649					
DE: X	EN: X	ES:	IT:	PR:	FR:	RO: X	Material: *	All dimensions are in mm	Marking of special characteristics according to STAB-Spec. 10270932	Drawn by	Date	Name
new	© = acc. STAB-Spec. 10258370	new format Internal/Supplier		CRD created document; handwritten changes not permitted			ø5 <sup>-0,02</sup> <sub>0,12</sub> ; no technical change, no new first sample required	Scale: (Original DIN A3) 2:1	Dimensions without tolerances DIN ISO 2768 mK	Checked	25.04.2008	Hein
old	© = RHT 0,4 ... 0,7 mm	Supplier drawing separately					ø5 <sup>-0,020</sup> <sub>0,120</sub>	Edge tolerances acc. to DIN ISO 13715		09.11.2023	Klinkner	
Field	C 5-6						Surface finish DIN EN ISO 1302	We reserve all rights to this document, to any patents or patent registrations related hereto, and to the duplication, retransmission by third parties and misc. use. Any use of this document is not permitted without the written consent of STABILUS.				
Date/Name	15.05.2019 Donat		28.07.2020 Höfer		09.11.2023 Jablonski		Replaces:	Document No.: <b>10154964</b>				
Chg. No.	678703		690132		727774			Material No.:				
Rev.	8		9		9		<b>STABILUS</b>	<b>PISTON ROD</b>				

**NEW**

