




The print-out is not subject to the modification service.

Intended for internal and supplier use

EN

Ident. Doc.:

supp No.	material no.			A	E
	processing and surface treatment acc. to STAB-Spec.			overall length	length without endfitting stud
	10006248 Tab. XVI optimized version 1	10006248 Tab. X version 1	10028959 Tab. I version 2		
1	143925	143925	143925	204	196
2	508405	508405	508405	195	187
3	221129	221129	221129	180	172
4	378630	378630	378630	192	184
5	339676	339676	339676	186	178
6	182177	182177	182177	150	142
7	986890	986890	986890	240	232

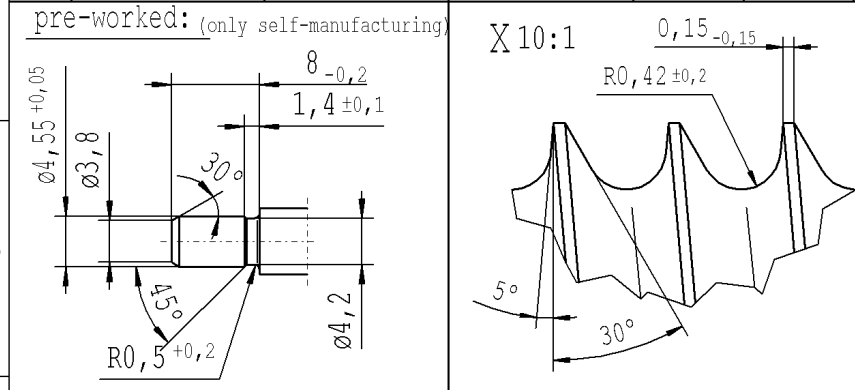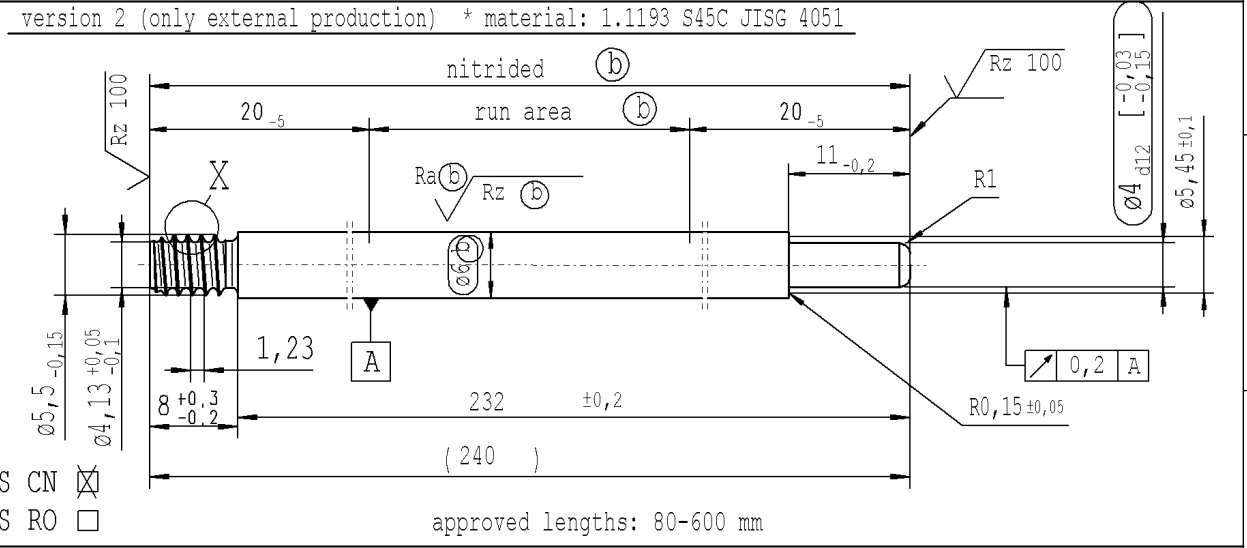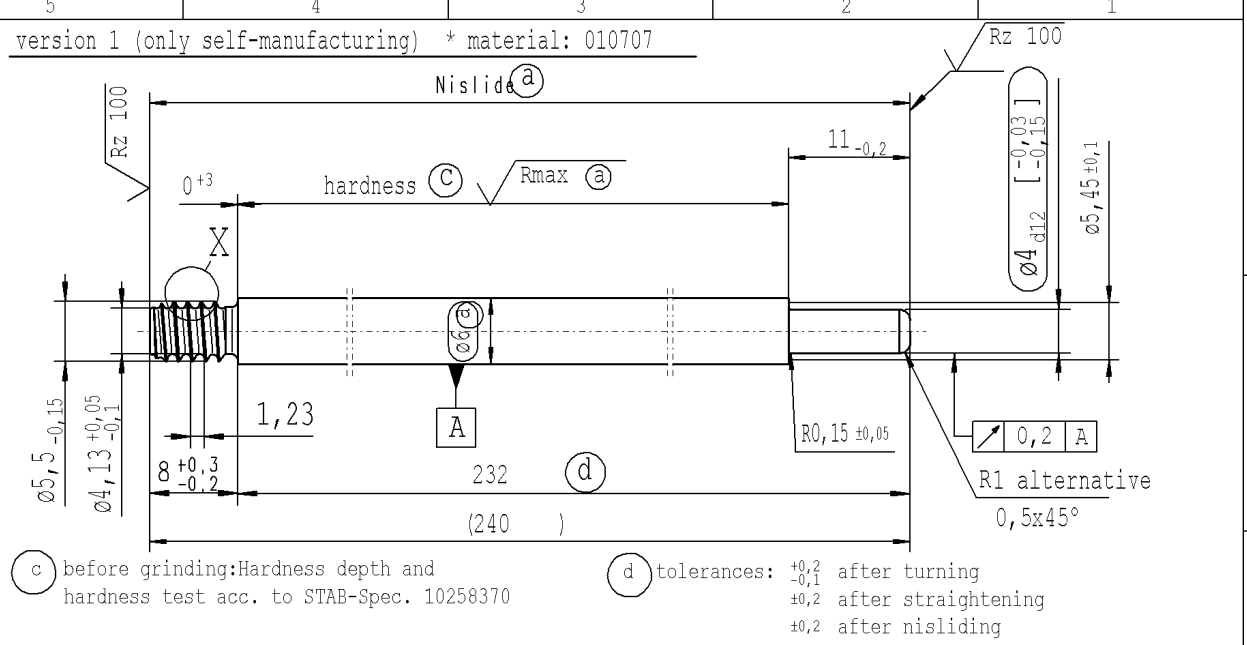

AIAG CQI-standards acc. to STAB-Spec. 10027692				Environmental protection acc. to STAB-Spec. 10005649			
DE: X	EN: X	ES:	IT:	PR:	FR:	RO: X	CAD created document handwritten changes not permitted
new	ZS CN / ZS RO no technical change, no new first sample required			Tab.XVI Tab. X no technical change, no new first sample required			
old	-			Tab.IV -			
Field	B/5			-			
Date/Name	16.09.2022 Hein			10.10.2022 Jablonski			
Chg. No.	715301			715965			
Rev.	0			0			
Material: *		All dimensions are in mm		Marking of special characteristics according to STAB-Spec. 10270932		Date: 30.11.2020 Name: Donat	
Edge tolerances acc. to DIN ISO 13715		Scale: (Original DIN A3) 2:1		Dimensions without tolerances DIN ISO 2768-mK		Checked: 10.10.2022 Schnass	
Surface finish DIN EN ISO 1302		Replaces:		We reserve all rights to this document, to any patents or patent registrations related hereto, and to the duplication, retransmission by third parties and misc. use. Any use of this document is not permitted without the written consent of STABILUS.		Document No.: 10283692	
STABILUS		PISTON ROD		Material No.:			

sheet 1 of 1