

The print-out is not subject to the modification service.

CONFIDENTIAL! Intended for internal and supplier use


EN

Printed: 24/07/2024 - 12:16

Ident. Doc.:

supp. No.	material no.	A
	Surface treatment STAB-Spec. 10028959 Tab.I (b)	overall length
1	006127	78
4	005974	96
5	006182	138
8	276309	186
9	279177	117
10	311920	156
11	888152	85
15	182633	93
16	252187	102
17	336554	135
18	807865	147
19	426422	249
20	335603	72
21	804760	81
22	184317	189
23	538993	57
24	545207	195
25	545685	270
26	546641	183
27	547119	210
28	663513	165
29	664947	168
30	666142	120
31	164721	177
32	230694	84
33	571270	144
34	251489	108
35	486427	87

ZS CN   
ZS RO

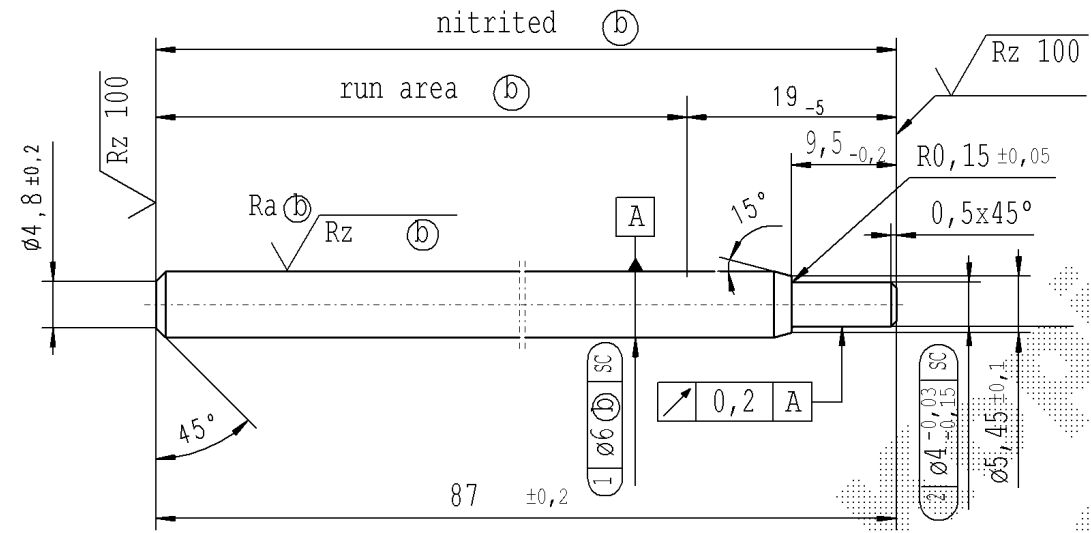

external production \* material: 1.1193 S45C JISG 4051

sheet 1  
of 1

AIAG CQI-standards acc. to STAB-Spec. 10027692									
DE: X	EN: X	ES:	IT:	PR:	FR:	RO: X	CAD created document handwritten changes not permitted		
new	Text "approved lengths: ... mm" deleted no technical change, no new first sample required								
old									
Field									
Date/Name	22.07.2024 Jablonski								
Chg. No.	733041								
Rev.	8								

Environmental protection acc. to STAB-Spec. 10005649		
Material:	All dimensions are in mm	Marking of special characteristics according to STAB-Spec. 10270932
Scale:	(Original DIN A3) 2:1	Dimensions without tolerances DIN ISO 2768-mK
Edge tolerances acc. to DIN ISO 13715		
Surface finish: DIN EN ISO 1302		
Replaces:		
We reserve all rights to this document, to any patents or patent registrations related hereto, and to the duplication, retransmission by third parties and misc. use. Any use of this document is not permitted without the written consent of STABILUS.		Document No.: 10154979
<b>STABILUS</b>		Material No.:
PISTON ROD		