
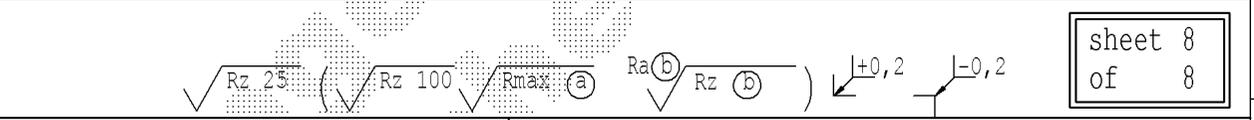
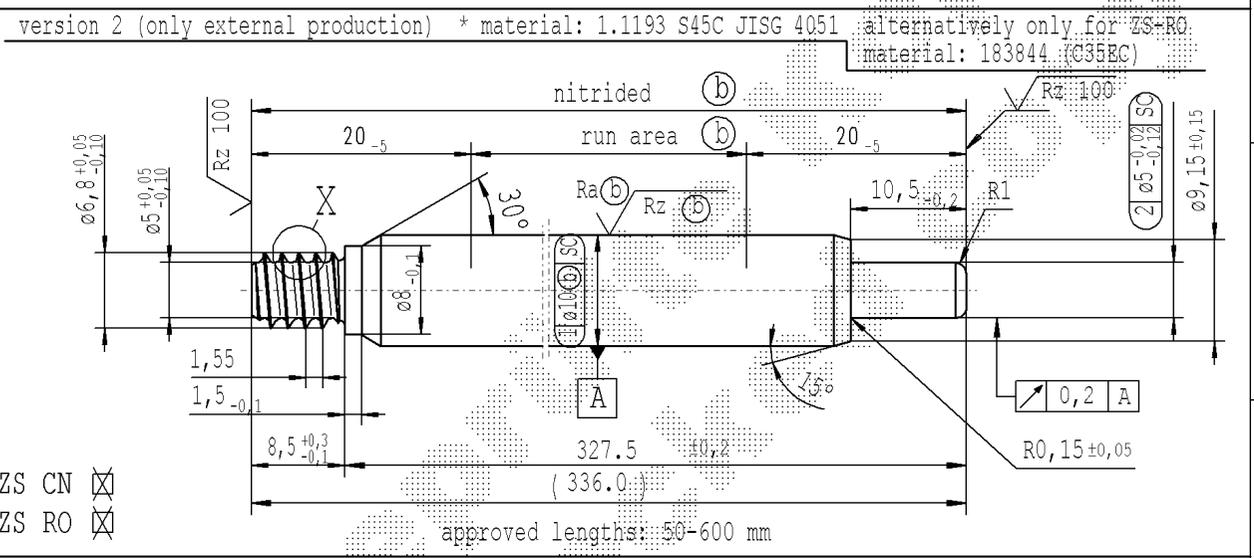


The print-out is not subject to the modification service.

CONFIDENTIAL! Intended for internal and supplier use

Ident. Doc.:

supp No.	material no.			A	E
	processing and surface treatment acc. to STAB-Spec. 10006248 Tab. XVI optimized version 1	10006248 Tab. X version 1	10028959 Tab. I version 2	overall length	length without endfitting stud
147	246461	246461	246461	296.0	287.5
148	323658	323658	323658	528.0	519.5
149	324853	324853	324853	192.0	183.5
150	349231	349231	349231	411.0	402.5
151	356401	356401	356401	207.0	198.5
152	396075	396075	396075	93.0	84.5
153	514141	514141	514141	108.0	99.5
154	043073	043073	043073	342.0	333.5
155	761029	761029	761029	396.0	387.5
156	659456	659456	659456	147.0	138.5
157	685029	685029	685029	292.0	283.5
158	685985	685985	685985	341.0	332.5
159	688375	688375	688375	289.0	280.5
160	695545	695545	695545	348.5	340.0
161	811699	811699	811699	339.0	330.5
162	180501	180501	180501	588.0	579.5
163	227345	227345	227345	498.0	489.5
164	342783	342783	342783	516.0	507.5
165	153740	153740	153740	336.0	327.5

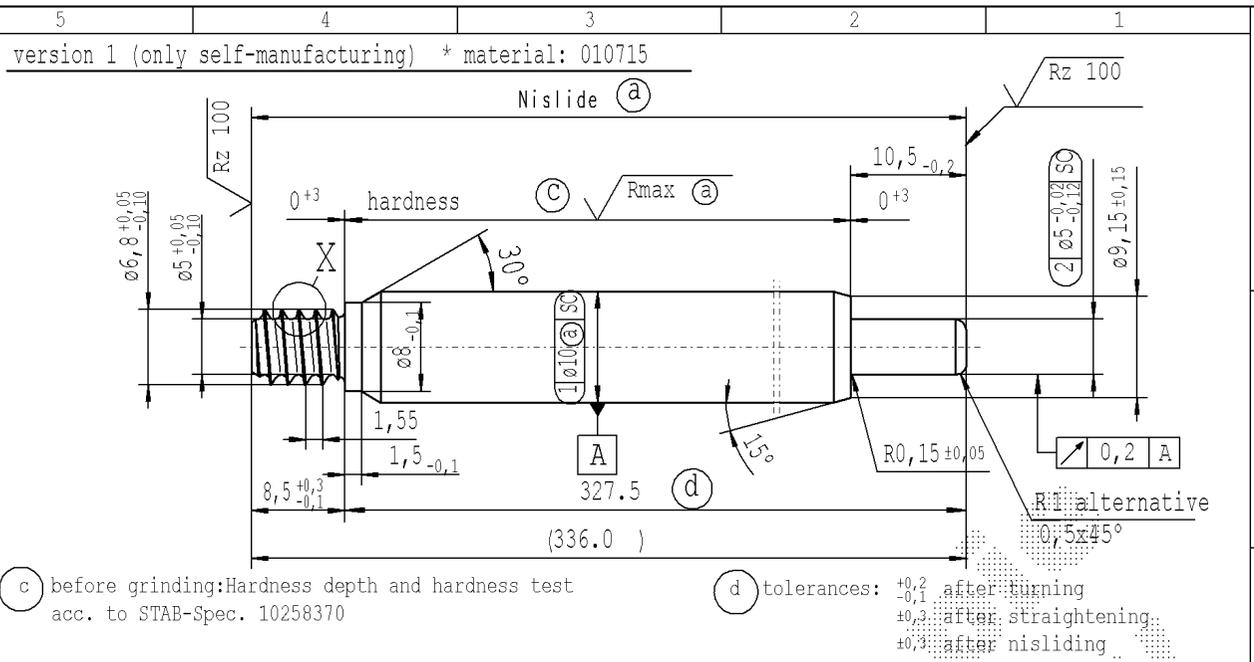

DE: X EN: X ES: X IT: PR: FR: RO: X		CAD created document handwritten changes not permitted		Material: *		All dimensions are in mm		Marking of special characteristics according to STAB-Spec. 10270932		Date: 17.12.2007 Name: C.Hein	
new version 2 alternatively only for ZS-RO material: 183844 (C35EC)		ø5 ^{+0,02} _{-0,12} span. version created no technical change, no new first sample required		ø5 ^{-0,020} _{-0,120}		Scale: (Original DIN A3) 2:1		Dimensions without tolerances DIN ISO 2768-mK		Checked: 06.02.2024 Klinkner	
old -		-		-		We reserve all rights to this document, to any patents or patent registrations related hereto, and to the duplication, retransmission by third parties and misc. use. Any use of this document is not permitted without the written consent of STABILUS.		Document No.: 10151520		Material No.:	
Field D/1-5		26.07.2022 Hein		06.02.2024 Jablonski		STABILUS		PISTON ROD			
Chg. No. 713496		730447		730447							
Rev. 14		14		14							

sheet 8 of 8

pre-worked: (only self-manufacturing)

pre-worked: (only self-manufacturing)

X 10:1

approved lengths: 50-600 mm

ZS CN
ZS RO

AIAG CQI-standards acc. to STAB-Spec. 10027692

Environmental protection acc. to STAB-Spec. 10005649